



Fast FACTS

CVM | GDM | TVM | TAC | TOAM



The logo features a stylized, light green leaf-like shape with a central vein, positioned to the left of the text.

True[®]
REFRIGERATION

One Swing Door

CVM-11-HC~EGC01
CVM-13-HC~EGC01
CVM-27-HC~EGC01
GDM-06-34-HC~TSL01
GDM-06-34-HC~TSL01-EXTTOP
GDM-07-HC~FGD01
GDM-08-HC~TSL01
GDM-10-HC~TSL01
GDM-10PT-HC~TSL01
GDM-10SSL-HC~TSL01
GDM-10-58-HC~TSL01
GDM-12-HC~TSL01
GDM-15-RTO-HC-LD
GDM-19T-HC~TSL01
GDM-23-HC~TSL01
GDM-26-HC~TSL01
T-11G-HC~TSL01

Two Swing Doors

GDM-10PT-HC~TSL01 (1fr/1bk)
GDM-14RF-HC-LD

GDM-35-HC~TSL01
GDM-35SL-RF-HC-LD
GDM-43-HC~TSL01
GDM-49-HC~TSL01
TVM-30-HC~VM03
TVM-30SL-HC-VM03
TVM-36SL-HC~VM03
TVM-48-HC~VM01
TVM-48SL-HC~VM01
TVM-48SL-48-HC~VM01
TVM-48SL-54-HC~VM01

Three Swing Doors

GDM-72-HC~TSL01

Two Slide Doors

GDM-09-SQ-HC-LD
GDM-33-HC-LD
GDM-33C-60-HC-LD
GDM-33SSL-56-HC-LD
GDM-37-HC-LD
GDM-41-HC-LD
GDM-41SL-HC-LD

GDM-41C-48-HC-LD
GDM-41SL-48-HC-LD
GDM-41SL-54-HC-LD
GDM-41SL-60-HC-LD
GDM-45-HC-LD
GDM-47-HC-LD

Three Slide Doors

GDM-69-HC-LD

Four Slide Doors (2 front, 2 back)

GDM-33CPT-54-HC-LD
GDM-41CPT-48-HC-LD

Air Curtain Merchandisers

(no doors)

TAC-14GS-HC-LD
TOAM-30-HC
TOAM-30GS-HC
TOAM-36-HC-TSL01
TOAM-36GS-HC-TSL01
TOAM-48-HC
TOAM-48GS-HC
TOAM-72-HC
TOAM-72GS-HC




1. Refrigeration System By matching and balancing hydrocarbon refrigeration with the latest refrigeration components, TRUE engineers environmentally friendly refrigeration systems with shorter run times, lower energy consumption, and the industry's coldest holding temperatures. TRUE has taken a large step in reducing its carbon footprint with the use of a hydrocarbon refrigerant, R290. R290 is an environmentally friendly refrigerant with a Global Warming Potential (GWP) of 0.02, compared to refrigerants of the past, R404a and R134a, whose GWPs are 3922 and 1430 respectively.



2. Quality Components TRUE uses quality components to ensure a long life of refrigeration with minimal energy consumption. State-of-the-art components such as energy-efficient compressors and electrically commutated motors are used to exceed energy standards without sacrificing the workload. LED lights have been introduced in TRUE units to offer a brilliant display while saving energy and reducing heat within.



3. Self-Cleaning (RCU) Technology eliminates the need to clean the condenser coil, reduces energy consumption and helps maintain the coldest temperatures and freshest products..

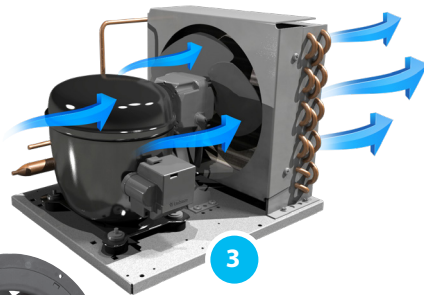




4. High-Density Insulation TRUE continues its commitment to sustainability with the use of foamed-in-place, CFC-free, polyurethane, high-density insulation that provides unparalleled strength and rigidity. In addition to our already industry exceeding insulation factor, our insulation has zero ozone depleting (ODP) and zero global warming potential (GWP).



5. Durable PVC Coated Shelving True manufactures its own heavy-duty wire shelves, utilizing larger diameter steel for strength. Shelving is bonded with powdered PVC to prevent chipping and peeling which is prevalent in standard epoxy coated shelves.



6. After Sale Support Along with its Warranty. At no additional cost, our customers enjoy the option of having the entire condensing unit replaced. This consists of a new compressor, condenser, start components, and fan motor, all of which are pre-assembled and shipped from the factory.

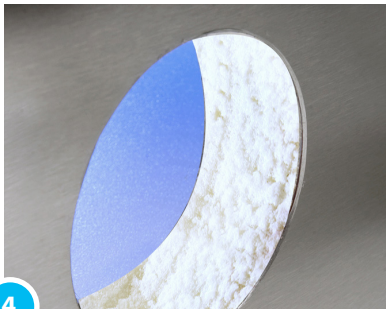

4



5



6



7. Energy Efficiency TRUE is committed to eco-friendly manufacturing by meeting and surpassing energy standards while not sacrificing performance. By using oversized, higher-capacity, balanced refrigeration systems, TRUE outperforms industry efficiency expectations.



8. 100% Run Testing In order to verify that all units are manufactured properly and to spec, TRUE runs tests on every single unit as part of the final quality inspection before releasing the unit into the finished goods inventory.



9. Extensive Availability In its Missouri-based manufacturing facilities, TRUE builds for inventory to provide a near 100% fill rate on standard items. This allows for the most optimal turnaround when the purchase order is received and processed.



7



8



9

TrueFlex® Available Models

*Based on 20 oz. Bottles

6 Bottles Deep*


CVM-11-HC~EGC01
CVM-13-HC~EGC01
GDM-08-HC-TSL01
GDM-10-HC~TSL01
GDM-10PT-HC-TSL01
GDM-10-58-HC~TSL01
GDM-12-HC~TSL01
GDM-15-RTO-HC-LD
GDM-19T-HC~TSL01
GDM-41C-48-HC-LD

7 Bottles Deep*

GDM-14RF-HC-LD
GDM-33-HC-LD
GDM-35-HC~TSL01
GDM-37-HC-LD
GDM-41-HC-LD
GDM-43-HC~TSL01
GDM-45-HC-LD
GDM-47-HC-LD
GDM-49-HC~TSL01
GDM-69-HC-LD
GDM-72-HC~TSL01

8 Bottles Deep*

CVM-27-HC~EGC01
GDM-23-HC~TSL01
GDM-26-HC~TSL01



TrueFlex® Gravity Feed Organizers

TrueFlex PAC® Available Models

TrueFlex PAC

CVM-11-HC~EGC01
CVM-13-HC~EGC01
GDM-06-34-HC-TSL01
GDM-10PT-HC~TSL01
GDM-10-58-HC~TSL01
GDM-10-HC~TSL01
GDM-10SSL-HC-TSL01

GDM-12-HC~TSL01
GDM-33SSL-56-HC-LD
GDM-41SL-48-HC-LD
GDM-41SL-60-HC-LD
TVM-30-HC~VM03
TVM-30SL-HC~VM03
TVM-36SL-HC~VM03
GDM-41SL-54-HC-LD














TrueFlex PAC® Organizers












MODELS












BENEFITS












- Double front bars and high side walls prevent bottles from tipping. Back bar prevents bottles from leaning against the back wall of cooler.
- Single glides offer flexibility to display multiple packages on the same shelf.
- Easy to install. TrueFlex® glides snap on to standard wire shelves, making it possible to retrofit older coolers equipped with flat shelves.
- Includes shelf retainer clips that keep shelves from sliding into door. Eliminates zip ties and service calls.
- Enhanced silicon "slip" agent improves gravity feed performance.
- Optimum air flow ensures rapid pull down to serving temperature.
- Can be ordered with the cooler and shipped inside the unit for one stop shopping..
























Model	Dimensions W x D x H
 CVM-11-HC~EGC01	24 ⁷ / ₈ x 22 ⁷ / ₈ x 53 ⁵ / ₈
 CVM-13-HC~EGC01	24 ⁷ / ₈ x 22 ⁷ / ₈ x 633/4
 CVM-27-HC~EGC01	30 x 291/2 x 781/2
 GDM-06-34-HC~TSL01	20 ¹ / ₂ x 26 ³ / ₈ x 33 ¹ / ₂
 GDM-06-34-HC~TSL01 <small>EXTTOP</small>	20 ³ / ₈ x 26 ³ / ₈ x 34
 GDM-07-HC~FGD01	24 ¹ / ₈ x 24 ⁵ / ₈ x 39 ⁷ / ₈
 GDM-08-HC~TSL01	23 ¹ / ₂ x 23 x 48
 GDM-09-SQ-HC-LD	36 x 22 ³ / ₈ x 39 ³ / ₄
 GDM-10-HC~TSL01	24 ⁷ / ₈ x 22 ⁷ / ₈ x 53 ³ / ₈
 GDM-10PT-HC~TSL01	24 ⁷ / ₈ x 25 ¹ / ₂ x 53 ³ / ₈
 GDM-10SSL-HC~TSL01	24 ⁷ / ₈ x 18 x 53 ¹ / ₂












Model	Dimensions W x D x H
 GDM-10-58-HC~TSL01	24 ⁷ / ₈ x 22 ⁷ / ₈ x 58
 GDM-12-HC~TSL01	24 ⁷ / ₈ x 22 ⁷ / ₈ x 62 ³ / ₈
 GDM-14RF-HC-LD	30 ³ / ₈ x 29 ¹ / ₄ x 58
 GDM-15-RTO-HC-LD	24 ⁷ / ₈ x 24 ⁵ / ₈ x 75
 GDM-19T-HC~TSL01	27 x 24 ⁷ / ₈ x 78 ⁵ / ₈
 GDM-23-HC~TSL01	27 x 29 ⁷ / ₈ x 78 ⁵ / ₈
 GDM-26-HC~TSL01	30 x 29 ⁷ / ₈ x 78 ⁵ / ₈
 GDM-33-HC-LD	39 ¹ / ₂ x 29 ⁷ / ₈ x 78 ⁵ / ₈
 GDM-33C-60-HC-LD	39 ¹ / ₂ x 24 ⁷ / ₈ x 59 ³ / ₄
 GDM-33SSL-56-HC-LD	36 x 18 x 56
 GDM-35-HC~TSL01	39 ¹ / ₂ x 29 ⁷ / ₈ x 78 ⁵ / ₈












Model	Dimensions W x D x H
 GDM-35SL-RF-HC-LD	39¾ x 24¼ x 58⅞
 GDM-37-HC-LD	43½ x 29⅝ x 78%
 GDM-41-HC-LD	47⅞ x 29⅝ x 78⅝
 GDM-41C-48-HC-LD	48 x 24⅞ x 48
 GDM-41CPT-48-HC-LD	48 x 24⅞ x 48
 GDM-41CPT-48-HC-LD	48 x 24⅞ x 48
 GDM-41SL-HC-LD	47⅞ x 24⅞ x 78⅝
 GDM-41SL-48-HC-LD	46⅞ x 21 x 47¾
 GDM-41SL-54-HC-LD	47⅞ x 21 x 54⅞
 GDM-41SL-60-HC-LD	47⅞ x 21 x 59⅞
 GDM-43-HC~TSL01	47⅞ x 29⅞ x 78⅝












Model	Dimensions W x D x H
 GDM-45-HC-LD	51⅞ x 29⅝ x 78%
 GDM-47-HC-LD	54⅞ x 29% x 78⅝
 GDM-49-HC~TSL01	54⅞ x 29% x 78%
 GDM-69-HC-LD	78⅞ x 29⅝ x 78⅝
 GDM-72-HC~TSL01	78⅞ x 29⅞ x 78⅝
 TVM-30-HC~VM03	30% x 23⅞ x 54⅞
 TVM-30SL-HC~VM03	30% x 21⅞ x 54⅞
 TVM-36SL-HC~VM01	36 x 21¼ x 55
 TVM-48-HC~VM01	47¼ x 29⅞ x 78⅝
 TVM-48SL-HC~VM01	47⅞ x 25¼ x 78¾
 TVM-48SL-48-HC~VM01	46% x 21 x 48











Model	Dimensions W x D x H
 TVM-48SL-54-HC~VM01	47 ¹ / ₈ x 21 ³ / ₄ x 53 ⁷ / ₈
 TAC-14GS-HC-LD	30 ¹ / ₄ x 32 ¹ / ₈ x 56 ³ / ₈
 TOAM-30-HC~TSL01	30 x 29 ¹ / ₄ x 80 ⁵ / ₈
 TOAM-30GS-HC~TSL01	30 x 29 ¹ / ₄ x 80 ⁵ / ₈
 TOAM-36/36GS	36 x 29 ⁷ / ₈ x 78 ¹ / ₂
 TOAM-48-HC~TSL01	48 x 29 ⁷ / ₈ x 78 ¹ / ₂
 TOAM-48GS-HC~TSL01	48 x 29 ⁷ / ₈ x 78 ¹ / ₂
 TOAM-72-HC~TSL01	72 x 29 ⁷ / ₈ x 78 ¹ / ₂
 TOAM-72GS-HC~TSL01	72 x 29 ⁷ / ₈ x 78 ¹ / ₂
 T-11G-HC~TSL01	19 ¹ / ₄ x 21 ³ / ₈ x 70 ³ / ₈












Model	Dimensions W x D x H
 CVM-11-HC~EGC01	630 x 581 x 1360
 CVM-13-HC~EGC01	630 x 581 x 1617
 CVM-27-HC~EGC01	762 x 747 x 1993
 GDM-06-34-HC~TSL01	519 x 670 x 850
 GDM-06-34-HC~TSL01 <small>EXTTOP</small>	518 x 670 x 863
 GDM-07-HC~FGD01	613 x 626 x 1013
 GDM-08-HC~TSL01	594 x 583 x 1219
 GDM-09-SQ-HC-LD	914 x 567 x 1008
 GDM-10-HC~TSL01	632 x 581 x 1356
 GDM-10PT-HC~TSL01	630 x 648 x 1356
 GDM-10SSL-HC~TSL01	632 x 458 x 1359












Model	Dimensions W x D x H
 GDM-10-58-HC~TSL01	630 x 581 x 1472
 GDM-12-HC~TSL01	632 x 581 x 1585
 GDM-14RF-HC-LD	772 x 743 x 1474
 GDM-15-RTO-HC-LD	632 x 626 x 1905
 GDM-19T-HC~TSL01	686 x 632 x 1998
 GDM-23-HC~TSL01	686 x 759 x 1998
 GDM-26-HC~TSL01	762 x 759 x 1998
 GDM-33-HC-LD	1004 x 753 x 1998
 GDM-33CPT-54-HC-LD	1004 x 613 x 1375
 GDM-33C-60-HC-LD	1004 x 753 x 1998
 GDM-33SSL-56-HC-LD	915 x 458 x 1423












Model	Dimensions W x D x H
 GDM-35-HC~TSL01	1004 x 759 x 1998
 GDM-35SL-RF-HC-LD	1010 x 616 x 1477
 GDM-37-HC-LD	1105 x 753 x 1998
 GDM-41-HC-LD	1197 x 753 x 1998
 GDM-41C-48-HC-LD	1220 x 613 x 120
 GDM-41CPT-48-HC-LD	1220 x 613 x 120
 GDM-41SL-HC-LD	1197 x 613 x 1998
 GDM-41SL-48-HC-LD	1191 x 534 x 1213
 GDM-41SL-54-HC-LD	1197 x 534 x 1375
 GDM-41SL-60-HC-LD	1197 x 534 x 1521
 GDM-43-HC~TSL01	1197 x 759 x 1998












Model	Dimensions W x D x H
 GDM-45-HC-LD	1299 x 753 x 1998
 GDM-47-HC-LD	1375 x 753 x 1998
 GDM-49-HC~TSL01	1375 x 759 x 1998
 GDM-69-HC-LD	1985 x 753 x 1998
 GDM-72-HC~TSL01	1985 x 759 x 1998
 TVM-30-HC~VM01	783 x 606 x 1394
 TVM-30SL-HC~VM03	783 x 556 x 1394
 TVM-36SL-HC~VM03	915 x 534 x 1397
 TVM-48-HC~VM01	1198 x 757 x 1996
 TVM-48SL-HC~VM01	1197 x 641 x 2000
 TVM-48SL-48-HC~VM01	1190 x 533 x 1217









Model	Dimensions W x D x H
 TVM-48SL-54-HC~VM01	1197 x 550 x 1368
 TAC-14GS-HC-LD	769 x 816 x 1432
 TOAM-30-HC~TSL01	762 x 743 x 2048
 TOAM-30GS-HC~TSL01	762 x 743 x 2048
 TOAM-36/36GS-HC~TSL01	915 x 757 x 1994
 TOAM-48-HC~TSL01	1219 x 757 x 1994
 TOAM-48GS-HC~TSL01	1219 x 757 x 1994
 TOAM-72-HC~TSL01	1829 x 757 x 1994
 TOAM-72GS-HC~TSL01	1829 x 757 x 1994
 T-11G-HC~TSL01	487 x 541 x 1786

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 CVM-11-HC~EGC01	1/5	n/a	2.5	n/a
 CVM-13-HC~EGC01	1/5	n/a	2.5	n/a
 CVM-27-HC~EGC01	1/4	n/a	3.5	n/a
 GDM-06-34-HC~TSL01	1/10	n/a	1.6	n/a
 GDM-06-34-HC~TSL01 _{EXTTOP}	1/10	n/a	1.6	n/a
 GDM-07-HC~FGD01	1/6	1/6	1.9	1.1
 GDM-08-HC~TSL01	1/5	n/a	1.8	n/a
 GDM-09-SQ-HC-LD	1/6	n/a	1.9	n/a
 GDM-10-HC~TSL01	1/5	n/a	1.8	n/a
 GDM-10PT-HC~TSL01	1/5	n/a	2.0	n/a
 GDM-10SSL-HC~TSL01	1/5	n/a	1.8	n/a

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 GDM-10-58-HC~TSL01	1/5	n/a	1.8	n/a
 GDM-12-HC~TSL01	1/5	n/a	1.8	n/a
 GDM-14RF-HC-LD	1/5	n/a	2.0	n/a
 GDM-15-RTO-HC-LD	1/6	1/6	2	n/a
 GDM-19T-HC~TSL01	1/3	1/3	5.4	2.4
 GDM-23-HC~TSL01	1/3	1/3	5.4	2.4
 GDM-26-HC~TSL01	1/3	n/a	5.4	n/a
 GDM-33-HC-LD	1/2	1/2	3.9	4.6
 GDM-33CPT-54-HC-LD	1/5	n/a	2.0	n/a
 GDM-33SSL-56-HC-LD	1/5	n/a	2.0	n/a
 GDM-35-HC~TSL01	1/2	1/2	3.9	4.6

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 GDM-35SL-RF-HC-LD	1/5	n/a	2	n/a
 GDM-37-HC-LD	1/2	n/a	3.9	n/a
 GDM-41-HC-LD	1/2	n/a	3.9	n/a
 GDM-41C-48-HC-LD	1/5	n/a	2	n/a
 GDM-41CPT-48-HC-LD	1/5	n/a	2.0	n/a
 GDM-41SL-HC-LD	1/2	n/a	10.8	n/a
 GDM-41SL-48-HC-LD	1/5	n/a	2.0	n/a
 GDM-41SL-54-HC-LD	1/5	n/a	2.0	n/a
 GDM-41SL-60-HC-LD	1/5	n/a	2.0	n/a
 GDM-43-HC~TSL01	1/2	n/a	3.9	n/a
 GDM-45-HC-LD	1/2	n/a	5.8	n/a

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 GDM-47-HC-LD	1/2	n/a	5.8	n/a
 GDM-49-HC~TSL01	1/2	n/a	5.8	n/a
 GDM-69-HC-LD	1/2	n/a	7.3	n/a
 GDM-72-HC~TSL01	3/4	n/a	8	n/a
 TVM-30SL-HC~VM03	1/5	n/a	2	n/a
 TVM-30SL-HC~VM03	1/5	n/a	2	n/a
 TVM-36SL-HC~VM01	1/5	n/a	2	n/a
 TVM-48-HC~VM01	1/2	n/a	10.5	n/a
 TVM-48SL-HC~VM01	1/2	1/2	10.8	4.9
 TVM-48SL-48-HC~VM01	1/5	n/a	2.0	n/a
 TVM-48SL-54-HC~VM01	1/5	n/a	2	n/a

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 TAC-14GS-HC-LD	¾	n/a	11.2	n/a
 TOAM-30-HC~TSL01	¾	n/a	9.5	n/a
 TOAM-30GS-HC~TSL01	¾	n/a	9.5	n/a
 TOAM-48-HC~TSL01	¾	n/a	7.6	n/a
 TOAM-48GS-HC~TSL01	¾	n/a	7.6	n/a
 TOAM-72-HC~TSL01	¾	n/a	14.9	n/a
 TOAM-72GS-HC~TSL01	¾	n/a	14.9	n/a
 T-11G-HC~TSL01		n/a	1.6	n/a



True Stripe signs are standard on all GDM models.



Plain white, plain black, and stainless steel signs are available upon request on most models.



Alternative signs are shipped from the factory and are available at no charge if indicated at the time the order is placed. If a sign is ordered after the unit leaves the factory, an upcharge will apply.



Custom signs and graphics are available. Please contact the factory for details and pricing.

True stripe graphic available for all models



Upcharges may apply.
Availability of models may vary.

Graphic Signs

COLD BEVERAGES	COLD BEVERAGES	Item# S-BCBV / S-SCBV
COLD JUICE	COLD JUICE	Item# S-BCJ / S-SCJ
COLD WATER	COLD WATER	Item# S-BCW / S-SCW
ENERGY DRINKS	ENERGY DRINK	Item# S-BED / S-SED
SOFT DRINKS	SOFT DRINKS	Item# S-BSD / S-SSD
COLD BEER	COLD BEER	Item# S-BCB / S-SCB
WINE	WINE	Item# S-BW / S-SW
COLD MILK	COLD MILK	Item# S-BCM / S-SCM
MILK & DAIRY	MILK & DAIRY	Item# S-BMD / S-SMD

Fast FACTS

SELF SERVE	SELF SERVE
DELI FOODS	DELI FOODS
SANDWICHES	SANDWICHES
FRESH SALADS	FRESH SALADS
DESSERTS	DESSERTS
FRESH FLOWERS	FRESH FLOWERS
FROZEN FOOD	FROZEN FOOD
ICE CREAM	ICE CREAM

Graphic Signs

Fast FACTS

Item# S-BSS / S-SSS



Item# S-BI / S-SI

Item# S-BDF / S-SDF



Item# S-BNC / S-SNC

Item# S-BS / S-SS



SPARKLING ICE

Item# S-TSI-11

Item# S-BFS / S-SFS



WINE

Item# S-TW-16

Item# S-BD / S-SD



DESSERTS BRONZE

Item# S-TD-15

Item# S-BFRF / S-SFRF



FLOWERS

Item# S-TF-16

Item# S-BNC / S-SNC



TRUE STRIPE

Item# S-TS-02

Item# S-BFZF / S-SFZF

Item# S-BIC / S-SIC



Black



White



Stainless Steel

Powder Coating Contact factory for additional available RAL colors.

Matte White	9001	1013	1001	7035	7001	7023	7024	8001	8007	3011	9016
6018	6013	6010	6001	1028	2009	3020	5024	5010	5009	Gloss Black	Ultra Matte Black

MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	24 $\frac{7}{8}$ x 22 $\frac{7}{8}$ x 53 $\frac{5}{8}$ inches 630 x 581 x 1360 mm
Shelf Size (WxD)	20 $\frac{7}{8}$ x 17 $\frac{1}{2}$ inches 524 x 445 mm
Capacity (20 oz.)	Standard Shelving: 4 Flat Shelves - 189 <i>TrueFlex</i> (4) - 165
Trailer Loads	40' Container - 48, 53' Trailer Load - 63
Crated Weight (Lbs.)	210
Horsepower	$\frac{1}{6}$
Amps	2.5
Daily Kwh Usage	1.7
[†] Depth does not include 1" (26 mm) for rear bumper.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	24 $\frac{7}{8}$ x 22 $\frac{7}{8}$ x 63 $\frac{3}{4}$ inches 630 x 581 x 1617 mm
Shelf Size (WxD)	20 $\frac{7}{8}$ x 17 $\frac{1}{2}$ inches 524 x 445 mm
Capacity (20 oz.)	Standard Shelving: 5 Flat Shelves - 231 <i>TrueFlex</i> (5) - 201
Trailer Loads	40' Container - 48, 53' Trailer Load - 63
Crated Weight (Lbs.)	235
Horsepower	$\frac{1}{8}$
Amps	2.5
Daily Kwh Usage	1.9
[†] Depth does not include 1" (26 mm) for rear bumper.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	30 x 29 1/2 x 78 1/2 inches 762 x 747 x 1993 mm
Shelf Size (WxD)	25 11/16 x 23 1/4 inches 652 x 641 mm
Capacity (20 oz.)	Standard Shelving: 6 Flat Shelves - 414 <i>TrueFlex</i> (6) - 368
Trailer Loads	40' Container - 28, 53' Trailer Load - 38
Crated Weight (Lbs.)	340
Horsepower	1/4
Amps	3.4
Daily Kwh Usage	2.3
†Depth does not include 1 5/8" (16 mm) for rear mechanical components.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	20½ x 26¾ x 33½ inches 519 x 670 x 850 mm
Shelf Size (WxD)	17⅛ x 17½ inches 435 x 445 mm
Capacity (20 oz.)	Standard Shelving: 3 Flat Shelves - 96
Trailer Loads	40' Container - 78, 53' Trailer Load - 136
Crated Weight (Lbs.)	175
Horsepower	1/10
Amps	1.6
Daily Kwh Usage	0.86
[†] Depth does not include 1⅝" (42 mm) for swing door handle. [†] Depth does not include ¼" (6 mm) for system mechanical components.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	20 ³ / ₈ x 26 ³ / ₈ x 34 inches 518 x 670 x 863 mm
Shelf Size (WxD)	17 ¹ / ₈ x 17 ¹ / ₂ inches 435 x 445 mm
Capacity (20 oz.)	Standard Shelving: 3 Flat Shelves - 94
Trailer Loads	40' Container - 78, 53' Trailer Load - 136
Crated Weight (Lbs.)	175
Horsepower	1/10
Amps	1.6
Daily Kwh Usage	0.86
[†] Depth does not include 1 ⁵ / ₈ " (42 mm) for swing door handle. [†] Depth does not include 1/4" (6 mm) for system mechanical components.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	24 ¹ / ₈ x 24 ⁵ / ₈ x 39 ⁷ / ₈ inches 613 x 626 x 1013 mm
Shelf Size (WxD)	2 Top = 19 ³ / ₄ x 18 inches 1 Bottom = 19 ³ / ₄ x 16 ¹ / ₂ inches 2 Top = 502 x 458 mm 1 Bottom = 502 x 420 mm
Capacity (20 oz.)	Standard Shelving: 2 ¹ / ₂ Flat Shelves - 100
Trailer Loads	40' Container - 84, 53' Trailer Load - 120
Crated Weight (Lbs.)	180
Horsepower	¹ / ₆
Amps	1.9
Daily Kwh Usage	1.04
[†] Depth does not include 1 ⁵ / ₈ " (42 mm) for swing door handle. [†] Depth does not include 1/2" (13 mm) for system mechanical components.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	23½ x 23 x 48 inches 594 x 583 x 1219 mm
Shelf Size (WxD)	19⅛ x 17½ inches 486 x 445 mm
Capacity (20 oz.)	Standard Shelving: 3 Flat Shelves - 108 <i>TrueFlex</i> ® - 90
Trailer Loads	40' Container - 51, 53' Trailer Load - 66
Crated Weight (Lbs.)	180
Horsepower	1/5
Amps	1.8
Daily Kwh Usage	1.05
[†] Depth does not include 1⅝" (42 mm) for swing door handle. [†] Depth does not include 1" (26 mm) for rear bumper.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	36 x 22 ³ / ₈ x 39 ³ / ₄ inches 914 x 567 x 1008 mm
Shelf Size (WxD)	2 Top = 31 ³ / ₄ x 15 1 Bottom = 31 ³ / ₄ x 8 ¹ / ₂ inches 2 Top = 807 x 381 1 Bottom = 807 x 210 mm
Capacity (20 oz.)	Standard Shelving: 3 Flat Shelves - 130
Trailer Loads	40' Container - 66, 53' Trailer Load - 120
Crated Weight (Lbs.)	230
Horsepower	1/6
Amps	1.9
Daily Kwh Usage	1.43
[†] Depth does not include 7/8" (21 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	24 ⁷ / ₈ x 22 ⁷ / ₈ x 53 ³ / ₈ inches 632 x 581 x 1356 mm
Shelf Size (WxD)	205 ⁸ / ₈ x 17 ¹ / ₂ inches 524 x 445 mm
Capacity (20 oz.)	Standard Shelving: 3 Shelves - 168 <i>TrueFlex</i> (3) - 144
Trailer Loads	40' Container - 48, 53' Trailer Load - 63
Crated Weight (Lbs.)	200
Horsepower	1/5
Amps	1.8
Daily Kwh Usage	1.18
[†] Depth does not include 1 ⁵ / ₈ " (42 mm) for door handle. [†] Depth does not include ⁵ / ₈ " (16 mm) for rear mechanical components.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	24 ⁷ / ₈ x 25 ¹ / ₂ x 53 ³ / ₈ inches 630 x 648 x 1356 mm
Shelf Size (WxD)	20 ⁵ / ₈ x 17 ¹ / ₂ inches 524 x 445 mm
Capacity (20 oz.)	Standard Shelving: 3 Flat Shelves - 126 <i>Trueflex</i> ™ -108
Trailer Loads	40' Container - 45, 53' Trailer Load - 60
Crated Weight (Lbs.)	225
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	1.87
[†] Depth does not include 1 ¹ / ₂ " (42 mm) each side for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	24 ⁷ / ₈ x 18 x 53 ¹ / ₂ inches 632 x 458 x 1359 mm
Shelf Size (WxD)	20 ⁵ / ₈ x 12 inches 524 x 318 mm
Capacity (20 oz.)	Standard Shelving: 3 White Wire - 112
Trailer Loads	40' Container - 57, 53' Trailer Load - 75
Crated Weight (Lbs.)	180
Horsepower	1/5
Amps	1.8
Daily Kwh Usage	1.41
[†] Depth does not include 1 ¹ / ₈ " (42 mm) for door handle. [†] Depth does not include 5 ¹ / ₈ " (16 mm) for rear mechanical components.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	24 ⁷ / ₈ x 22 ⁷ / ₈ x 58 inches 630 x 581 x 1472 mm
Shelf Size (WxD)	20 ⁵ / ₈ x 17 ¹ / ₂ inches 524 x 445 mm
Capacity (20 oz.)	Shelving Options: 4 Flat Shelves - 168 <i>Trueflex</i> . (4) - 144
Trailer Loads	40' Container - 48, 53' Trailer Load - 63
Crated Weight (Lbs.)	210
Horsepower	1/5
Amps	1.8
Daily Kwh Usage	1.38
[†] Depth does not include 1 ³ / ₈ " (35 mm) for door handle. [†] Depth does not include ⁵ / ₈ " (16 mm) for rear mechanical components.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH [*])	19¼ x 21¾ x 70¾ inches 487 x 541 x 1786 mm
Shelf Size (WxD)	14¾ x 15½ inches 375 x 394 mm
Shelf Type	Standard Shelving: 3 Wire Shelves - 125
Trailer Loads	40' Container - 51, 53' Trailer Load - 66
Crated Weight (Lbs.)	210
Horsepower	1/10
Amps	1.6
Daily Kwh Usage	1.1

[†]Depth does not include 1½" (42 mm) for door handle.

[†]Depth does not include 1" (26 mm) for rear bumper.

^{*}Height does not include ½" (13 mm) for castors.



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	24 ⁷ / ₈ x 22 ⁷ / ₈ x 62 ³ / ₈ inches 632 x 581 x 1585 mm
Shelf Size (WxD)	20 ⁵ / ₈ x 17 ¹ / ₂ inches 524 x 445 mm
Capacity (20 oz.)	Shelving Options: 4 Flat Shelves - 168 <i>TRUEFLEX</i> (4) - 144
Trailer Loads	40' Container - 48, 53' Trailer Load - 63
Crated Weight (Lbs.)	200
Horsepower	1/5
Amps	1.8
Daily Kwh Usage	1.28

[†]Depth does not include 1⁵/₈" (42 mm) for door handle.

[†]Depth does not include ⁵/₈" (16 mm) for rear mechanical components.



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH [*])	30 ³ / ₈ x 29 ¹ / ₄ x 58 inches 772 x 743 x 1474 mm
Shelf Size (WxD)	25 ³ / ₄ x 20 ¹ / ₂ inches 655 x 521 mm
Capacity (20 oz.)	Standard Shelving: <i>TrueFlex</i> ® (4) - 196 Shelving Options: 4 Flat Shelves - 224
Trailer Loads	40' Container - 26, 53' Trailer Load - 54
Crated Weight (Lbs.)	280
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	1.18
[†] Depth does not include 2" (51 mm) for door handles. [*] Height does not include 5/8" (16 mm) for appliance rollers.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	24 ⁷ / ₈ x 24 ⁵ / ₈ x 75 inches 632 x 626 x 1905 mm
Shelf Size (WxD)	20 ⁵ / ₈ x 17 ¹ / ₂ inches 524 x 445 mm
Capacity (20 oz.)	Standard Shelving: 5 Flat Shelves - 210 <i>TrueFlex</i> . (5) - 180
Trailer Loads	40' Container - 39, 53' Trailer Load - 54
Crated Weight (Lbs.)	250
Horsepower	1/6
Amps	2
Daily Kwh Usage	1.78
[†] Depth does not include 1 ¹ / ₂ " (39 mm) for door handle.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	27 x 24 ⁷ / ₈ x 78 ⁵ / ₈ inches 686 x 632 x 1998 mm
Shelf Size (WxD)	22 ⁹ / ₁₆ x 18 ¹ / ₄ inches 575 x 464 mm
Capacity (20 oz.)	Shelving Options: 5 Flat Shelves - 210 <i>TrueFlex</i> . (5) - 210
Trailer Loads	40' Container - 42, 53 Trailer Load - 57
Crated Weight (Lbs.)	275
Horsepower	1/3
Amps	5.4
Daily Kwh Usage	1.91
[†] Depth does not include 1 ¹ / ₂ " (42 mm) for door handle.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	27 x 29 ⁷ / ₈ x 78 ⁵ / ₈ inches 686 x 759 x 1998 mm
Shelf Size (WxD)	22 ⁵ / ₈ x 23 ¹ / ₄ inches 575 x 591 mm
Capacity (20 oz.)	Shelving Options: 5 Flat Shelves - 320 <i>TrueFlex</i> (5) - 280
Trailer Loads	40' Container - 39, 53' Trailer Load - 51
Crated Weight (Lbs.)	305
Horsepower	1/3
Amps	5.4
Daily Kwh Usage	1.95
†Depth does not include 1 ¹ / ₂ " (42 mm) for door handle.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	30 x 29 ⁷ / ₈ x 78 ⁵ / ₈ inches 762 x 759 x 1998 mm
Shelf Size (WxD)	25 ³ / ₄ x 23 ¹ / ₄ inches 655 x 591 mm
Capacity (20 oz.)	Standard Shelving: 5 Flat Shelves - 320 <i>TrueFlex</i> . (5) - 320
Trailer Loads	40' Container - 26, 53' Trailer Load - 51
Crated Weight (Lbs.)	320
Horsepower	1/3
Amps	5.4
Daily Kwh Usage	1.92
[†] Depth does not include 1 ¹ / ₂ " (42 mm) for door handle.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	39½ x 24⅛ x 59¾ inches 1004 x 753 x 1998 mm
Shelf Size (WxD)	17⅞ x 34⅜ inches 439 x 537 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (3) - 198 Shelving Options: 3 Flat Shelves - 198 <i>truetrac</i> (4) - 264
Trailer Loads	40' Container- 33 units, 53' Container- 43 units
Crated Weight (Lbs.)	390
Horsepower	⅓
Amps	2.1
Daily Kwh Usage	1.95

†Depth does not include ⅞" (23 mm) each side for door handles.



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	39½ x 24⅞ x 54⅞ inches 1004 x 613 x 1375 mm
Shelf Size (WxD)	34⅜ x 17⅞ inches 874 x 455 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (3) - 198 Shelving Options: 3 Flat Shelves - 198
Trailer Loads	40' Container - 34, 53' Trailer Load - 44
Crated Weight (Lbs.)	360
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	2.03
†Depth does not include ⅞" (23 mm) each side for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	39½ x 29 ⁵ / ₈ x 78 ⁵ / ₈ inches 1004 x 753 x 1998 mm
Shelf Size (WxD)	17¼ x 21 ¹ / ₈ inches 439 x 537 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 420 <i>TrueFlex</i> ® (10) - 350
Trailer Loads	40' Container - 28, 53' Trailer Load - 38
Crated Weight (Lbs.)	360
Horsepower	½
Amps	3.9
Daily Kwh Usage	3.69
[†] Depth does not include ¾" (10 mm) for slide door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	36 x 18 x 56 inches 915 x 458 x 1423 mm
Shelf Size (WxD)	31 3/4 x 11 3/4 inches 807 x 299 mm
Capacity (20 oz.)	Standard Shelving: 4 Flat Shelves - 200
Trailer Loads	40' Container - 46, 53' Trailer Load - 62
Crated Weight (Lbs.)	240
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	1.74
[†] Depth does not include 7/8" (23 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	39½ x 297⁄8 x 78⁵⁄8 inches 1004 x 759 x 1998 mm
Shelf Size (WxD)	17¼ x 21¹⁄8 inches 439 x 537 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 420 <i>Trueflex</i> ® (10) - 350
Trailer Loads	40' Container - 26, 53' Trailer Load - 34
Crated Weight (Lbs.)	375
Horsepower	½
Amps	3.9
Daily Kwh Usage	3.3
†Depth does not include 1½" (42 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	39¾ x 24¼ x 58 ⁵ / ₈ inches 1010 x 616 x 1477 mm
Shelf Size (WxD)	35¼ x 15¼ inches 896 x 388 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (4) - 220 Shelving Options: 4 Flat Shelves - 240
Trailer Loads	40' Container - 34, 53' Trailer Load - 44
Crated Weight (Lbs.)	275
Horsepower	1/5
Amps	2
Daily Kwh Usage	1.72



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	43½ x 29 ⁵ / ₈ x 78 ⁵ / ₈ inches 1105 x 753 x 1998 mm
Shelf Size (WxD)	19 x 20 ⁵ / ₈ inches 438 x 524 mm
Capacity (20 oz.)	Standard Options: 10 Flat Shelves - 420 <i>Trueflex</i> . (10) - 300
Trailer Loads	40' Container - 24, 53' Trailer Load - 38
Crated Weight (Lbs.)	400
Horsepower	½
Amps	3.9
Daily Kwh Usage	3.79
[†] Depth does not include ¾" (10 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	47 ¹ / ₈ x 29 ⁵ / ₈ x 78 ⁵ / ₈ inches 1197 x 753 x 1998 mm
Shelf Size (WxD)	20 ⁷ / ₈ x 20 ⁵ / ₈ inches 531 x 524 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 490 <i>Trueflex</i> ® (10) - 420
Trailer Loads	40' Container - 23, 53' Trailer Load - 31
Crated Weight (Lbs.)	415
Horsepower	½
Amps	3.9
Daily Kwh Usage	3.91
†Depth does not include ¾" (10 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	48 x 24 ¹ / ₈ x 48 inches 1220 x 613 x 1220 mm
Shelf Size (WxD)	21 ¹ / ₂ x 17 ¹ / ₂ inches 547 x 445 mm
Capacity (20 oz.)	Standard Shelving: <i>Trueflex</i> ® (6) - 216 Shelving Options - (6) Wire Shelves - 252
Trailer Loads	40' Container - 27, 53' Trailer Load - 36
Crated Weight (Lbs.)	325
Horsepower	1/5
Amps	2
Daily Kwh Usage	1.57
[†] Depth does not include 7/8" (23 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	48 x 24 ¹ / ₈ x 48 inches 1220 x 613 x 1220 mm
Shelf Size (WxD)	20 ⁵ / ₈ x 16 ¹³ / ₃₂ inches 524 x 417 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (6) - 180 Shelving Options: (6) Wire Shelves - 210
Trailer Loads	40' Container - 27, 53' Trailer Load - 36
Crated Weight (Lbs.)	394
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	2.21
†Depth does not include 7/8" (23 mm) each side for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	47 ¹ / ₈ x 24 ¹ / ₈ x 78 ⁵ / ₈ inches 1197 x 613 x 1998 mm
Shelf Size (WxD)	20 ⁷ / ₈ x 16 ¹ / ₄ inches 531 x 413 mm
Capacity (20 oz.)	Standard Shelving: <i>TrueTrac</i> (10) - 300 Shelving Options: 10 Flat Shelves - 350
Trailer Loads	40' Container - 27, 53' Trailer Load - 37
Crated Weight (Lbs.)	410
Horsepower	½
Amps	10.8
Daily Kwh Usage	3.42
†Depth does not include 7/8" (23 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	46 ⁷ / ₈ x 21 x 47 ³ / ₄ inches 1191 x 534 x 1213 mm
Shelf Size (WxD)	21 ¹ / ₂ x 14 ³ / ₄ inches 547 x 375 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (6) - 180 Shelving Options: 6 Flat Shelves - 210
Trailer Loads	40' Container - 28, 53' Trailer Load - 48
Crated Weight (Lbs.)	295
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	1.62
[†] Depth does not include 7/8" (23 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	47 ¹ / ₈ x 21 x 54 ¹ / ₈ inches 1197 x 534 x 1375 mm
Shelf Size (WxD)	20 ⁷ / ₈ x 14 ³ / ₄ inches 531 x 375 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (6) - 180 Shelving Options: 6 Flat Shelves - 210
Trailer Loads	40' Container - 28, 53' Trailer Load - 49
Crated Weight (Lbs.)	295
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	1.74
†Depth does not include 7/8" (23 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	47 ¹ / ₈ x 21 x 59 ⁷ / ₈ inches 1197 x 534 x 1521 mm
Shelf Size (WxD)	20 ⁷ / ₈ x 14 ³ / ₄ inches 531 x 375 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (6) - 180 Shelving Options: 6 Flat Shelves - 180
Trailer Loads	40' Container - 28, 53' Trailer Load - 49
Crated Weight (Lbs.)	345
Horsepower	1/5
Amps	2
Daily Kwh Usage	1.85
†Depth does not include 7/8" (23 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	47 ¹ / ₈ x 29 ⁷ / ₈ x 78 ⁵ / ₈ inches 1197 x 759 x 1998 mm
Shelf Size (WxD)	20 ⁷ / ₈ x 22 ¹ / ₈ inches 531 x 562 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 490 <i>TrueFlex</i> ™ (10) - 420
Trailer Loads	40' Container - 22, 53' Trailer Load - 29
Crated Weight (Lbs.)	420
Horsepower	½
Amps	3.9
Daily Kwh Usage	3.69
†Depth does not include 1½" (42 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	51 ¹ / ₈ x 29 ⁵ / ₈ x 78 ⁵ / ₈ inches 1299 x 753 x 1998 mm
Shelf Size (WxD)	23 x 20 ⁵ / ₈ inches 585 x 524 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 560 <i>Trueflex</i> ® (10) - 490
Trailer Loads	40' Container - 22, 53' Trailer Load - 30
Crated Weight (Lbs.)	430
Horsepower	½
Amps	5.8
Daily Kwh Usage	3.88
[†] Depth does not include ¾" (10 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	54 ¹ / ₈ x 29 ⁵ / ₈ x 78 ⁵ / ₈ inches 1375 x 753 x 1998 mm
Shelf Size (WxD)	24 ¹ / ₂ x 20 ⁵ / ₈ inches 623 x 524 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 560 <i>TRUEFLEX</i> ® (10) - 490
Trailer Loads	40' Container - 22, 53' Trailer Load - 30
Crated Weight (Lbs.)	445
Horsepower	½
Amps	5.8
Daily Kwh Usage	4.44
[†] Depth does not include ¾" (10 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	54 ¹ / ₈ x 29 ⁷ / ₈ x 78 ⁵ / ₈ inches 1375 x 759 x 1998 mm
Shelf Size (WxD)	24 ⁵ / ₈ x 22 ¹ / ₂ inches 626 x 572 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 560 <i>Trueflex</i> ® (10) - 490
Trailer Loads	40' Container - 16, 53' Trailer Load - 28
Crated Weight (Lbs.)	455
Horsepower	½
Amps	5.8
Daily Kwh Usage	3.6
†Depth does not include 1½" (42 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	78 ¹ / ₈ x 29 ⁵ / ₈ x 78 ⁵ / ₈ inches 1985 x 753 x 1998 mm
Shelf Size (WxD)	23 ⁷ / ₈ x 20 ⁵ / ₈ inches 607 x 524 mm
Capacity (20 oz.)	Standard Shelving: 15 Flat Shelves - 840 <i>TRUEFLEX</i> ® (15) - 735
Trailer Loads	40' Container - 14, 53' Trailer Load - 19
Crated Weight (Lbs.)	625
Horsepower	½
Amps	7.3
Daily Kwh Usage	6.27
[†] Depth does not include ¾" (10 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD [†] xH)	78 ¹ / ₈ x 29 ⁷ / ₈ x 78 ⁵ / ₈ inches 1985 x 759 x 1998 mm
Shelf Size (WxD)	24 ¹ / ₄ x 22 ¹ / ₈ inches 616 x 562 mm
Capacity (20 oz.)	Standard Shelving: 15 Flat Shelves - 840 <i>TRUEFLEX</i> ® (15) - 735
Trailer Loads	40' Container - 13, 53' Trailer Load - 17
Crated Weight (Lbs.)	620
Horsepower	³ / ₄
Amps	8
Daily Kwh Usage	4.9
[†] Depth does not include 1 ¹ / ₂ " (42 mm) for door handles.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	30 ⁷ / ₈ x 23 ⁷ / ₈ x 54 ⁷ / ₈ inches 783 x 606 x 1394 mm
Shelf Size (WxD)	26 ⁹ / ₁₆ x 17 ¹ / ₂ inches 675 x 445 mm
Capacity (20 oz.)	Standard Shelving: 4 TrueFlex Pac - 216
Trailer Loads	40' Container - 39, 53' Trailer Load - 51
Crated Weight (Lbs.)	250
Horsepower	1/5
Amps	2
Daily Kwh Usage	1.64
†Depth does not include 1½" (38 mm) for door handles. †Depth does not include 1" (26 mm) for rear bumpers.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	30 ⁷ / ₈ x 21 ⁷ / ₈ x 54 ⁷ / ₈ inches 783 x 556 x 1394 mm
Shelf Size (WxD)	26 ⁵ / ₁₆ x 14 ³ / ₄ inches 675 x 445 mm
Capacity (20 oz.)	Standard Shelving: 4 TrueFlex Pac - 180
Trailer Loads	40' Container - 39, 53' Trailer Load - 51
Crated Weight (Lbs.)	240
Horsepower	1/5
Amps	2
Daily Kwh Usage	1.64
†Depth does not include 1½" (38 mm) for door handles. †Depth does not include 1" (26 mm) for rear bumpers.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	36 x 21¼ x 55 inches 915 x 537 x 1397 mm
Shelf Size (WxD)	31¾ x 14¾ inches 807 x 375 mm
Capacity (20 oz.)	Standard Shelving: 4 TrueFlex Pac - 200
Trailer Loads	40' Container - 33, 53' Trailer Load - 44
Crated Weight (Lbs.)	270
Horsepower	1/5
Amps	2
Daily Kwh Usage	1.76
†Depth does not include 1½" (38 mm) for door handles.	
†Depth does not include 1" (26 mm) for rear bumpers.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	47 ¹ / ₈ x 25 ¹ / ₄ x 78 ³ / ₄ inches 1197 x 641 x 2000 mm
Shelf Size (WxD)	21 ⁷ / ₃₂ x 14 inches 539 x 356 mm
Shelf Type	Standard Shelving: 8 Cantilever Shelves - 280
Trailer Loads	40' Container - 22, 53' Trailer Load - 29
Crated Weight (Lbs.)	610
Horsepower	½
Amps	10.8
Daily Kwh Usage	3.76
†Depth does not include 1½" (38 mm) for door handles.	
†Depth does not include 1" (26 mm) for rear bumpers.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	47¼ x 297⁄8 x 78⁵⁄8 inches 1198 x 757 x 1996 mm
Shelf Size (WxD)	217⁄32 x 19½ inches 539 x 496 mm
Shelf Type	Standard Shelving: 8 Cantilever Shelves - 375
Trailer Loads	40' Container - 16, 53' Trailer Load - 28
Crated Weight (Lbs.)	520
Horsepower	½
Amps	10.5
Daily Kwh Usage	3.77
†Depth does not include 1¾" (45 mm) for door handles. †Depth does not include ⅝" (14 mm) for rear mechanical components.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD[†]xH)	46 ⁷ / ₈ x 21 x 48 inches 1190 x 533 x 1217 mm
Shelf Size (WxD)	21 ⁵ / ₁₆ x 12 ¹ / ₈ inches 542 x 308 mm
Shelf Type	Standard Shelving: 6 Wire Shelves - 210
Trailer Loads	40' Container - 24, 53' Trailer Load - 33
Crated Weight (Lbs.)	315
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	1.38

[†]Depth does not include 2" (51 mm) for door handles.

[†]Depth does not include 5/8" (14 mm) for rear mechanical components.



MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	47 ¹ / ₈ x 21 ³ / ₄ x 53 ⁷ / ₈ inches 1197 x 550 x 1368 mm
Shelf Size (WxD)	21 ⁵ / ₁₆ x 12 ¹ / ₈ inches 542 x 308 mm
Shelf Type	Standard Shelving: 6 Cantilever Shelves - 168
Trailer Loads	40' Container - 24, 53' Trailer Load - 33
Crated Weight (Lbs.)	380
Horsepower	1/5
Amps	2
Daily Kwh Usage	2.04

†Depth does not include 2" (51 mm) for door handles.

†Depth does not include 1/8" (4 mm) for rear mechanical components.



MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	30 $\frac{1}{4}$ x 32 $\frac{1}{8}$ x 56 $\frac{3}{8}$ inches 769 x 816 x 1432 mm
Shelf Size (WxD)	25 $\frac{11}{16}$ x 17 $\frac{1}{2}$ inches 653 x 445 mm
Capacity (20 oz.)	Standard Shelving: 3 Wire Shelves - 153 Shelving Options: <i>TrueFlex</i> . (3) - 144
Trailer Loads	40' Container - 26, 53' Trailer Load - 34
Crated Weight (Lbs.)	280
Horsepower	$\frac{3}{4}$
Amps	7.0
Daily Kwh Usage	10.03



MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	30 x 29 $\frac{1}{4}$ x 80 $\frac{5}{8}$ inches 762 x 743 x 2048 mm
Shelf Size (WxD)	25 $\frac{13}{16}$ x 15 $\frac{15}{32}$ inches 656 x 393 mm
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 234
Trailer Loads	40' Container - 26, 53' Trailer Load - 31
Crated Weight (Lbs.)	365
Horsepower	$\frac{3}{4}$
Amps	9.5
Daily Kwh Usage	13.86
*No sign version available.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	30 x 29 $\frac{1}{4}$ x 80 $\frac{5}{8}$ inches 762 x 743 x 2048 mm
Shelf Size (WxD)	25 $\frac{13}{16}$ x 15 $\frac{15}{32}$ inches 656 x 393 mm
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 234
Trailer Loads	40' Container - 26, 53' Trailer Load - 31
Crated Weight (Lbs.)	390
Horsepower	$\frac{3}{4}$
Amps	9.5
Daily Kwh Usage	18.33
*No sign version available.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	36 x 29 ⁷ / ₈ x 78 ¹ / ₂ inches
Shelf Size (WxD)	36 x 15 ¹⁷ / ₃₂ inches
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 286
Trailer Loads	40' container - 22 units 53' container - 30 units
Crated Weight (Lbs.)	400
Horsepower	³ / ₄
Amps	10.2
Daily Kwh Usage	17.35
*No sign version available.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	36 x 29 ⁷ / ₈ x 78 ¹ / ₂ inches
Shelf Size (WxD)	36 x 15 ¹⁷ / ₃₂ inches
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 286
Trailer Loads	40' container - 22 units 53' container - 30 units
Crated Weight (Lbs.)	410
Horsepower	³ / ₄
Amps	10.2
Daily Kwh Usage	17.35
*No sign version available.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	48 x 29 ⁷ / ₈ x 78 ¹ / ₂ inches 1219 x 757 x 1994 mm
Shelf Size (WxD)	43 ¹³ / ₁₆ x 15 ¹⁵ / ₃₂ inches 1100 x 393 mm
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 375
Trailer Loads	40' Container - 22, 53' Trailer Load - 29
Crated Weight (Lbs.)	530
Horsepower	³ / ₄
Amps	7.6
Daily Kwh Usage	25.91
*No sign version available.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	48 x 29 ⁷ / ₈ x 78 ¹ / ₂ inches 1219 x 757 x 1994 mm
Shelf Size (WxD)	43 ¹³ / ₁₆ x 15 ¹⁵ / ₃₂ inches 1100 x 393 mm
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 375
Trailer Loads	40' Container - 22, 53' Trailer Load - 29
Crated Weight (Lbs.)	545
Horsepower	³ / ₄
Amps	7.6
Daily Kwh Usage	26.65
*No sign version available.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	72 x 29 ⁷ / ₈ x 78 ¹ / ₂ inches 1829 x 757 x 1994 mm
Shelf Size (WxD)	33 ¹¹ / ₁₆ x 15 ⁷ / ₁₆ inches 1100 x 393 mm
Capacity (20 oz.)	Standard Shelving: 8 Cantilever Shelves - 578
Trailer Loads	40' Container - 13, 53' Trailer Load - 17
Crated Weight (Lbs.)	760
Horsepower	³ / ₄
Amps	14.9
Daily Kwh Usage	33.38
*No sign version available.	



MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	72 x 29 ⁷ / ₈ x 78 ¹ / ₂ inches 1829 x 757 x 1994 mm
Shelf Size (WxD)	33 ¹¹ / ₁₆ x 15 ⁷ / ₁₆ inches 1100 x 393 mm
Capacity (20 oz.)	Standard Shelving: 8 Cantilever Shelves - 578
Trailer Loads	40' Container - 13, 53' Trailer Load - 17
Crated Weight (Lbs.)	765
Horsepower	¾
Amps	14.9
Daily Kwh Usage	34.54
*No sign version available.	





True®
REFRIGERATION



truemfg.com

2001 East Terra Lane
O'Fallon, MO 63366-4434
USA

t 636.240.2400

tf 888.818.8783

f 636.980.3541

Parts 800.424.8783

Parts fax 636.272.9471

e truesales@truemfg.com

Warranty +1 855 878 9277

Warranty fax +1 636 980 8510

Warranty email

warrantyinquiries@truemfg.com

Technical +1 855 372 1368

Technical email

service@truemfg.com

