

REACH-IN REFRIGERATION




T-SERIES
BOTTOM MOUNT

REACH-IN REFRIGERATION



With highly customizable interior and exterior options, Spec Series® are designed to meet the demands of the institutional and consultant market places such as high volume kitchens, schools and hotels.

SPEC SERIES NOMENCLATURE

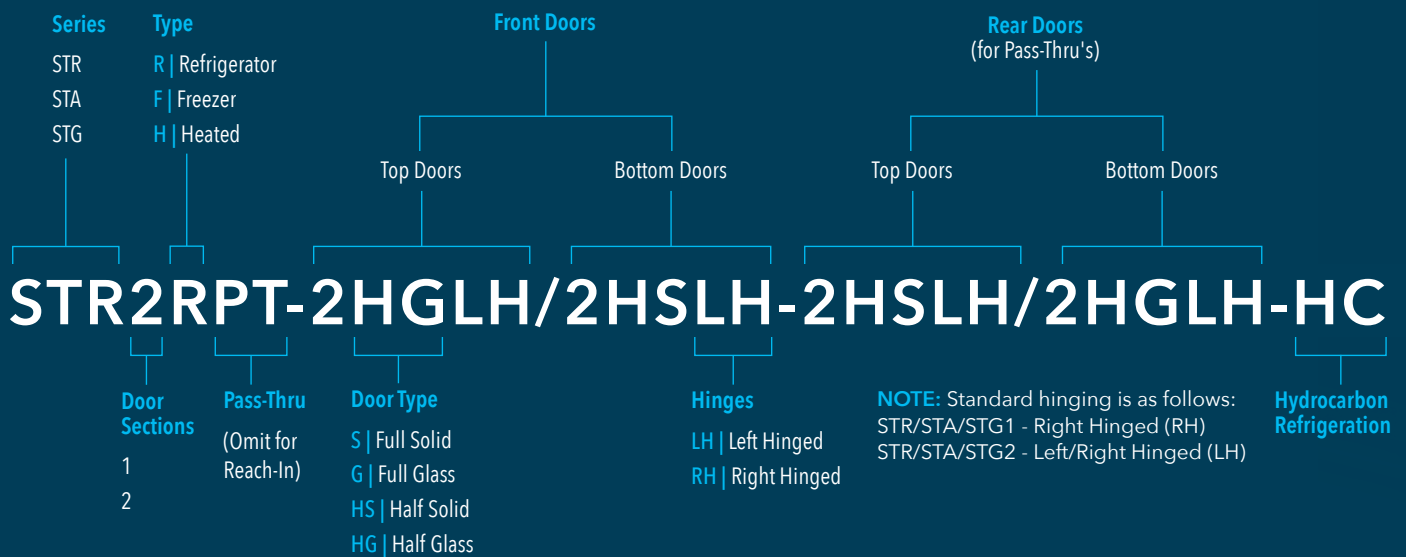



True

36

10

SPEC SERIES

TOP MOUNT

MONO

POPOTES

US

Bottom Mount Reach-Ins | T-Series Refrigerators

REACH-IN & PASS-THRU REFRIGERATORS

Solid & Glass, Full & Half Door

Door locks standard

Entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP)

Lifetime guaranteed door handles

Digital control for state-of-the-art temperature precision. Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation. Refrigerators hold 33° to 38°F

natural refrigerant.

Bottom mount compressor unit performs better in kitchens with higher ambient temperatures and high grease areas

T-49-HC



T-23PT-HC



T-19G-HC-FGD01



T-49-4-HC



T-72-HC

Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Exterior - Stainless steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum with stainless steel floor.
- Positive seal self-closing doors with factory tested (over 1,000,000 times) lifetime guaranteed door hinges and torsion type closure system.
- Energy efficient, "Low-E", thermal insulated glass doors.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- 4" (102mm) diameter castors standard (leg levelers standard for T-12-HC & T-12GHC~FGD01; 2.5" (64mm) diameter castors standard equipment for T-19-HC & T-19GHC~FGD01).
- Door locks standard (available on T-12-HC & T-12G-HC~FGD01).
- Exterior digital temperature display (not available on T-12-HC & T-12G-HC~FGD01).
- Legs available for most models.
- LED interior lighting. Safety shielded.
- Lifetime guaranteed recessed door handles on solid door models.
- Alternative hinge orientation available on most T-23/49/72 models. Contact factory for specifics.

TRADITIONAL REACH-IN REFRIGERATOR

truemfg.com



T-SERIES TRADITIONAL REACH-IN REFRIGERATORS

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID DOORS							
T-11-HC	1	3	1/10	1.6	190 (87)	19 1/4 x 21 1/4 x 70 3/8	487 x 539 x 1786
T-12-HC	1	3	1/6	2.5	185 (84)	24 7/8 x 23 3/8 x 63 3/8	632 x 588 x 1604
T-19-HC	1	3	1/10	1.5	245 (112)	27 x 24 1/2 x 75 1/4	686 x 623 x 1912
T-23-HC	1	3	1/4	2.2	270 (123)	27 x 29 1/2 x 78 3/8	686 x 750 x 1991
T-35-HC	2	6	1/3	5.6	365 (166)	39 1/2 x 29 1/2 x 78 3/8	1004 x 750 x 1991
T-43-HC	2	6	1/2	5.4	370 (168)	47 x 29 1/2 x 78 3/8	1194 x 750 x 1991
T-49-HC	2	6	1/2	5.4	450 (205)	54 1/8 x 29 1/2 x 78 3/8	1375 x 750 x 1991
T-72-HC	3	9	3/4	6.9	575 (261)	78 1/8 x 29 1/2 x 78 3/8	1985 x 750 x 1991
GLASS DOORS							
T-11G-HC~TSL01	1	3	1/10	1.6	220 (100)	19 1/4 x 21 3/8 x 70 3/8	487 x 541 x 1786
T-11G-HC~FGD01	1	3	1/10	1.6	220 (100)	19 1/4 x 21 1/4 x 70 3/8	487 x 539 x 1786
T-12G-HC~FGD01	1	3	1/6	1.8	220 (100)	24 7/8 x 23 3/4 x 63	632 x 591 x 1600
T-19G-HC~FGD01	1	3	1/4	2.2	265 (121)	27 x 24 1/2 x 75 1/4	686 x 623 x 1918
T-23G-HC~FGD01	1	3	1/4	2.2	315 (143)	27 x 29 1/8 x 78 3/8	686 x 759 x 1991
T-35G-HC~FGD01	2	6	1/3	5.6	415 (189)	39 3/8 x 29 1/8 x 78 3/8	1007 x 759 x 1991
T-49G-HC~FGD01	2	6	1/2	5.4	465 (211)	54 1/4 x 29 3/8 x 78 3/8	1378 x 759 x 1991
T-72G-HC~FGD01	3	9	3/4	6.9	630 (286)	78 1/8 x 29 3/8 x 78 3/8	1985 x 759 x 1991
SOLID HALF DOORS							
T-23-2-HC	2	3	1/4	2.2	275 (125)	27 x 29 1/2 x 78 3/8	686 x 750 x 1991
T-49-4-HC	4	6	1/2	5.4	450 (205)	54 1/8 x 29 1/2 x 78 3/8	1375 x 750 x 1991
GLASS HALF DOORS							
T-23G-2-HC~FGD01	2	3	1/4	2.2	331 (151)	27 x 29 3/4 x 78 3/8	686 x 754 x 1991
T-49G-4-HC~FGD01	4	6	1/2	5.4	515 (234)	54 1/8 x 29 3/4 x 78 3/8	1375 x 756 x 1991
COMBINATION HALF DOORS							
T-23-1-G-1-HC~FGD01	2	3	1/4	2.2	311 (142)	27 x 29 3/4 x 78 3/8	686 x 754 x 1991
T-49-2-G-2-HC~FGD01	4	6	1/2	5.4	513 (233)	54 1/8 x 29 3/4 x 78 3/8	1375 x 756 x 1991

† Depth does not include 1 5/8" (42 mm) for glass door handles or 1/2" (13 mm) for system mechanical components.

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs 3 1/4" (83mm) castor height for T-19-HC & T-19G-HC~FGD01.

* Height on T-12-HC & T-12G-HC~FGD01 does not include 1" (26mm) for upper door hinge.

note: T-12-HC & T-12G-HC~FGD01 standard with leg levelers, optional 2 1/2" (64mm) diameter castors and 6" (153mm) seismic legs available, 6" (153mm) legs not available.

T-SERIES PASS-THRU

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D H* (in)	Cabinet Dimensions W D H* (mm)
PASS-THRU SOLID FRONT DOORS/SOLID REAR DOORS							
T-23PT-HC	1 fr / 1bk	3	1/4	2.2	325 (148)	27 x 32 1/8 x 78 3/8	686 x 816 x 1991

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

Bottom Mount Reach-Ins | TSD Series Refrigerators

SLIDE DOOR REFRIGERATORS

Solid & Glass Slide Door



TSD-09G-HC-LD



TSD-33-HC



TSD-47G-HC-LD



TSD-69-HC

Features/Benefits

- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Exterior - Stainless steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum liner. Stainless steel floor with coved corners.
- Energy efficient, "Low-E", thermal insulated glass doors.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- Legs standard on slide door models (except for TSD-09G-HC-LD which uses leg levelers).
- LED interior lighting. Safety shielded.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.

TRADITIONAL REACH-IN REFRIGERATOR

truemfg.com



TSD SERIES SLIDE DOOR REFRIGERATORS

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID DOORS							
TSD-33-HC	2	6	½	6.5	350 (159)	39½ x 29½ x 78¾	1004 x 753 x 1991
TSD-47-HC	2	6	½	8.5	410 (186)	54½ x 29½ x 78¾	1375 x 753 x 1991
TSD-69-HC	3	9	½	7.1	630 (286)	78½ x 29½ x 78¾	1985 x 753 x 1991
GLASS DOORS							
TSD-09G-HC-LD	2	3	¼	1.9	280 (127)	36 x 21 x 35¾	913 x 532 x 911
TSD-33G-HC-LD	2	6	½	6.5	370 (168)	39½ x 29½ x 78¾	1004 x 753 x 1991
TSD-47G-HC-LD	2	6	½	8.5	440 (200)	54½ x 29½ x 78¾	1375 x 753 x 1991
TSD-69G-HC-LD	3	9	½	7.1	630 (286)	78½ x 29½ x 78¾	1985 x 753 x 1991

† Depth does not include ¾" (10 mm) for door handles (solid or glass), ⅞" (23 mm) for door handle on TSD-09G-HC-LD.

* Height does not include 6 ⅛" (156mm) for legs or 5" (127mm) for optional castors. (TSD-09G-HC-LD standard with leg levelers).

Bottom Mount Reach-Ins | TS Series Refrigerators

STAINLESS STEEL REFRIGERATORS

Solid & Glass, Full & Half Door



TS-23G-HC-FGD01



TS-23-2-HC



TS-49-HC



TS-72G-HC-FGD01

Features/Benefits

- True's "TS" series is the choice for the exclusive stainless steel commercial application. Designed with enduring quality that protects your long-term investment, and oversized refrigeration that guarantees exceptional food preservation.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Maintains 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Large evaporator and coil heater permit short defrost cycle on freezers.
- Energy efficient, thermal insulated glass doors.
- Lifetime guaranteed door hinges.
- Energy efficient, thermal insulated glass doors. Adjustable, heavy-duty, PVC-coated wire shelves.
- LED interior lighting. Safety shielded.
- Alternative hinge orientation available on most TS-23/49/72 models. Contact factory for specifics.
- A "no-stoop", lower shelf.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.

TRADITIONAL REACH-IN REFRIGERATOR

truemfg.com



TS SERIES REACH-IN REFRIGERATORS

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID DOORS							
TS-23-HC	1	3	¼	2.2	285 (130)	27 x 29½ x 78¾	686 x 750 x 1991
TS-35-HC	2	6	⅓	5.6	350 (159)	39½ x 29½ x 78¾	1004 x 750 x 1991
TS-43-HC	2	6	½	5.4	380 (173)	47 x 29½ x 78¾	1194 x 750 x 1991
TS-49-HC	2	6	½	5.4	400 (182)	54½ x 29½ x 78¾	1375 x 750 x 1991
TS-72-HC	3	9	¾	6.9	615 (280)	78¾ x 29½ x 78¾	1985 x 750 x 1991
GLASS DOORS							
TS-23G-HC~FGD01	1	3	¼	2.2	315 (143)	27 x 29¾ x 78¾	686 x 756 x 1991
TS-49G-HC~FGD01	2	6	½	5.4	533 (242)	54¼ x 29¾ x 78¾	1378 x 759 x 1991
TS-72G-HC~FGD01	3	9	¾	6.9	691 (314)	78¾ x 29¾ x 78¾	1378 x 759 x 1991
SOLID HALF DOORS							
TS-23-2-HC	2	3	¼	2.2	320 (146)	27 x 29½ x 78¾	686 x 750 x 1991
TS-49-4-HC	4	6	½	5.4	400 (182)	54½ x 29½ x 78¾	1375 x 750 x 1991
GLASS HALF DOORS							
TS-23G-2-HC~FGD01	2	3	¼	2.2	330 (150)	27 x 29¾ x 78¾	686 x 756 x 1991
TS-49G-4-HC~FGD01	4	6	½	5.4	515 (232)	54½ x 29¾ x 78¾	1375 x 756 x 1991
COMBINATION HALF DOORS							
TS-23-1-G-1-HC~FGD01	2	3	¼	2.2	330 (150)	27 x 29¾ x 78¾	686 x 756 x 1991
TS-49-2-G-2-HC~FGD01	4	6	½	5.4	515 (233)	54½ x 29¾ x 78¾	1375 x 756 x 1991

† Depth does not include 1½" (42 mm) for door handles (glass door models only).

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

Top Mount Reach-Ins | SPEC Series Refrigerators

STR/STA/STG REFRIGERATORS

Solid & Glass, Full & Half Door



STA1R-1HG/1HS-HC



STR1R-2HS-HC



STR2R-2G-HC



STG2R-4G-HC

Features/Benefits

- Maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units. (optional on STA/STG units).
- LED interior lighting, safety shielded.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.



STR/STA/STG REACH-IN REFRIGERATORS

Model	# of Doors	# of Shelves STA/STG models	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID DOORS							
STR1R-1S-HC	1	3	¼	3.8	430 (196)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2R-2S-HC	2	6	½	5.9	650 (295)	52½ x 33¾ x 77¾	1337 x 858 x 1975
STR3R-3S-HC	3	9	¼	6.1	770 (350)	77¾ x 33¾ x 77¾	1975 x 858 x 1975
SOLID HALF DOORS							
STR1R-2HS-HC	2	3	¼	3.8	430 (196)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2R-4HS-HC	4	6	½	5.9	730 (332)	52½ x 33¾ x 77¾	1337 x 858 x 1975
STR3R-6HS-HC	6	9	¼	6.1	880 (400)	77¾ x 33¾ x 77¾	1975 x 858 x 1975
GLASS DOORS							
STR1R-1G-HC	1	3	¼	3.8	480 (218)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2R-2G-HC	2	6	½	5.9	795 (361)	52½ x 33¾ x 77¾	1337 x 858 x 1975
STR3R-3G-HC	3	9	¼	6.1	867 (394)	77¾ x 33¾ x 77¾	1975 x 858 x 1975
GLASS HALF DOORS							
STR1R-2HG-HC	2	3	¼	3.8	460 (209)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2R-4HG-HC	4	6	½	5.9	730 (332)	52½ x 33¾ x 77¾	1337 x 858 x 1975
COMBINATION HALF DOORS							
STR1R-1HG/1HS-HC	2	3	¼	3.8	450 (205)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2R-2HG/2HS-HC	4	6	½	5.9	710 (322)	52½ x 33¾ x 77¾	1337 x 858 x 1975

† Depth does not include 1½" (39 mm) for door handles.

* Height does not include 6⅞" (156mm) for castors or 6" (153mm) for optional legs

* Height does not include ¼" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

VLD VERTICAL LED LIGHTING MODELS

Model
GLASS DOORS
STR1RVLD-1G-HC
STR2RVLD-2G-HC
STR3RVLD-3G
GLASS HALF DOORS
STR1RVLD-2HG-HC
STR2RVLD-4HG-HC

note: Specifications are the same as standard models, just vertical LED Lighting added.

note: Only available on refrigerators.



Series Shelving

STR Series Shelving - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

STA Series Shelving - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

STG Series Shelving - (3) heavy-duty, PVC-coated wire shelves per section.

(4) different interior kits available.

Top Mount Reach-Ins | SPEC Series Refrigerators

STR/STA/STG PASS-THRU REFRIGERATORS

Solid & Glass, Full & Half Door



STG1RPT-2HG-1S-HC



STA1RPT-2HS-1S-HC



STA2PRT-4G-4HG-HC



STR2RRT-4HS-2S-HC

Features/Benefits

- Maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units. (optional on STA/STG units).
- LED interior lighting, safety shielded.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.



STR/STA/STG PASS-THRU REFRIGERATORS

Model	# of Doors	# of Shelves STA/STG models	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H*	Cabinet Dimensions W D† H*
SOLID FRONT/SOLID REAR DOORS							
STR1RPT-1S-1S-HC	1 fr / 1 bk	3	¼	3.8	475 (216)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-2S-2S-HC	2 fr / 2 bk	6	½	5.9	720 (327)	52½x 36½x 77¾	1337 x 918 x 1975
SOLID FRONT HALF DOORS/SOLID REAR DOORS							
STR1RPT-2HS-1S-HC	2 fr / 1 bk	3	¼	3.8	440 (200)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-4HS-2S-HC	4 fr / 2 bk	6	½	5.9	745 (338)	52½x 36½x 77¾	1337 x 918 x 1975
GLASS FRONT/SOLID REAR DOORS							
STR1RPT-1G-1S-HC	1 fr / 1 bk	3	¼	3.8	475 (216)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-2G-2S-HC	2 fr / 2 bk	6	½	5.9	720 (327)	52½x 36½x 77¾	1337 x 918 x 1975
GLASS FRONT HALF DOORS/SOLID REAR DOORS							
STR1RPT-2HG-1S-HC	2 fr / 1 bk	3	¼	3.8	520 (236)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-4HG-2S-HC	4 fr / 2 bk	6	½	5.9	820 (372)	52½x 36½x 77¾	1337 x 918 x 1975
COMBINATION FRONT HALF DOORS/SOLID REAR DOORS							
STR1RPT-1HG/1HS-1S-HC	2 fr / 1 bk	3	¼	3.8	490 (223)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-2HG/2HS-2S-HC	4 fr / 2 bk	6	½	5.9	720 (327)	52½x 36½x 77¾	1337 x 918 x 1975
SOLID FRONT/GLASS REAR DOORS							
STR1RPT-1S-1G-HC	1 fr / 1 bk	3	¼	3.8	475 (216)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-2S-2G-HC	2 fr / 2 bk	6	½	5.9	720 (327)	52½x 36½x 77¾	1337 x 918 x 1975
SOLID FRONT HALF DOORS/GLASS REAR DOORS							
STR1RPT-2HS-1G-HC	2 fr / 1 bk	3	¼	3.8	440 (200)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-4HS-2G-HC	4 fr / 2 bk	6	½	5.9	745 (338)	52½x 36½x 77¾	1337 x 918 x 1975
GLASS FRONT/GLASS REAR DOORS							
STR1RPT-1G-1G-HC	1 fr / 1 bk	3	¼	3.8	440 (200)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-2G-2G-HC	2 fr / 2 bk	6	½	5.9	720 (327)	52½x 36½x 77¾	1337 x 918 x 1975
COMBINATION FRONT HALF DOORS/GLASS REAR DOORS							
STR1RPT-1HG/1HS-1G-HC	2 fr / 1 bk	3	¼	3.8	475 (216)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-2HG/2HS-2S-HC	4 fr / 2 bk	6	½	5.9	775 (352)	52½x 36½x 77¾	1337 x 918 x 1975
GLASS FRONT HALF DOORS/GLASS REAR DOORS							
STR1RPT-2HG-1G-HC	2 fr / 1 bk	3	¼	3.8	440 (200)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-4HG-2G-HC	4 fr / 2 bk	6	½	5.9	820 (372)	52½x 36½x 77¾	1337 x 918 x 1975

† Depth does not include 1½" (39 mm) for door handles.

* Height does not include 6½" (156mm) for castors or 6" (153mm) for optional legs

* Height does not include ¼" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

VLD VERTICAL LED LIGHTING MODELS

Model
GLASS DOORS
STR1RPTVLD-1G-HC
STR2RPTVLD-2G-HC
GLASS HALF DOORS
STR1RPTVLD-2HG-HC
STR2RPTVLD-4HG-HC

note: Specifications are the same as standard models, just vertical LED Lighting added.

note: Only available on refrigerators.



Series Shelving

STR Series Shelving - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

STA Series Shelving - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

STG Series Shelving - (3) heavy-duty, PVC-coated wire shelves per section.

(4) different interior kits available.

Top Mount Reach-Ins | SPEC Series Refrigerators

STR/STA/STG ROLL-IN & ROLL-THRU REFRIGERATORS

Solid & Glass, Full Doors



STR1RRI-1S



STR2RRI-2S



STG2RRT-2G-2S



STR2RRI89-1S

Features/Benefits

- Maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- Accepts roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 66"H (686mm x 737mm x 1677mm). STR/STA/STG1RRI89-1S and STR/STA/STG2RRI89-2S accept roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 72"H (686mm x 737mm x 1,829mm) (supplied by others).
- Factory engineered, self-contained, refrigeration system with capillary tube using environmentally-friendly (CFC free) 134A refrigerant.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Incandescent interior lighting.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- Self-contained system.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.



STR/STA/STG ROLL-IN REFRIGERATORS

Model	# of Doors	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID DOORS						
STR1RRI-1S	1	1/3	8.9	470 (214)	35 x 34 3/4 x 83 3/4	889 x 883 x 2128
STR2RRI-2S	2	1/2	11.8	770 (350)	68 x 34 3/4 x 83 3/4	1728 x 883 x 2128
GLASS DOORS						
STR1RRI-1G	1	1/3	8.9	455 (207)	35 x 34 3/4 x 83 3/4	889 x 883 x 2128
STR2RRI-2G	2	1/2	11.8	760 (345)	68 x 34 3/4 x 83 3/4	1728 x 883 x 2128
SOLID DOOR 89" HIGH						
STR1RRI89-1S	1	1/3	8.9	450 (205)	35 x 34 3/4 x 88 3/4	889 x 883 x 2255
STR2RRI89-2S	2	1/2	11.8	805 (366)	68 x 34 3/4 x 88 3/4	1728 x 883 x 2255

† Depth does not include 4 1/4" (108 mm) for ramp.

* Height does not include 1/4" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

STR/STA/STG ROLL-THRU REFRIGERATORS

Model	# of Doors	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID DOORS						
STR1RRT-1S-1S	1 fr / 1 bk	1/3	8.9	540 (245)	35 x 37 1/2 x 83 3/4	889 x 953 x 2128
STR2RRT-2S-2S	2fr / 2bk	1/2	9.5	870 (395)	68 x 37 1/2 x 83 3/4	1728 x 953 x 2128
GLASS FRONT/SOLID REAR DOOR						
STR1RRT-1G-1S	1 fr / 1 bk	1/3	8.9	540 (245)	35 x 37 1/2 x 83 3/4	889 x 953 x 2128
STR2RRT-2G-2S	2fr / 2bk	1/2	9.5	710 (323)	68 x 37 1/2 x 83 3/4	1728 x 953 x 2128
SOLID DOOR 89" HIGH						
STR1RRT89-1S-1S	1 fr / 1 bk	1/3	8.9	540 (245)	35 x 37 1/2 x 88 3/4	889 x 953 x 2255
STR2RRT89-2S-2S	2fr / 2bk	1/2	9.5	760 (345)	68 x 37 1/2 x 88 3/4	1728 x 953 x 2255

† Depth does not include 4 1/4" (108 mm) for ramp.

* Height does not include 1/4" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

Bottom Mount Reach-Ins | T-Series Freezers

REACH-IN FREEZERS

Solid & Glass, Full & Half Door



T-23F-HC



T-12F-HC~FGD01



T-19FZ-HC



T-49F-4-HC



T-72F-HC

Features/Benefits

- -10°F (-23.3°C) product temperature (air off evaporator coil, -20°F (-28.9°C) holds frozen food and ice cream (T-19FZ-HC maintains 0°F (-18°C)).
- Exterior - Stainless steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum with stainless steel floor.
- Large evaporator and coil heater permit short defrost cycles.
- Automatic defrost system.
- Energy efficient, triple pane, thermal insulated glass doors.
- 4" (102mm) diameter castors standard (leg levelers standard for T-12-

- HC & T-12FG-HC~FGD01; 2.5" (64mm) diameter castors standard equipment for T-19F-HC & T-19FG-HC~FGD01).
- Lifetime guaranteed door hinges and torsion type closure system.
- 6" (153mm) Legs available for most models (6" (153mm) seismic legs only available on T-12F-HC & T-12FG-HC~FGD01).
- LED interior lighting. Safety shielded.
- Lifetime guaranteed recessed door handles on solid door models.
- Alternative hinge orientation available on most T-23F/49F/72F models. Contact factory for specifics.



T-SERIES TRADITIONAL REACH-IN FREEZERS

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID DOORS							
T-12F-HC	1	3	½	4.5	170 (78)	24⅞ x 23⅞ x 63⅞	632 x 588 x 1604
T-19F-HC	1	3	½	3.7	265 (120)	27 x 24½ x 75¼	686 x 623 x 1912
T-23F-HC	1	3	½	3.7	295 (134)	27 x 29½ x 78¾	686 x 750 x 1991
T-35F-HC	2	6	1	9.6	390 (177)	39½ x 29½ x 78¾	1004 x 750 x 1991
T-43F-HC	2	6	1	9.6	410 (186)	47 x 29½ x 78¾	1194 x 750 x 1991
T-49F-HC	2	6	1	9.6	480 (218)	54⅞ x 29½ x 78¾	1375 x 750 x 1991
T-72F-HC	3	9	¾	14.0	650 (295)	78⅞ x 29½ x 78¾	1985 x 750 x 1991
0° SOLID DOOR FREEZER							
T-19FZ-HC	1	3	½	3.7	270 (123)	27 x 24½ x 75¼	686 x 623 x 1912
GLASS DOORS							
T-12FG-HC~FGD01	1	3	½	4.5	255 (116)	24⅞ x 23¼ x 63	632 x 591 x 1600
T-23FG-HC~FGD01	1	3	¾	6.2	330 (150)	27 x 29⅞ x 78¾	686 x 759 x 1991
T-49FG-HC~FGD01	2	6	(2) ½	9.5	605 (275)	54⅞ x 29¾ x 78¾	1375 x 756 x 1991
T-72FG-HC~FGD01	3	9	¾	13.0	805 (366)	78⅞ x 29¾ x 78¾	1985 x 756 x 1991
SOLID HALF DOORS							
T-23F-2-HC	2	3	½	3.7	300 (137)	27 x 29½ x 78¾	686 x 750 x 1991
T-49F-4-HC	4	6	1	9.6	480 (218)	54⅞ x 29½ x 78¾	1375 x 750 x 1991

† Depth does not include 1⅝" (42 mm) for glass door handles or ½" (13 mm) for system mechanical components.

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs (3¼" (83mm) castor height for T-19F-HC).

* Height on T-12F-HC & T-12FG-HC~FGD01 does not include 1" (26mm) for upper door hinge.

note: T-12F-HC & T-12FG-HC~FGD01 standard with leg levelers, optional 2½" (64mm) diameter castors and 6" (153mm) seismic legs available, 6" (153mm) legs not available.

Bottom Mount Reach-Ins | TS Series Freezers

STAINLESS STEEL FREEZERS

Solid & Glass, Full & Half Door



TS-23F-HC



TS-23F-2-HC



TS-49FG-HC~FGD01



TS-72FG-HC~FGD01

Features/Benefits

- True's "TS" series is the choice for the exclusive stainless steel commercial application. Designed with enduring quality that protects your long-term investment, and oversized refrigeration that guarantees exceptional food preservation.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Maintains -10°F (-23.3°C) product temperatures.
- Large evaporator and coil heater permit short defrost cycle on freezers.
- Automatic defrost system.
- Energy efficient, triple pane, thermal insulated glass doors.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- LED interior lighting. Safety shielded.
- Alternative hinge orientation available on most TS-23/49/72 models. Contact factory for specifics.
- A "no-stoop", lower shelf.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.

TRADITIONAL REACH-IN FREEZER

truemfg.com



TS SERIES REACH-IN FREEZERS

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID DOORS							
TS-23F-HC	1	3	½	3.7	310 (141)	27 x 29½ x 78¾	686 x 750 x 1991
TS-35F-HC	2	6	1	9.6	455 (207)	39½ x 29½ x 78¾	1004 x 750 x 1991
TS-43F-HC	2	6	1	9.6	410 (186)	47 x 29½ x 78¾	1194 x 750 x 1991
TS-49F-HC	2	6	1	9.6	515 (234)	54½ x 29½ x 78¾	1375 x 750 x 1991
TS-72F-HC	3	9	¾	14.0	650 (295)	78½ x 29½ x 78¾	1985 x 750 x 1991
GLASS DOORS							
TS-23FG-HC~FGD01	1	3	¾	6.2	330 (150)	27 x 29¾ x 78¾	686 x 759 x 1991
TS-49FG-HC~FGD01	2	6	½	11.0	605 (275)	54½ x 29¾ x 78¾	1375 x 756 x 1991
TS-72FG-HC~FGD01	3	9	¾	13.0	760 (345)	78½ x 29¾ x 78¾	1985 x 756 x 1991
SOLID HALF DOORS							
TS-23F-2-HC	2	3	½	3.7	330 (150)	27 x 29½ x 78¾	686 x 750 x 1991
TS-49F-4-HC	4	6	1	9.6	440 (200)	54½ x 29½ x 78¾	1375 x 750 x 1991

† Depth does not include 1¾" (35 mm) for door handles (glass door models only).


* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

note: TS-49F-HC, TS-72F-HC, TS-49FG-HC~FGD01, TS-72FG-HC~FGD01 completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 20 amp dedicated outlet.

Top Mount Reach-Ins | SPEC Series Freezers

STR/STA/STG REACH-IN & PASS-THRU FREEZERS

Solid & Glass, Full & Half Door

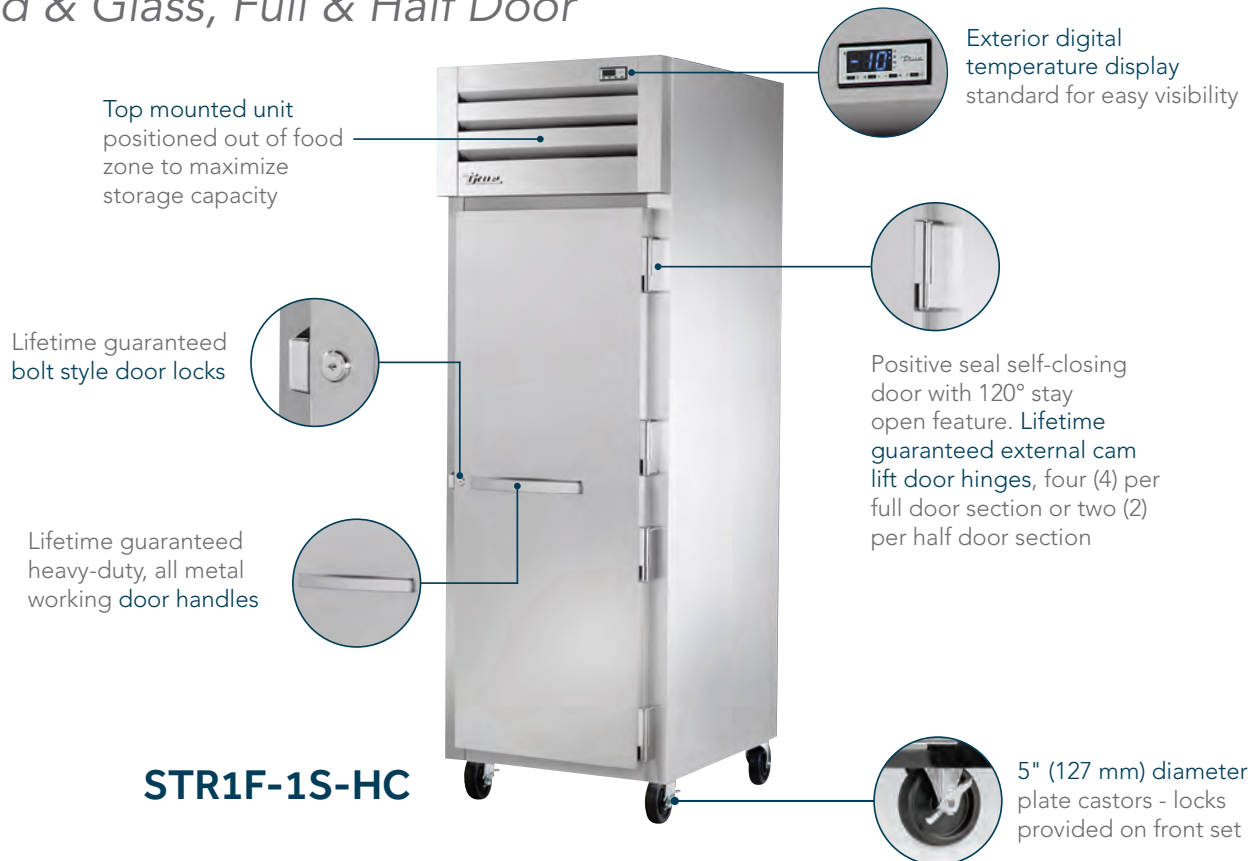

STR1F-2HS-HC



STA1FPT-1S-1S-HC



STG2F-4HS-HC



STR3F-3S-HC

Features/Benefits

- Maintains cabinet -10°F (-23.3°C) temperatures. Ideal for both frozen foods and ice cream.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Automatic defrost system time-initiated, temperature-terminated. Saves energy consumption and provides shortest possible defrost cycle.
- Automatic evaporator fan motor delay during defrost cycle.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units. (optional on STA/STG units).
- LED interior lighting, safety shielded.
- Energy efficient, triple pane, thermal insulated glass doors.
- Extruded, aluminum door frames on glass doors.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.



STR/STA/STG REACH-IN FREEZERS

Model	# of Doors	# of Shelves STA/STG models	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID DOORS							
STR1F-1S-HC	1	3	½	6.0	450 (205)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2F-2S-HC	2	6	1¼	9.4	675 (307)	52⅝ x 33¾ x 77¾	1337 x 858 x 1975
STR3F-3S-HC	3	9	(2) ¾	13.8	980 (445)	77¾ x 33¾ x 77¾	1975 x 858 x 1975
SOLID HALF DOORS							
STR1F-2HS-HC	2	3	½	6.0	410 (186)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2F-4HS-HC	4	6	1¼	9.4	704 (320)	52⅝ x 33¾ x 77¾	1337 x 858 x 1975
STR3F-6HS-HC	6	9	(2) ½	13.8	936 (425)	77¾ x 33¾ x 77¾	1975 x 858 x 1975
GLASS DOORS							
STR1F-1G-HC	1	3	1	8.9	520 (236)	27½ x 33¾ x 77¾	699 x 858 x 1975
GLASS HALF DOORS							
STR1F-2HG-HC	2	3	1	8.9	410 (186)	27½ x 33¾ x 77¾	699 x 858 x 1975

† Depth does not include 1½" (39 mm) for door handles.

* Height does not include 6⅞" (156mm) for castors or 6" (153mm) for optional legs

* Height does not include ¼" (7mm) for system mechanical components.

‡ Require 208-230/60Hz, single phase, NEMA 6-15R.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

STR/STA/STG PASS-THRU FREEZERS

Model	# of Doors	# of Shelves STA/STG models	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID DOORS							
STR1FPT-1S-1S	1 fr / 1 bk	3	¾	8.7	410 (186)	27½ x 36⅞ x 77¾	699 x 918 x 1975
SOLID HALF DOORS							
STR1FPT-2HS-2HS	2 fr / 2 bk	3	¾	8.7	410 (186)	27½ x 36⅞ x 77¾	699 x 918 x 1975

† Depth does not include 1½" (39 mm) for door handles.

* Height does not include 6⅞" (156mm) for castors or 6" (153mm) for optional legs

* Height does not include ¼" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

Series Shelving

STR Series Shelving - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

STA Series Shelving - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

STG Series Shelving - (3) heavy-duty, PVC-coated wire shelves per section.

(4) different interior kits available.

Top Mount Reach-Ins | SPEC Series Freezers

STR/STA/STG ROLL-IN FREEZERS

Solid & Glass, Full Doors

Top mounted unit positioned out of food zone to maximize storage capacity

Lifetime guaranteed bolt style door locks

Lifetime guaranteed heavy-duty, all metal working door handles

Positive seal self-closing door with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, three (3) per full door section

Exterior digital temperature display standard for easy visibility

STR1FRI-1S

One (1) heavy gauge stainless steel ramp per door

STR2FRI-2S

Features/Benefits

- An ideal -10°F (-23.3°C) for roll-in racks supporting frozen food and ice cream.
- Accepts roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 66"H (686mm x 737mm x 1677mm). STR/STA/STG1RRI89-1S and STR/STA/STG2RRI89-2S accept roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 72"H (686mm x 737mm x 1,829mm) (supplied by others).
- Factory engineered, self-contained, refrigeration system with capillary tube using environmentally-friendly 404A refrigerant.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Incandescent interior lighting.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.
- Automatic defrost system time-initiated, temperature-terminated.
- Automatic evaporator fan motor delay during defrost cycle.



STR/STA/STG ROLL-IN FREEZERS

Model	# of Doors	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID DOORS						
STR1FRI-1S	1	¾	12.0	410 (186)	35 x 34¾ x 83¾	889 x 883 x 2128
STR2FRI-2S ‡	2	1½	8.0	770 (350)	68 x 34¾ x 83¾	1728 x 883 x 2128

† Depth does not include 4¼" (108 mm) for ramp.

* Height does not include ¼" (7mm) for system mechanical components.

‡ Requires 115/208-230/60/1 Hz, single phase, 15 amp dedicated outlet.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

Bottom Mount Reach-Ins | DT - Dual Temperature

DT Series

Solid & Glass Full & Half Door Dual Temperature



T-23DT-G-HC-FGD01



T-49DT-HC



T-49DT-4-HC

Features/Benefits

- True's dual temperature models are equipped with two, independent, factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration systems.
- Refrigerator holds 33°F to 38°F (0.5°C to 3.3°C) temperature. Freezer holds -10°F (-23.3°C).
- Exterior - Stainless steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum with stainless steel floor.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- LED interior lighting. Safety shielded.
- Lifetime guaranteed recessed door handles on solid door models.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door refrigerator models. Energy efficient, triple pane, thermal insulated glass doors on glass door freezer models.
- T23DT models feature refrigerator on top, freezer on bottom. T-49DT models feature refrigerator on left, freezer on right.
- T-49DT Freezer compartments feature standard backguard to improve airflow.
- Automatic defrost system.
- A "no-stoop", lower shelf.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.

TRADITIONAL REACH-IN DUAL TEMP

truemfg.com



DT SERIES DUAL TEMPERATURE REFRIGERATOR/FREEZERS

Model	# of Doors	# of Shelves	HP Ref.	HP Frz.	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID DOORS								
T-23DT-HC	2	3	1/10	1/4	4.1	335 (152)	27 1/8 x 29 7/8 x 78 3/8	687 x 757 x 1991
T-49DT-HC	2	6	1/4	1/2	6.4	510 (232)	54 1/8 x 29 1/2 x 78 3/8	1375 x 750 x 1991
SOLID HALF DOORS								
T-49DT-4-HC	4	6	1/4	1/2	6.4	510 (232)	54 1/8 x 29 1/2 x 78 3/8	1375 x 750 x 1991
GLASS DOORS								
T-23DT-G-HC~FGD01	2	3	1/10	1/2	6.3	380 (173)	27 x 29 3/4 x 78 3/8	686 x 756 x 1991


† Depth does not include 1 3/8" (35 mm) for door handle(T-23DT-G-HC~FGD01 only).

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

Top Mount Reach-Ins | SPEC Series Dual Temperature

STR/STA/STG DUAL TEMPERATURE

Solid, Full & Half Doors

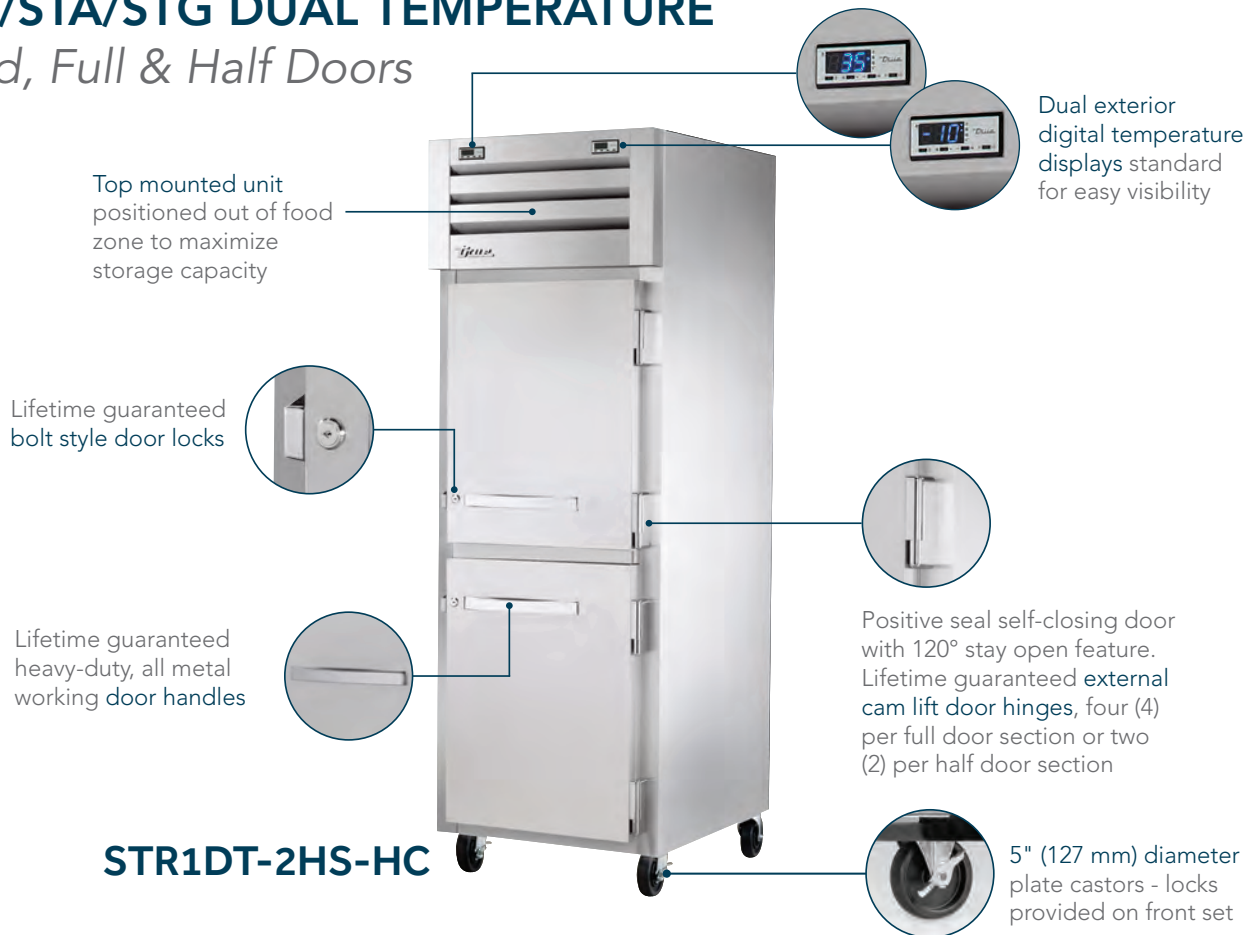

STR1DT-2HS-HC



STR1DTA-2HS-HC



STA2DT-2S



STA2DT-4HS

Features/Benefits

- Refrigerator section holds 33°F to 38°F (0.5°C to 3.3°C) temperature. Freezer section holds -10°F (-23.3°C).
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Automatic defrost system time-initiated, temperature-terminated. Saves energy consumption and provides shortest possible defrost cycle.
- Automatic evaporator fan motor delay during defrost cycle.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units. (optional on STA/STG units).
- LED interior lighting, safety shielded.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door refrigerator models.
- Energy efficient, triple pane, thermal insulated glass doors on glass door freezer models.
- Extruded, aluminum door frames on glass doors.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.
- Self-contained system.

SPEC SERIES DUAL TEMP

truemfg.com



STR/STA/STG DUAL TEMPERATURE REFRIGERATOR/FREEZERS

Model	# of Doors	# of Shelves	HP Ref.	HP - Frz.	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID FULL & HALF DOORS								
STR1DT-2HS-HC	2	3	1/10	1/4	3.7	500 (227)	27 1/2 x 33 3/4 x 77 3/4	699 x 858 x 1975
STR1DTA-2HS-HC	2	3	1/10	1/4	3.7	420 (191)	27 1/2 x 33 3/4 x 77 3/4	699 x 858 x 1975
STR2DT-2S	2	6	1/5	1/2	12.0	760 (345)	52 5/8 x 33 3/4 x 77 3/4	1337 x 858 x 1975
STR2DT-4HS	4	6	1/5	1/2	11.6	665 (302)	52 5/8 x 33 3/4 x 77 3/4	1337 x 858 x 1975

† Depth does not include 1 1/2" (39 mm) for door handles.

* Height does not include 6 1/8" (156mm) for castors or 6" (153mm) for optional legs

* Height does not include 1/4" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

Series Shelving

STR Series Shelving - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

STA Series Shelving - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

STG Series Shelving - (3) heavy-duty, PVC-coated wire shelves per section.

(4) different interior kits available.

REACH-IN REFRIGERATION



Flexible. Adaptable. Reliably cold. True upright reach-ins have been the chef's companion in commercial kitchens around the world for over 40 years. Every combination imaginable of solid or glass, with multiple temperature ranges, and available in a variety of sizes, provides cold storage for any application.