



# BAR

# REFRIGERATION



## BAR REFRIGERATION REACH-IN & PASS-THRU, BLACK EXTERIOR

*Solid & Glass, Swing & Slide Doors*



TBR48-RISZ1-L-B-SS-1



TBR60-RISZ1-L-B-GG-1



TBR72-RISZ1-L-B-SSS-1



TBR108-RISZ1-L-B-GGGG-1

## Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
  - Exterior - Black, powder coated cold-rolled steel with stainless steel countertop.
  - Interior - stainless steel floor and sides.
  - White LED Interior Lighting standard on solid door models. (14-color TruLumina® optional)
  - NSF/ANSI Standard 7 compliant for open food product.
  - Front Air Intake & Front Air Discharge.
  - 24" (610mm) depth makes for easy placement in tight areas. Conserves valuable work space.
  - Positive seal doors. (Excludes slide door models)
  - Each cabinet designed to accommodate a variety of beer kegs.
  - Leg levelers standard with 7 other castor/leg options for various heights.
  - Three (3) interior access ports.
  - All TBR models also available in right side compressor versions.
- Glass door models only...**
- Energy efficient, "Low-E", thermal glass doors.
  - 14-color TruLumina® standard on all glass door models.
- Pass-Thru models only...**
- Designed for convenient front and rear access for serving.



## TBR™ BAR REFRIGERATION REACH-IN, BLACK EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS &amp; LEFT SIDE REFRIGERATION SYSTEM</b>							
TBR32-RISZ1-L-B-S-1	1	3	½	1.8	240 (109)	32 x 24⅞ x 34¾	813 x 631 x 881
TBR36-RISZ1-L-B-S-1	1	3	½	1.8	255 (116)	36 x 24⅞ x 34¾	914 x 631 x 881
TBR48-RISZ1-L-B-SS-1	2	6	½	1.8	320 (145)	48 x 24⅞ x 34¾	1219 x 631 x 881
TBR52-RISZ1-L-B-SS-1	2	6	½	1.8	355 (161)	52 x 24⅞ x 34¾	1321 x 631 x 881
TBR60-RISZ1-L-B-SS-1	2	6	¾	3.2	380 (173)	60 x 24⅞ x 34¾	1524 x 631 x 881
TBR72-RISZ1-L-B-SSS-1	3	9	¾	3.2	435 (198)	72 x 24⅞ x 34¾	1829 x 631 x 881
TBR84-RISZ1-L-B-SSS-1	3	9	¾	3.2	470 (214)	84 x 24⅞ x 34¾	2134 x 631 x 881
TBR92-RISZ1-L-B-SSSS-1	4	12	¾	3.2	510 (232)	92 x 24⅞ x 34¾	2337 x 631 x 881
TBR108-RISZ1-L-B-SSSS-1	4	12	¾	3.2	595 (270)	108 x 24⅞ x 34¾	2744 x 631 x 881
<b>GLASS SWING DOORS &amp; LEFT SIDE REFRIGERATION SYSTEM</b>							
TBR32-RISZ1-L-B-G-1	1	3	½	1.8	245 (112)	32 x 24⅞ x 34¾	813 x 631 x 881
TBR36-RISZ1-L-B-G-1	1	3	½	1.8	285 (130)	36 x 24⅞ x 34¾	915 x 631 x 881
TBR48-RISZ1-L-B-GG-1	2	6	½	1.8	335 (152)	48 x 24⅞ x 34¾	1219 x 631 x 881
TBR52-RISZ1-L-B-GG-1	2	6	½	1.8	350 (159)	52 x 24⅞ x 34¾	1321 x 631 x 881
TBR60-RISZ1-L-B-GG-1	2	6	¾	3.2	390 (177)	60 x 24⅞ x 34¾	1524 x 631 x 881
TBR72-RISZ1-L-B-GGG-1	3	9	¾	3.2	445 (202)	72 x 24⅞ x 34¾	1829 x 631 x 881
TBR84-RISZ1-L-B-GGG-1	3	9	¾	3.2	470 (214)	84 x 24⅞ x 34¾	2134 x 631 x 881
TBR92-RISZ1-L-B-GGGG-1	4	12	¾	3.2	510 (232)	92 x 24⅞ x 34¾	2337 x 631 x 881
TBR108-RISZ1-L-B-GGGG-1	4	12	¾	3.2	610 (277)	108 x 24⅞ x 34¾	2744 x 631 x 881
<b>GLASS SLIDE DOORS &amp; LEFT SIDE REFRIGERATION SYSTEM</b>							
TBR48-RISZ1-L-B-11-1	2	6	½	1.8	325 (148)	48 x 24⅞ x 34¾	1219 x 631 x 881
TBR52-RISZ1-L-B-11-1	2	6	½	1.8	350 (159)	52 x 24⅞ x 34¾	1321 x 631 x 881
TBR60-RISZ1-L-B-11-1	2	6	¾	3.2	385 (175)	60 x 24⅞ x 34¾	1524 x 631 x 881
TBR72-RISZ1-L-B-111-1	3	9	¾	3.2	445 (202)	72 x 24⅞ x 34¾	1829 x 631 x 881

† Depth does not include 1½" (35mm) for swing door handles, ¾" (16mm) for slide door handles.

## TBR™ BAR REFRIGERATION PASS-THRU, BLACK EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS (FRONT &amp; REAR), LEFT SIDE REFRIGERATION SYSTEM</b>							
TBR36-PTSZ1-L-B-S-S-1	2	3	½	1.8	265 (121)	36 x 27 x 34¾	915 x 684 x 881
TBR60-PTSZ1-L-B-SS-SS-1	4	6	¾	3.2	395 (180)	60 x 27 x 34¾	684 x 684 x 881
TBR84-PTSZ1-L-B-SSS-SSS-1	6	9	¾	3.2	470 (214)	84 x 27 x 34¾	2134 x 684 x 881
<b>GLASS SWING DOORS (FRONT &amp; REAR), LEFT SIDE REFRIGERATION SYSTEM</b>							
TBR36-PTSZ1-L-B-G-G-1	2	3	½	1.8	265 (121)	36 x 27 x 34¾	915 x 684 x 881
TBR60-PTSZ1-L-B-GG-GG-1	4	6	¾	3.2	395 (180)	60 x 27 x 34¾	1524 x 684 x 881
TBR84-PTSZ1-L-B-GGG-GGG-1	3	9	¾	3.2	555 (252)	84 x 24⅞ x 34¾	2134 x 631 x 881
<b>GLASS SLIDE DOORS (FRONT &amp; REAR), LEFT SIDE REFRIGERATION SYSTEM</b>							
TBR60-PTSZ1-L-B-11-11-1	2	6	¾	3.2	395 (180)	60 x 24⅞ x 34¾	1524 x 631 x 881

† Depth does not include 1½" (35mm) for swing door handles, ¾" (16mm) for slide door handles.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



All dimensions are rounded up to the nearest 1/8" (whole millimeter) | Specifications subject to change without notice.

## BAR REFRIGERATION REACH-IN & PASS-THRU, STAINLESS EXTERIOR *Solid & Glass, Swing & Slide Doors*



TBR48-RISZ1-L-S-GG-1



TBR52-RISZ1-L-S-11-1



TBR60-RISZ1-L-S-SS-1



TBR72-RISZ1-L-S-GGG-1

## Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
  - Exterior - Stainless steel exterior for those who appreciate the value of stainless.
  - Interior - stainless steel floor and sides.
  - White LED Interior Lighting standard on solid door models. (optional 14-color TruLumina®)
  - NSF/ANSI Standard 7 compliant for open food product.
  - Front Air Intake & Front Air Discharge.
  - 24" (610mm) depth makes for easy placement in tight areas. Conserves valuable work space.
  - Positive seal doors. (Excludes slide door models)
  - Each cabinet designed to accommodate a variety of beer kegs. See our beer keg footprint brochure on our website.
  - Leg levelers standard with 7 other castor/leg options for various heights.
  - Three (3) interior access ports.
  - All TBR models also available in right side compressor versions.
- Glass door models only...**
- Energy efficient, "Low-E", thermal glass doors.
  - 14-color TruLumina® standard on all glass door models.
- Pass-Thru models only...**
- Designed for convenient front and rear access for serving.



## TBR™ BAR REFRIGERATION REACH-IN, STAINLESS EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS &amp; LEFT SIDE REFRIGERATION SYSTEM</b>							
TBR32-RISZ1-L-S-S-1	1	3	½	1.8	240 (109)	32 x 24¾ x 34¾	813 x 631 x 881
TBR36-RISZ1-L-S-S-1	1	3	½	1.8	290 (132)	36 x 24¾ x 34¾	914 x 631 x 881
TBR48-RISZ1-L-S-SS-1	2	6	½	1.8	335 (152)	48 x 24¾ x 34¾	1219 x 631 x 881
TBR52-RISZ1-L-S-SS-1	2	6	½	1.8	355 (161)	52 x 24¾ x 34¾	1321 x 631 x 881
TBR60-RISZ1-L-S-SS-1	2	6	¾	3.2	395 (180)	60 x 24¾ x 34¾	1524 x 631 x 881
TBR72-RISZ1-L-S-SSS-1	3	9	¾	3.2	440 (200)	72 x 24¾ x 34¾	1829 x 631 x 881
TBR84-RISZ1-L-S-SSS-1	3	9	¾	3.2	470 (214)	84 x 24¾ x 34¾	2134 x 631 x 881
TBR92-RISZ1-L-S-SSSS-1	4	12	¾	3.2	510 (232)	92 x 24¾ x 34¾	2337 x 631 x 881
TBR108-RISZ1-L-S-SSSS-1	4	12	¾	3.2	630 (286)	108 x 24¾ x 34¾	2744 x 631 x 881
<b>GLASS SWING DOORS &amp; LEFT SIDE REFRIGERATION SYSTEM</b>							
TBR32-RISZ1-L-S-G-1	1	3	½	1.8	290 (132)	32 x 24¾ x 34¾	813 x 631 x 881
TBR36-RISZ1-L-S-G-1	1	3	½	1.8	290 (132)	36 x 24¾ x 34¾	915 x 631 x 881
TBR48-RISZ1-L-S-GG-1	2	6	½	1.8	335 (152)	48 x 24¾ x 34¾	1219 x 631 x 881
TBR52-RISZ1-L-S-GG-1	2	6	½	1.8	365 (166)	52 x 24¾ x 34¾	1321 x 631 x 881
TBR60-RISZ1-L-S-GG-1	2	6	¾	3.2	395 (180)	60 x 24¾ x 34¾	1524 x 631 x 881
TBR72-RISZ1-L-S-GGG-1	3	9	¾	3.2	440 (200)	72 x 24¾ x 34¾	1829 x 631 x 881
TBR84-RISZ1-L-S-GGG-1	3	9	¾	3.2	470 (214)	84 x 24¾ x 34¾	2134 x 631 x 881
TBR92-RISZ1-L-S-GGGG-1	4	12	¾	3.2	510 (232)	92 x 24¾ x 34¾	2337 x 631 x 881
TBR108-RISZ1-L-S-GGGG-1	4	12	¾	3.2	610 (277)	108 x 24¾ x 34¾	2744 x 631 x 881
<b>GLASS SLIDE DOORS &amp; LEFT SIDE REFRIGERATION SYSTEM</b>							
TBR48-RISZ1-L-S-11-1	2	6	½	1.8	330 (150)	48 x 24¾ x 34¾	1219 x 631 x 881
TBR52-RISZ1-L-S-11-1	2	6	½	1.8	350 (159)	52 x 24¾ x 34¾	1321 x 631 x 881
TBR60-RISZ1-L-S-11-1	2	6	¾	3.2	395 (180)	60 x 24¾ x 34¾	1524 x 631 x 881
TBR72-RISZ1-L-S-111-1	3	9	¾	3.2	450 (205)	72 x 24¾ x 34¾	1829 x 631 x 881

† Depth does not include 1½" (35mm) for swing door handles, ¾" (16mm) for slide door handles.

## TBR™ BAR REFRIGERATION PASS-THRU, STAINLESS EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS (FRONT &amp; REAR), LEFT SIDE REFRIGERATION SYSTEM</b>							
TBR36-PTSZ1-L-S-S-S-1	2	3	½	1.8	290 (132)	36 x 27 x 34¾	915 x 684 x 881
TBR60-PTSZ1-L-S-SS-SS-1	4	6	¾	3.2	395 (180)	60 x 27 x 34¾	1524 x 684 x 881
TBR84-PTSZ1-L-S-SSS-SSS-1	6	9	¾	3.2	470 (214)	84 x 27 x 34¾	2134 x 684 x 881
<b>GLASS SWING DOORS (FRONT &amp; REAR), LEFT SIDE REFRIGERATION SYSTEM</b>							
TBR36-PTSZ1-L-S-G-G-1	2	3	½	1.8	290 (132)	36 x 27 x 34¾	915 x 684 x 881
TBR60-PTSZ1-L-S-GG-GG-1	4	6	¾	3.2	395 (180)	60 x 27 x 34¾	1524 x 684 x 881
TBR84-PTSZ1-L-S-GGG-GGG-1	3	9	¾	3.2	535 (243)	84 x 24¾ x 34¾	2134 x 631 x 881
<b>GLASS SLIDE DOORS (FRONT &amp; REAR), LEFT SIDE REFRIGERATION SYSTEM</b>							
TBR60-PTSZ1-L-S-11-11-1	2	6	¾	3.2	395 (180)	60 x 24¾ x 34¾	1524 x 631 x 881

† Depth does not include 1½" (35mm) for swing door handles, ¾" (16mm) for slide door handles.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



All dimensions are rounded up to the nearest 1/8" (whole millimeter) | Specifications subject to change without notice.

## BACK BAR REACH-IN, STAINLESS TOP, BLACK & STAINLESS EXTERIOR *Solid & Glass, Swing Doors*



### TBB-2G-HC-LD



TBB-1-HC



TBB-2G-S-HC



TBB-3G-HC



TBB-4PT-S

## Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Exterior - Black, powder coated cold-rolled steel with stainless steel countertop.
- Interior - Stainless steel floor with 1/2" (13mm) lip & heavy galvanized steel walls.
- Recessed handles on solid door models.
- LED interior lighting.
- Air vents on side to maximize flow of fresh air through condenser.
- Positive seal doors.
- Self-contained installation.
- Available with optional legs or 2 1/2" (64mm) or 4" (102mm) diameter castors (TBB-1 & TBB-1-S: 4" diameter castors standard equipment; 2 1/2" (64mm) diameter castors & legs not available).

### Glass door models have...

- Energy efficient, "Low-E", thermal glass doors.
- Extruded, aluminum door frames on glass doors.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

### Pass-Thru models have...

- Designed for convenient front and rear access for serving.

### Stainless Steel models have...

- Heavy duty stainless steel exterior and countertop.



## TBB® BACK BAR REACH-IN, STAINLESS TOP, BLACK EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS</b>							
TBB-1-HC	1	2	1/10	1.4	210 (96)	23½ x 31¾ x 38¾	597 x 810 x 985
TBB-2-HC	2	4	¼	2.8	360 (164)	58¾ x 27¾ x 37	1496 x 705 x 940
TBB-3-HC	2	4	¼	2.8	400 (182)	69½ x 27¾ x 37	1756 x 705 x 940
TBB-4-HC	3	6	¼	2.8	485 (220)	90¾ x 27¾ x 37	2296 x 705 x 940
<b>GLASS SWING DOORS</b>							
TBB-2G-HC-LD	2	4	¼	2.8	365 (166)	58¾ x 27¾ x 37	1496 x 705 x 940
TBB-3G-HC-LD	2	4	¼	2.8	440 (200)	69½ x 27¾ x 37	1756 x 705 x 940
TBB-4G-HC-LD	3	6	¼	2.8	595 (270)	90¾ x 27¾ x 37	2296 x 705 x 940

† Depth does not include 1¾" (35mm) for door handle (glass door models) or 1" (26mm) for rear bumpers (excludes TBB-1-HC).  
 note: TBB-2G-HC-LD not available with door locks.

## TBB® BACK BAR PASS-THRU, STAINLESS TOP, BLACK EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS (FRONT &amp; REAR)</b>							
TBB-4PT-HC	3 fr / 3 bk	6	¼	2.9	580 (263)	90¾ x 31 x 37	2296 x 788 x 940

## TBB® BACK BAR REACH-IN, STAINLESS TOP, STAINLESS EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS</b>							
TBB-1-S-HC	1	2	1/10	1.4	210 (96)	23½ x 31¾ x 38¾	597 x 810 x 985
TBB-2-S-HC	2	4	¼	2.8	385 (175)	58¾ x 27¾ x 37	1496 x 705 x 940
TBB-3-S-HC	2	4	¼	2.8	415 (189)	69½ x 27¾ x 37	1756 x 705 x 940
TBB-4-S-HC	3	6	¼	2.8	530 (241)	90¾ x 27¾ x 37	2296 x 705 x 940
<b>GLASS SWING DOORS</b>							
TBB-2G-S-HC-LD	2	4	¼	2.8	395 (180)	58¾ x 27¾ x 37	1496 x 705 x 940
TBB-3G-S-HC-LD	2	4	¼	2.8	440 (200)	69½ x 27¾ x 37	1756 x 705 x 940
TBB-4G-S-HC-LD	3	6	¼	2.8	595 (270)	90¾ x 27¾ x 37	2296 x 705 x 940

† Depth does not include 1¾" (35mm) for door handle (glass door models) or 1" (26mm) for rear bumpers (excludes TBB-1-S-HC).  
 note: TBB-2G-S-HC-LD not available with door locks.

## TBB® BACK BAR PASS-THRU, STAINLESS TOP, STAINLESS EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS (FRONT &amp; REAR)</b>							
TBB-4PT-S-HC	3 fr / 3 bk	6	¼	2.9	585 (266)	90¾ x 31 x 37	2296 x 788 x 940

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



All dimensions are rounded up to the nearest 1/8" (whole millimeter) | Specifications subject to change without notice.



# Bar Refrigeration | TBB<sup>®</sup>24

## BACK BAR REACH-IN, STAINLESS TOP, BLACK & STAINLESS EXTERIOR *Solid & Glass, Swing Doors*



Door locks - standard

TBB24 models feature a finished stainless steel top (SFT) providing an excellent work or storage area, or a black sub-top (BST) feature designed to slide under existing cabinetry providing a built-in look



3/8" (10mm) thick, heavy-duty, PVC-coated wire shelving. Two shelves per door on two door models. Three door models feature two shelves for the right door and two long shelves which span both the left and center doors



**TBB24-48-2G-Z1-SFT-B-1**



**TBB24-48-2S-Z1-BST-S-1**



**TBB24-60-2S-Z1-SFT-B-1**



**TBB24-60-2G-Z1-SFT-S-1**



**TBB24-72-3G-Z1-BST-B-1**

## Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- 24" (610mm) depth makes for easy placement in tight areas. Conserves valuable work space.
- Exterior - Black, powder coated cold-rolled steel with stainless steel countertop or black sub-top..
- Interior - Stainless steel floor with heavy gauge galvanized steel walls.
- Recessed handles on solid door models.
- Interior LED lighting.
- NSF/ANSI Standard 7 compliant for packaged and bottle product.
- Air vents on side to maximize flow of fresh air through condenser.
- Optional wine racks, wine or beer organizers available.
- Positive seal doors.
- Self-contained system.
- Ideal for bottle beer or can accommodate a variety of beer kegs.
- Available with optional legs or 2½" (64mm) or 4" (102mm) diameter castors.

### Glass door models have...

- Energy efficient, "Low-E", thermal glass doors.
- Extruded, aluminum door frames on glass doors.
- Glass doors fitted with flat top door handles.

### Stainless Steel models have...

- Heavy duty stainless steel exterior and countertop.



## TBB<sup>®</sup>24 BACK BAR REACH-IN, STAINLESS FINISHED TOP, BLACK EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS</b>							
TBB24-48-2S-Z1-SFT-B-1	2	4	½	1.8	290 (132)	48⅞ x 24⅞ x 34¾	1220 x 632 x 882
TBB24-60-2S-Z1-SFT-B-1	2	4	¼	3.2	345 (157)	60⅞ x 24⅞ x 34¾	1525 x 632 x 882
TBB24-72-3S-Z1-SFT-B-1	3	6	¼	3.2	415 (189)	72⅞ x 24⅞ x 34¾	1829 x 632 x 882
<b>GLASS SWING DOORS</b>							
TBB24-48-2G-Z1-SFT-B-1	2	4	½	1.8	290 (132)	48⅞ x 24⅞ x 34¾	1220 x 632 x 882
TBB24-60-2G-Z1-SFT-B-1	2	4	¼	3.2	345 (157)	60⅞ x 24⅞ x 34¾	1525 x 632 x 882
TBB24-72-3G-Z1-SFT-B-1	3	6	¼	3.2	415 (189)	72⅞ x 24⅞ x 34¾	1829 x 632 x 882

† Depth does not include 1½" (39mm) for flat top door handle (glass door models).

\* Height does not include ¼" (7mm) for leg levelers.

## TBB<sup>®</sup>24 BACK BAR REACH-IN, STAINLESS FINISHED TOP, STAINLESS EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS</b>							
TBB24-48-2S-Z1-SFT-S-1	2	4	½	1.8	290 (132)	48⅞ x 24⅞ x 34¾	1220 x 632 x 882
TBB24-60-2S-Z1-SFT-S-1	2	4	¼	3.2	345 (157)	60⅞ x 24⅞ x 34¾	1525 x 632 x 882
TBB24-72-3S-Z1-SFT-S-1	3	6	¼	3.2	415 (189)	72⅞ x 24⅞ x 34¾	1829 x 632 x 882
<b>GLASS SWING DOORS</b>							
TBB24-48-2G-Z1-SFT-S-1	2	4	½	1.8	290 (132)	48⅞ x 24⅞ x 34¾	1220 x 632 x 882
TBB24-60-2G-Z1-SFT-S-1	2	4	¼	3.2	345 (157)	60⅞ x 24⅞ x 34¾	1525 x 632 x 882
TBB24-72-3G-Z1-SFT-S-1	3	6	¼	3.2	415 (189)	72⅞ x 24⅞ x 34¾	1829 x 632 x 882

† Depth does not include 1½" (39mm) for flat top door handle (glass door models).

\* Height does not include ¼" (7mm) for leg levelers.

## TBB<sup>®</sup>24 BACK BAR REACH-IN, BLACK SUB-TOP, BLACK EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS</b>							
TBB24-48-2S-Z1-BST-B-1	2	4	½	1.8	290 (132)	48⅞ x 24⅞ x 34¼	1220 x 632 x 870
TBB24-60-2S-Z1-BST-B-1	2	4	¼	3.2	345 (157)	60⅞ x 24⅞ x 34¼	1525 x 632 x 870
TBB24-72-3S-Z1-BST-B-1	3	6	¼	3.2	415 (189)	72⅞ x 24⅞ x 34¼	1829 x 632 x 870
<b>GLASS SWING DOORS</b>							
TBB24-48-2G-Z1-BST-B-1	2	4	½	1.8	290 (132)	48⅞ x 24⅞ x 34¼	1220 x 632 x 870
TBB24-60-2G-Z1-BST-B-1	2	4	¼	3.2	345 (157)	59⅞ x 23¾ x 34¼	1521 x 616 x 870
TBB24-72-3G-Z1-BST-B-1	3	6	¼	3.2	415 (189)	72⅞ x 24⅞ x 34¼	1829 x 632 x 870

† Depth does not include 1½" (39mm) for flat top door handle (glass door models).

\* Height does not include ¼" (7mm) for leg levelers.

## TBB<sup>®</sup>24 BACK BAR REACH-IN, BLACK SUB-TOP, STAINLESS EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS</b>							
TBB24-48-2S-Z1-BST-S-1	2	4	½	1.8	290 (132)	48⅞ x 24⅞ x 34¼	1220 x 632 x 870
TBB24-60-2S-Z1-BST-S-1	2	4	¼	3.2	345 (157)	60⅞ x 24⅞ x 34¼	1525 x 632 x 870
TBB24-72-3S-Z1-BST-S-1	3	6	¼	3.2	415 (189)	72⅞ x 24⅞ x 34¼	1829 x 632 x 870
<b>GLASS SWING DOORS</b>							
TBB24-48-2G-Z1-BST-S-1	2	4	½	1.8	290 (132)	48⅞ x 24⅞ x 34¼	1220 x 632 x 870
TBB24-60-2G-Z1-BST-S-1	2	4	¼	3.2	345 (157)	60⅞ x 24⅞ x 34¼	1525 x 632 x 870
TBB24-72-3G-Z1-BST-S-1	3	6	¼	3.2	415 (189)	72⅞ x 24⅞ x 34¼	1829 x 632 x 870

† Depth does not include 1½" (39mm) for flat top door handle (glass door models).


\* Height does not include ¼" (7mm) for leg levelers.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



## DRAFT REFRIGERATION REACH-IN & PASS-THRU, BLACK EXTERIOR

### Solid & Glass, Swing Doors

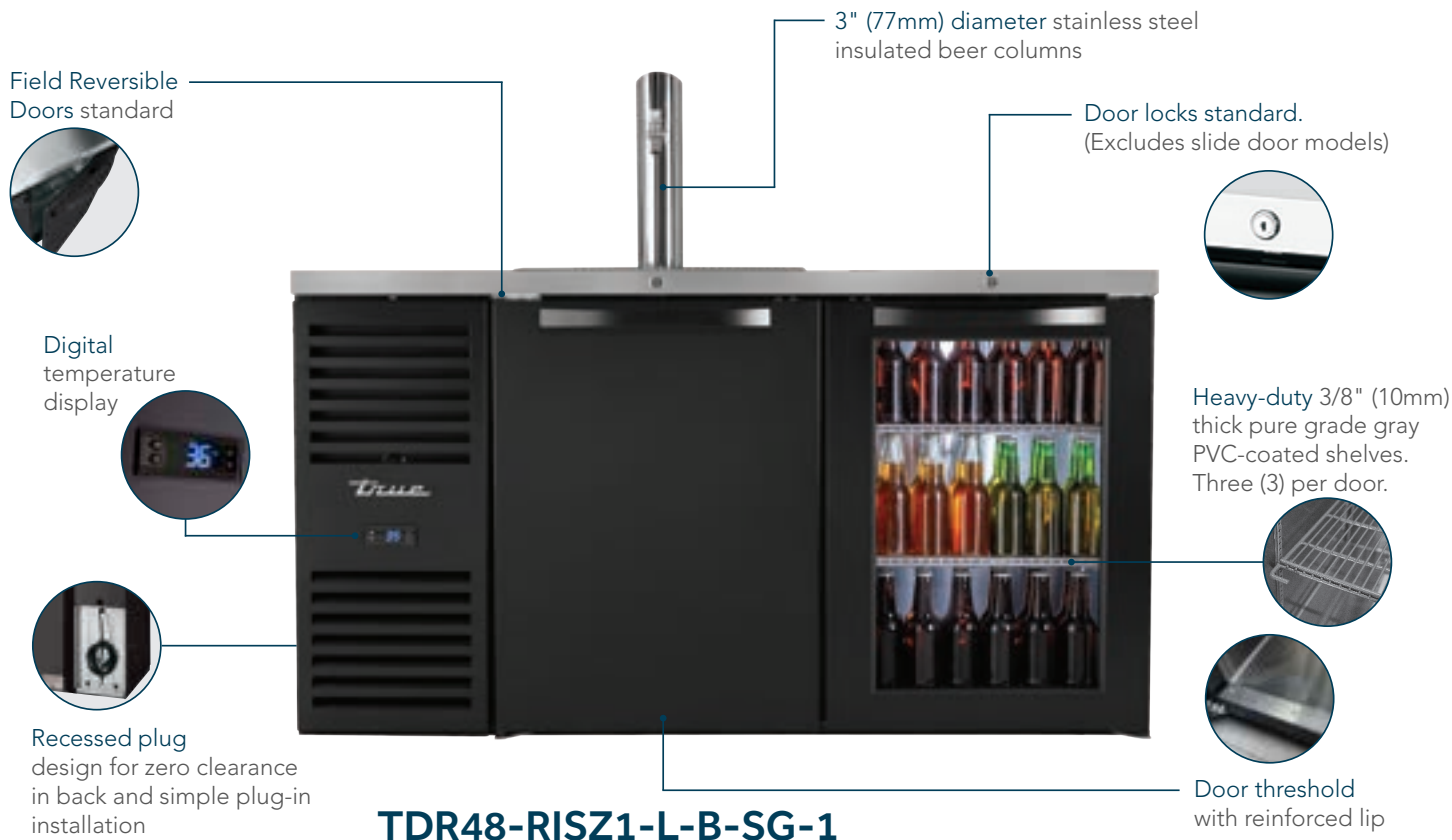

**TDR48-RISZ1-L-B-SG-1**



**TDR32-RISZ1-L-B-S-1**



**TDR60-RISZ1-L-B-SS-1**



**TDR84-RISZ1-L-B-SSS-1**



**TDR108-RISZ1-L-B-SSSS-1**

## Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
  - Exterior - Black, powder coated cold-rolled steel with stainless steel countertop.
  - Interior - stainless steel floor and sides.
  - Insulated and chilled draft columns.
  - Fan motors direct large volume of cold air into draft columns.
  - White LED Interior Lighting for excellent visibility. (optional 14-color TruLumina® on glass and solid door combos)
  - NSF/ANSI Standard 7 compliant for packaged and bottled product.
  - Zero clearance recessed plug and front breathing.
  - 24" (610mm) depth makes for easy placement in tight areas. Conserves valuable work space.
  - Positive seal doors.
  - Each cabinet designed to accommodate a variety of beer kegs. See keg brochure on website for details.
  - Leg levelers standard with 7 other castor/leg options for various heights.
  - Three (3) interior access ports.
  - All TDR models also available in right side compressor versions.
- Glass door models only...**
- Shelves included.
  - Energy efficient, "Low-E", thermal glass doors.
  - 14-color TruLumina® lighting standard.
- Pass-Thru models only...**
- Designed for convenient front and rear access for serving.



## TDR™ DRAFT REFRIGERATION, BLACK EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS &amp; LEFT SIDE REFRIGERATION SYSTEM</b>							
TDR32-RISZ1-L-B-S-1	1	0	½	1.8	240 (109)	32 x 24⅞ x 34¾	813 x 631 x 881
TDR36-RISZ1-L-B-S-1	1	0	½	1.8	270 (123)	36 x 24⅞ x 34¾	914 x 631 x 881
TDR48-RISZ1-L-B-SS-1	2	0	½	1.8	310 (141)	48 x 24⅞ x 34¾	1219 x 631 x 881
TDR52-RISZ1-L-B-SS-1	2	0	½	1.8	320 (146)	52 x 24⅞ x 34¾	1321 x 631 x 881
TDR60-RISZ1-L-B-SS-1	2	0	¼	3.2	330 (150)	60 x 24⅞ x 34¾	1524 x 631 x 881
TDR72-RISZ1-L-B-SSS-1	3	0	¼	3.2	395 (180)	72 x 24⅞ x 34¾	1829 x 631 x 881
TDR84-RISZ1-L-B-SSS-1	3	0	¼	3.2	440 (200)	84 x 24⅞ x 34¾	2134 x 631 x 881
TDR92-RISZ1-L-B-SSSS-1	4	0	¼	3.2	475 (215)	92 x 24⅞ x 34¾	2337 x 631 x 881
TDR108-RISZ1-L-B-SSSS-1	4	0	¼	3.2	535 (243)	108 x 24⅞ x 34¾	2744 x 631 x 881
<b>COMBO SOLID &amp; GLASS SWING DOORS, LEFT SIDE REFRIGERATION SYSTEM</b>							
TDR48-RISZ1-L-B-SG-1	2	3	½	1.8	320 (146)	48 x 24⅞ x 34¾	1219 x 631 x 881
TDR52-RISZ1-L-B-SG-1	2	3	½	1.8	365 (166)	52 x 24⅞ x 34¾	1321 x 631 x 881

† Depth does not include 1½" (39mm) for swing door handles.

\* Height does not include 15¾" (400mm) for draft tower.

## TDR™ DRAFT REFRIGERATION PASS-THRU, BLACK EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS &amp; LEFT SIDE REFRIGERATION SYSTEM</b>							
TDR36-PTSZ1-L-B-S-S-1	2	0	½	1.8	270 (122)	36 x 24⅞ x 34¾	914 x 631 x 881
TDR60-PTSZ1-L-B-SS-SS-1	4	0	¼	3.2	365 (166)	60 x 24⅞ x 34¾	1524 x 631 x 881
TDR84-PTSZ1-L-B-SSS-SSS-1	6	0	¼	3.2	490 (222)	84 x 24⅞ x 34¾	2134 x 631 x 881

† Depth does not include 1½" (39mm) for swing door handles.

\* Height does not include 15¾" (400mm) for draft tower.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



## DRAFT REFRIGERATION REACH-IN & PASS-THRU, STAINLESS EXTERIOR *Solid & Glass, Swing Doors*



**TDR48-RISZ1-L-S-SG-1**



**TDR36-RISZ1-L-S-S-1**



**TDR52-RISZ1-L-S-SG-1**



**TDR72-RISZ1-L-S-SSS-1**



**TDR92-RISZ1-L-S-SSSS-1**

## Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
  - Exterior - Black, powder coated cold-rolled steel with stainless steel countertop.
  - Interior - stainless steel floor and sides.
  - Insulated and chilled draft columns.
  - Fan motors direct large volume of cold air into draft columns.
  - White LED Interior Lighting for excellent visibility. (optional 14-color TruLumina® on glass and solid door combos)
  - NSF/ANSI Standard 7 compliant for packaged and bottled product.
  - Zero clearance recessed plug and front breathing.
  - 24" (610mm) depth makes for easy placement in tight areas. Conserves valuable work space.
  - Positive seal doors.
  - Each cabinet designed to accommodate a variety of beer kegs. See keg brochure on website for details.
  - Leg levelers standard with 7 other castor/leg options for various heights.
  - Three (3) interior access ports.
  - All TDR models also available in right side compressor versions.
- Glass door models only...**
- Shelves included.
  - Energy efficient, "Low-E", thermal glass doors.
  - 14-color TruLumina® lighting standard.
- Pass-Thru models only...**
- Designed for convenient front and rear access for serving.



## TDR™ DRAFT REFRIGERATION REACH-IN, STAINLESS EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS &amp; LEFT SIDE REFRIGERATION SYSTEM</b>							
TDR32-RISZ1-L-S-S-1	1	0	½	1.8	240 (109)	32 x 24⅞ x 34¾	813 x 631 x 881
TDR36-RISZ1-L-S-S-1	1	0	½	1.8	270 (123)	36 x 24⅞ x 34¾	914 x 631 x 881
TDR48-RISZ1-L-S-SS-1	2	0	½	1.8	320 (146)	48 x 24⅞ x 34¾	1219 x 631 x 881
TDR52-RISZ1-L-S-SS-1	2	0	½	1.8	355 (161)	52 x 24⅞ x 34¾	1321 x 631 x 881
TDR60-RISZ1-L-S-SS-1	2	0	¼	3.2	330 (150)	60 x 24⅞ x 34¾	1524 x 631 x 881
TDR72-RISZ1-L-S-SSS-1	3	0	¼	3.2	395 (179)	72 x 24⅞ x 34¾	1829 x 631 x 881
TDR84-RISZ1-L-S-SSS-1	3	0	¼	3.2	440 (200)	84 x 24⅞ x 34¾	2134 x 631 x 881
TDR92-RISZ1-L-S-SSSS-1	4	0	¼	3.2	475 (215)	92 x 24⅞ x 34¾	2337 x 631 x 881
TDR108-RISZ1-L-S-SSSS-1	4	0	¼	3.2	535 (243)	108 x 24⅞ x 34¾	2744 x 631 x 881
<b>COMBO SOLID &amp; GLASS SWING DOORS, LEFT SIDE REFRIGERATION SYSTEM</b>							
TDR48-RISZ1-L-S-SG-1	2	3	½	1.8	330 (150)	48 x 24⅞ x 34¾	1219 x 631 x 881
TDR52-RISZ1-L-S-SG-1	2	3	½	1.8	365 (166)	52 x 24⅞ x 34¾	1321 x 631 x 881

† Depth does not include 1½" (39mm) for swing door handles.

\* Height does not include 15¾" (400mm) for draft tower.

## TDR™ DRAFT REFRIGERATION PASS-THRU, STAINLESS EXTERIOR

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID SWING DOORS &amp; LEFT SIDE REFRIGERATION SYSTEM</b>							
TDR36-PTSZ1-L-S-S-S-1	2	0	½	1.8	270 (122)	36 x 24⅞ x 34¾	914 x 631 x 881
TDR60-PTSZ1-L-S-SS-SS-1	4	0	¼	3.2	365 (166)	60 x 24⅞ x 34¾	1524 x 631 x 881
TDR84-PTSZ1-L-S-SSS-SSS-1	6	0	¼	3.2	490 (222)	84 x 24⅞ x 34¾	2134 x 631 x 881

† Depth does not include 1½" (39mm) for swing door handles.

\* Height does not include 15¾" (400mm) for draft tower.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



All dimensions are rounded up to the nearest 1/8" (whole millimeter) | Specifications subject to change without notice.

## DIRECT DRAW BEER DISPENSERS, BLACK & STAINLESS EXTERIORS

### Solid Swing Doors



TDD-1-HC



TDD-3-HC



TDD-3CT-HC



TDD-4-S-HC

## Features/Benefits

- Provides ice cold products 33°F to 38°F (0.5°C to 3.3°C) (normal ambient conditions).
- Exterior - Black, powder coated cold-rolled steel with stainless steel countertop.
- Interior - Stainless steel floor with ½" (13mm) lip & heavy galvanized steel walls.
- Insulated and chilled draft columns.
- LED interior lighting.
- NSF/ANSI Standard 7 compliant for open food product.
- Air vents on side to maximize flow of fresh air through condenser.
- Positive seal doors.
- Self-contained system.
- Each cabinet designed to accommodate a variety of beer kegs. See keg brochure on website for details.

- Available with optional legs or 2½" (64mm) or 4" (102mm) diameter castors (TDD-1-HC/1-S-HC: 4" (102mm) diameter castors standard equipment; 2½" (64mm) diameter castors & legs not available).

### Club-Top models have...

- One, 3/8" (10mm) easy to reach, heavy-duty, black PVC-coated wire refrigerated storage shelf for chilled beer or wine glasses.
- Anodized aluminum glass rail provides convenient storage area for glasses on top.
- Convenient easy-glide lid.
- Flip-lock to secure stainless steel lid.

### Stainless Steel models have...

- Stainless steel exterior and countertop for those who appreciate the value of stainless.



## TDD™ DIRECT DRAW BEER DISPENSERS, STAINLESS TOP, BLACK EXTERIOR

Model	# of Doors	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID SWING DOORS						
TDD-1-HC	1	1/10	1.4	205 (93)	23½ x 31¼ x 39¾	597 x 794 x 1010
TDD-2-HC	2	¼	2.8	330 (150)	58⅞ x 27⅞ x 37	1496 x 689 x 940
TDD-3-HC	2	¼	2.8	365 (166)	69⅞ x 27⅞ x 37	1756 x 689 x 940
TDD-4-HC	3	¼	2.8	445 (225)	90⅝ x 27⅞ x 37	2296 x 689 x 940

† Depth does not include 1" (26mm) for rear bumpers (excludes TDD-1-HC).

\* Height does not include 15¼" (388mm) for draft arm.

## TDD™ DIRECT DRAW BEER DISPENSERS, STAINLESS EXTERIOR

Model	# of Doors	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID SWING DOORS						
TDD-1-S-HC	1	1/10	1.4	215 (98)	23½ x 31¼ x 39¾	597 x 794 x 1010
TDD-2-S-HC	2	¼	2.8	330 (150)	58⅞ x 27⅞ x 37	1496 x 689 x 940
TDD-3-S-HC	2	¼	2.8	360 (164)	69⅞ x 27⅞ x 37	1756 x 689 x 940
TDD-4-S-HC	3	¼	2.8	405 (184)	90⅝ x 27⅞ x 37	2296 x 689 x 940

† Depth does not include 1" (26mm) for rear bumpers (excludes TDD-1-S-HC).

\* Height does not include 15¼" (388mm) for draft arm.

## TDD™ CLUB-TOP DIRECT DRAW BEER DISPENSERS, STAINLESS TOP, BLACK EXTERIOR

Model	# of Doors	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID SWING DOORS						
TDD-2CT-HC	2	¼	2.8	350 (159)	58⅞ x 27⅞ x 38½	1496 x 689 x 940
TDD-3CT-HC	2	¼	2.8	385 (175)	69⅞ x 27⅞ x 38½	1756 x 689 x 940
TDD-4CT-HC	3	¼	2.8	465 (211)	90⅝ x 27⅞ x 38½	2296 x 689 x 940

† Depth does not include 1" (26mm) for rear bumpers.

\* Height does not include 13¾" (350mm) for draft arm.

## TDD™ CLUB-TOP DIRECT DRAW BEER DISPENSERS, STAINLESS TOP, STAINLESS EXTERIOR

Model	# of Doors	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
SOLID SWING DOORS						
TDD-2CT-S-HC	2	¼	2.8	350 (159)	58⅞ x 27⅞ x 38½	1496 x 689 x 940
TDD-3CT-S-HC	2	¼	2.8	385 (175)	69⅞ x 27⅞ x 38½	1756 x 689 x 940
TDD-4CT-S-HC	3	¼	2.8	485 (220)	90⅝ x 27⅞ x 38½	2296 x 689 x 940

† Depth does not include 1" (26mm) for rear bumpers.

\* Height does not include 13¾" (350mm) for draft arm.

## TDD™ NITRO KIT MODELS

Sold Separately. See "accessories" section for additional individual nomenclature.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



## HORIZONTAL BOTTLE COOLERS - DEEP WELL & GLASS & PLATE CHILLERS/FROSTERS

*Solid Slide Lids*

Heavy-duty 3/8" (10mm) thick pure grade PVC-coated adjustable bin dividers for maximum storage use



Heavy-duty PVC-coated wire shelves for maximum flexibility



Huge capacity requires minimum floor space



Largest storage capacity in the industry - meets supply and demand requirements during peak hours

**TD-36-12-HC**

**T-36-GC-S-HC**



TD-24-7-HC



TD-50-18-S-HC



TD-80-30-HC



T-36-GC-HC



T-50-GC-S-HC

## Features/Benefits

### Horizontal Bottle Coolers - Deep Well

- Provides ice cold products 33°F to 38°F (0.5°C to 3.3°C) – very fast pull-down capacity.
- Positive guided, forced air cooling - cools bottles on top first.
- Exterior - Black, powder coated cold-rolled steel with stainless steel countertop and lids.
- Interior - long lasting heavy-duty galvanized steel. Complies with NSF/ANSI Standard 7 for packaged and bottled product.
- LED interior lighting.
- Huge capacity requires minimum floor space.
- Rugged, removable, bottle cap opener and cap catcher included. Field installed.
- Self-contained system.
- Available with optional 6" (153mm) legs or 3" (77mm) or 2½" (64mm) diameter castors.

### Glass & Plate Chillers/Frosters

- Save time - load glasses dry and frost even faster with temperature 0°F (-17.8°C) and below.
  - Exterior - Black, powder coated cold-rolled steel with stainless steel countertop and lids.
  - Interior - long lasting heavy-duty galvanized steel.
  - Listed under NSF/ANSI standard 7 for the storage and/or display of packaged or bottled product..
  - Automatic defrost system time-initiated, time-terminated.
  - Self-contained system.
  - Available with optional legs or 3" (77mm) or 2½" (64mm) diameter castors.
  - Available with optional ratchet locks for added security.
- Stainless Steel models have...**
- Stainless steel exterior and countertop for those who appreciate the value of stainless.



## TD™ HORIZONTAL BOTTLE COOLERS - DEEP WELL

Model	# of Lids	# of Dividers	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>BLACK EXTERIOR</b>							
TD-24-7-HC	1	2	1/10	1.4	180 (82)	24½ x 26¾ x 33½	623 x 683 x 850
TD-36-12-HC	1	2	1/10	1.4	230 (105)	36¾ x 26¾ x 33½	931 x 683 x 850
TD-50-18-HC	2	3	1/5	1.9	280 (128)	49½ x 26¾ x 33½	1255 x 683 x 850
TD-65-24-HC	2	4	1/5	1.9	370 (168)	64½ x 26¾ x 33½	1636 x 683 x 850
TD-80-30-HC	3	6	1/4	2.8	415 (188)	80½ x 26¾ x 33½	2035 x 683 x 850
TD-95-38-HC	3	7	1/4	3.1	480 (218)	95½ x 26¾ x 33½	2416 x 683 x 850
<b>STAINLESS EXTERIOR</b>							
TD-24-7-S-HC	1	2	1/10	1.4	180 (82)	24½ x 26¾ x 33½	623 x 683 x 850
TD-36-12-S-HC	1	2	1/10	1.4	225 (103)	36¾ x 26¾ x 33¾	934 x 677 x 848
TD-50-18-S-HC	2	3	1/5	1.9	280 (128)	49¾ x 26¾ x 33¾	1261 x 677 x 848
TD-65-24-S-HC	2	4	1/5	1.9	370 (168)	64¾ x 26¾ x 33¾	1642 x 677 x 848
TD-80-30-S-HC	3	6	1/4	2.8	415 (189)	80½ x 26¾ x 33½	2035 x 683 x 850
TD-95-38-S-HC	3	7	1/4	3.1	470 (214)	95¾ x 26¾ x 33¾	2423 x 677 x 848

† Depth does not include 1½" (39mm) for cap catcher or 1" (26mm) for rear bumpers.  
 note: 12 oz. bottles refers to 12 oz. longneck bottles.

## T-GC™ GLASS & PLATE CHILLERS/FROSTERS

Model	# of Lids	# of Dividers	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>BLACK EXTERIOR</b>							
T-24-GC-HC	1	3	1/5	2.3	180 (82)	24½ x 26¾ x 33½	623 x 683 x 850
T-36-GC-HC	1	3	1/4	2.3	240 (109)	36¾ x 26¾ x 33¾	934 x 677 x 848
T-50-GC-HC	2	5	1/3	3.5	290 (132)	49¾ x 26¾ x 33¾	1261 x 677 x 848
<b>STAINLESS EXTERIOR</b>							
T-24-GC-S-HC	1	3	1/5	2.3	185 (84)	24½ x 26¾ x 33½	623 x 683 x 850
T-36-GC-S-HC	1	3	1/4	2.3	245 (112)	36¾ x 26¾ x 33¾	934 x 677 x 848
T-50-GC-S-HC	2	5	1/3	3.5	290 (132)	49¾ x 26¾ x 33¾	1261 x 677 x 848

† Depth does not include 1" (26mm) for rear bumpers.

## T-GC™ GLASS LID OPTIONS

Model
GLASS LIDS "GLID"
TD-24-7-HC
TD-36-12-HC
TD-50-18-HC
TD-65-24-HC
TD-80-30-HC
TD-95-38-HC

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



All dimensions are rounded up to the nearest 1/8" (whole millimeter) | Specifications subject to change without notice.

# Bar Refrigeration | Capacities

## BAR REFRIGERATION CAN/BOTTLE/BARREL CAPACITY

Model	Capacity (12oz. Cans)	Capacity (12oz. Bottles)	Capacity (Barrels)
<b>TBR - REACH-IN, BLACK EXTERIOR</b>			
TBR32-RISZ1-L-B-S-1	38 - 6pk.12oz.	21 - 6pk.12oz.	2 - 1/6
TBR36-RISZ1-L-B-S-1	44 - 6pk.12oz.	27 - 6pk.12oz.	4 - 1/6
TBR48-RISZ1-L-B-SS-1	76 - 6pk.12oz.	43 - 6pk.12oz.	6 - 1/6
TBR52-RISZ1-L-B-SS-1	78 - 6pk.12oz.	49 - 6pk.12oz.	2 - 1/2
TBR60-RISZ1-L-B-SS-1	101 - 6pk.12oz.	63 - 6pk.12oz.	2 - 1/2
TBR72-RISZ1-L-B-SSS-1	125 - 6pk.12oz.	78 - 6pk.12oz.	3 - 1/2
TBR84-RISZ1-L-B-SSS-1	164 - 6pk.12oz.	96 - 6pk.12oz.	3 - 1/2
TBR92-RISZ1-L-B-SSSS-1	182 - 6pk.12oz.	108 - 6pk.12oz.	4 - 1/2
TBR108-RISZ1-L-B-SSSS-1	220 - 6pk.12oz.	132 - 6pk.12oz.	4 - 1/2
TBR32-RISZ1-L-B-G-1	38 - 6pk.12oz.	21 - 6pk.12oz.	2 - 1/6
TBR36-RISZ1-L-B-G-1	44 - 6pk.12oz.	27 - 6pk.12oz.	4 - 1/6
TBR48-RISZ1-L-B-GG-1	76 - 6pk.12oz.	43 - 6pk.12oz.	6 - 1/6
TBR52-RISZ1-L-B-GG-1	78 - 6pk.12oz.	49 - 6pk.12oz.	2 - 1/2
TBR60-RISZ1-L-B-GG-1	101 - 6pk.12oz.	63 - 6pk.12oz.	2 - 1/2
TBR72-RISZ1-L-B-GGG-1	125 - 6pk.12oz.	78 - 6pk.12oz.	3 - 1/2
TBR84-RISZ1-L-B-GGG-1	164 - 6pk.12oz.	96 - 6pk.12oz.	3 - 1/2
TBR92-RISZ1-L-B-GGGG-1	182 - 6pk.12oz.	108 - 6pk.12oz.	4 - 1/2
TBR108-RISZ1-L-B-GGGG-1	220 - 6pk.12oz.	132 - 6pk.12oz.	4 - 1/2
TBR48-RISZ1-L-B-11-1	68 - 6pk.12oz.	43 - 6pk.12oz.	5 - 1/6
TBR52-RISZ1-L-B-11-1	78 - 6pk.12oz.	48 - 6pk.12oz.	2 - 1/2
TBR60-RISZ1-L-B-11-1	100 - 6pk.12oz.	59 - 6pk.12oz.	2 - 1/2
TBR72-RISZ1-L-B-111-1	120 - 6pk.12oz.	73 - 6pk.12oz.	3 - 1/2
<b>TBR - PASS-THRU, BLACK EXTERIOR</b>			
TBR36-PTSZ1-L-B-S-S-1	38 - 6pk.12oz.	25 - 6pk.12oz.	6 - 1/6
TBR60-PTSZ1-L-B-SS-SS-1	89 - 6pk.12oz.	57 - 6pk.12oz.	2 - 1/2
TBR84-PTSZ1-L-B-SSS-SSS-1	164 - 6pk.12oz.	88 - 6pk.12oz.	3 - 1/2
TBR36-PTSZ1-L-B-G-G-1	38 - 6pk.12oz.	25 - 6pk.12oz.	6 - 1/6
TBR60-PTSZ1-L-B-GG-GG-1	89 - 6pk.12oz.	57 - 6pk.12oz.	2 - 1/2
TBR84-PTSZ1-L-B-GGG-GGG-1	164 - 6pk.12oz.	88 - 6pk.12oz.	3 - 1/2
TBR60-PTSZ1-L-B-11-11-1	88 - 6pk.12oz.	54 - 6pk.12oz.	2 - 1/2
<b>TBR - REACH-IN, STAINLESS EXTERIOR</b>			
TBR32-RISZ1-L-S-S-1	38 - 6pk.12oz.	21 - 6pk.12oz.	2 - 1/6
TBR36-RISZ1-L-S-S-1	44 - 6pk.12oz.	27 - 6pk.12oz.	4 - 1/6
TBR48-RISZ1-L-S-SS-1	76 - 6pk.12oz.	43 - 6pk.12oz.	6 - 1/6
TBR52-RISZ1-L-S-SS-1	78 - 6pk.12oz.	49 - 6pk.12oz.	2 - 1/2
TBR60-RISZ1-L-S-SS-1	101 - 6pk.12oz.	63 - 6pk.12oz.	2 - 1/2
TBR72-RISZ1-L-S-SSS-1	125 - 6pk.12oz.	78 - 6pk.12oz.	3 - 1/2
TBR84-RISZ1-L-S-SSS-1	164 - 6pk.12oz.	96 - 6pk.12oz.	3 - 1/2
TBR92-RISZ1-L-S-SSSS-1	182 - 6pk.12oz.	108 - 6pk.12oz.	4 - 1/2
TBR108-RISZ1-L-S-SSSS-1	220 - 6pk.12oz.	132 - 6pk.12oz.	4 - 1/2
TBR32-RISZ1-L-S-G-1	38 - 6pk.12oz.	21 - 6pk.12oz.	2 - 1/6
TBR36-RISZ1-L-S-G-1	44 - 6pk.12oz.	27 - 6pk.12oz.	4 - 1/6
TBR48-RISZ1-L-S-GG-1	76 - 6pk.12oz.	43 - 6pk.12oz.	6 - 1/6
TBR52-RISZ1-L-S-GG-1	78 - 6pk.12oz.	49 - 6pk.12oz.	2 - 1/2
TBR60-RISZ1-L-S-GG-1	101 - 6pk.12oz.	63 - 6pk.12oz.	2 - 1/2
TBR72-RISZ1-L-S-GGG-1	125 - 6pk.12oz.	78 - 6pk.12oz.	3 - 1/2
TBR84-RISZ1-L-S-GGG-1	164 - 6pk.12oz.	96 - 6pk.12oz.	3 - 1/2
TBR92-RISZ1-L-S-GGGG-1	182 - 6pk.12oz.	108 - 6pk.12oz.	4 - 1/2
TBR108-RISZ1-L-S-GGGG-1	220 - 6pk.12oz.	132 - 6pk.12oz.	4 - 1/2

note: 12 oz. bottles refers to 12 oz. longneck bottles.

Model	Capacity (12oz. Cans)	Capacity (12oz. Bottles)	Capacity (Barrels)
<b>TBR - REACH-IN, STAINLESS EXTERIOR (CONT.)</b>			
TBR48-RISZ1-L-S-11-1	68 - 6pk.12oz.	43 - 6pk.12oz.	5 - 1/6
TBR52-RISZ1-L-S-11-1	78 - 6pk.12oz.	48 - 6pk.12oz.	2 - 1/2
TBR60-RISZ1-L-S-11-1	100 - 6pk.12oz.	59 - 6pk.12oz.	2 - 1/2
TBR72-RISZ1-L-S-111-1	120 - 6pk.12oz.	73 - 6pk.12oz.	3 - 1/2
<b>TBR - PASS THRU, STAINLESS EXTERIOR</b>			
TBR36-PTSZ1-L-S-S-S-1	38 - 6pk.12oz.	25 - 6pk.12oz.	6 - 1/6
TBR60-PTSZ1-L-S-SS-SS-1	89 - 6pk.12oz.	57 - 6pk.12oz.	2 - 1/2
TBR84-PTSZ1-L-S-SSS-SSS-1	164 - 6pk.12oz.	88 - 6pk.12oz.	3 - 1/2
TBR36-PTSZ1-L-S-G-G-1	38 - 6pk.12oz.	25 - 6pk.12oz.	6 - 1/6
TBR60-PTSZ1-L-S-GG-GG-1	89 - 6pk.12oz.	57 - 6pk.12oz.	2 - 1/2
TBR84-PTSZ1-L-S-GGG-GGG-1	164 - 6pk.12oz.	88 - 6pk.12oz.	3 - 1/2
TBR60-PTSZ1-L-S-11-11-1	88 - 6pk.12oz.	54 - 6pk.12oz.	2 - 1/2
<b>TDR - REACH-IN, BLACK EXTERIOR</b>			
TDR32-RISZ1-L-B-S-1	38 - 6pk.12oz.	21 - 6pk.12oz.	2 - 1/6
TDR36-RISZ1-L-B-S-1	44 - 6pk.12oz.	27 - 6pk.12oz.	4 - 1/6
TDR48-RISZ1-L-B-SS-1	76 - 6pk.12oz.	43 - 6pk.12oz.	6 - 1/6
TDR52-RISZ1-L-B-SS-1	78 - 6pk.12oz.	49 - 6pk.12oz.	2 - 1/2
TDR60-RISZ1-L-B-SS-1	101 - 6pk.12oz.	63 - 6pk.12oz.	2 - 1/2
TDR72-RISZ1-L-B-SSS-1	125 - 6pk.12oz.	78 - 6pk.12oz.	2 - 1/2
TDR84-RISZ1-L-B-SSS-1	164 - 6pk.12oz.	96 - 6pk.12oz.	2 - 1/2
TDR92-RISZ1-L-B-SSSS-1	182 - 6pk.12oz.	108 - 6pk.12oz.	2 - 1/2
TDR108-RISZ1-L-B-SSSS-1	220 - 6pk.12oz.	132 - 6pk.12oz.	2 - 1/2
TDR48-RISZ1-L-B-SG-1	38 - 6pk.12oz.	21 - 6pk.12oz.	3 - 1/6
TDR52-RISZ1-L-B-SG-1	38 - 6pk.12oz.	24 - 6pk.12oz.	2 - 1/2
<b>TDR - PASS-THRU, BLACK EXTERIOR</b>			
TDR36-PTSZ1-L-B-S-S-1	38 - 6pk.12oz.	25 - 6pk.12oz.	6 - 1/6
TDR60-PTSZ1-L-B-SS-SS-1	89 - 6pk.12oz.	57 - 6pk.12oz.	2 - 1/2
TDR84-PTSZ1-L-B-SSS-SSS-1	164 - 6pk.12oz.	88 - 6pk.12oz.	6 - 1/2
<b>TDR - REACH-IN, STAINLESS EXTERIOR</b>			
TDR32-RISZ1-L-S-S-1	38 - 6pk.12oz.	21 - 6pk.12oz.	2 - 1/6
TDR36-RISZ1-L-S-S-1	44 - 6pk.12oz.	27 - 6pk.12oz.	4 - 1/6
TDR48-RISZ1-L-S-SS-1	76 - 6pk.12oz.	43 - 6pk.12oz.	6 - 1/6
TDR52-RISZ1-L-S-SS-1	78 - 6pk.12oz.	49 - 6pk.12oz.	2 - 1/2
TDR60-RISZ1-L-S-SS-1	101 - 6pk.12oz.	63 - 6pk.12oz.	2 - 1/2
TDR72-RISZ1-L-S-SSS-1	125 - 6pk.12oz.	78 - 6pk.12oz.	2 - 1/2
TDR84-RISZ1-L-S-SSS-1	164 - 6pk.12oz.	96 - 6pk.12oz.	2 - 1/2
TDR92-RISZ1-L-S-SSSS-1	182 - 6pk.12oz.	108 - 6pk.12oz.	2 - 1/2
TDR108-RISZ1-L-S-SSSS-1	220 - 6pk.12oz.	132 - 6pk.12oz.	2 - 1/2
TDR48-RISZ1-L-S-SG-1	38 - 6pk.12oz.	21 - 6pk.12oz.	3 - 1/6
TDR52-RISZ1-L-S-SG-1	38 - 6pk.12oz.	24 - 6pk.12oz.	2 - 1/2
<b>TDR - PASS-THRU, STAINLESS EXTERIOR</b>			
TDR36-PTSZ1-L-S-S-S-1	38 - 6pk.12oz.	25 - 6pk.12oz.	6 - 1/6
TDR60-PTSZ1-L-S-SS-SS-1	89 - 6pk.12oz.	57 - 6pk.12oz.	2 - 1/2
TDR84-PTSZ1-L-S-SSS-SSS-1	164 - 6pk.12oz.	88 - 6pk.12oz.	6 - 1/2
<b>TBB - REACH-IN, STAINLESS TOP, BLACK EXTERIOR</b>			
TBB-1-HC	30 6-pks12oz.	-	1 - 1/2
TBB-2-HC	88 6-pks12oz.	-	2 - 1/2
TBB-3-HC	112 6-pks12oz.	-	3 - 1/2
TBB-4-HC	152 6-pks12oz.	-	4 - 1/2

note: 12 oz. bottles refers to 12 oz. longneck bottles.

Model	Capacity (12oz. Cans)	Capacity (12oz. Bottles)	Capacity (Barrels)
<b>TBB - REACH-IN, STAINLESS TOP, BLACK EXTERIOR</b>			
TBB-2G-HC-LD	88 6-pks.12oz.	-	2 - 1/2
TBB-3G-HC-LD	112 6-pks.12oz.	-	3 - 1/2
TBB-4G-HC-LD	152 6-pks.12oz.	-	4 - 1/2
<b>TBB - PASS-THRU, STAINLESS TOP, BLACK EXTERIOR</b>			
TBB-4PT	152 6-pks.12oz.	-	4 - 1/2
<b>TBB - REACH-IN, STAINLESS TOP, STAINLESS EXTERIOR</b>			
TBB-1-S-HC	30 6-pks.12oz.	-	1 - 1/2
TBB-2-S-HC	88 6-pks.12oz.	-	2 - 1/2
TBB-3-S-HC	112 6-pks.12oz.	-	3 - 1/2
TBB-4-S-HC	152 6-pks.12oz.	-	4 - 1/2
TBB-2G-S-HC-LD	88 6-pks.12oz.	-	2 - 1/2
TBB-3G-S-HC-LD	112 6-pks.12oz.	-	3 - 1/2
TBB-4G-S-HC-LD	152 6-pks.12oz.	-	4 - 1/2
<b>TBB - PASS-THRU, STAINLESS TOP, STAINLESS EXTERIOR</b>			
TBB-4PT-S	152 6-pks.12oz.	-	4 - 1/2
<b>TBB24 - 24" (610MM) REACH-IN, STAINLESS TOP, STAINLESS EXTERIOR</b>			
TBB24-48-2S-Z1-SFT-B-1	76 6-pks.12oz.	43 6-pks.12oz.	6 - 1/6
TBB24-60-2S-Z1-SFT-B-1	89 6-pks.12oz.	57 6-pks.12oz.	2 - 1/2
TBB24-72-3S-Z1-SFT-B-1	125 6-pks.12oz.	78 6-pks.12oz.	3 - 1/2
TBB24-48-2G-Z1-SFT-B-1	76 6-pks.12oz.	43 6-pks.12oz.	6 - 1/6
TBB24-60-2G-Z1-SFT-B-1	89 6-pks.12oz.	57 6-pks.12oz.	2 - 1/2
TBB24-72-3G-Z1-SFT-B-1	125 6-pks.12oz.	78 6-pks.12oz.	3 - 1/2
<b>TBB24 - 24" (610MM) REACH-IN, STAINLESS TOP, STAINLESS EXTERIOR</b>			
TBB24-48-2S-Z1-SFT-S-1	76 6-pks.12oz.	43 6-pks.12oz.	6 - 1/6
TBB24-60-2S-Z1-SFT-S-1	89 6-pks.12oz.	57 6-pks.12oz.	2 - 1/2
TBB24-72-3S-Z1-SFT-S-1	125 6-pks.12oz.	78 6-pks.12oz.	3 - 1/2
TBB24-48-2G-Z1-SFT-S-1	76 6-pks.12oz.	43 6-pks.12oz.	6 - 1/6
TBB24-60-2G-Z1-SFT-S-1	89 6-pks.12oz.	57 6-pks.12oz.	2 - 1/2
TBB24-72-3G-Z1-SFT-S-1	125 6-pks.12oz.	78 6-pks.12oz.	3 - 1/2
<b>TBB24 - 24" (610MM) REACH-IN, BLACK SUB-TOP, BLACK EXTERIOR</b>			
TBB24-48-2S-Z1-BST-B-1	76 6-pks.12oz.	43 6-pks.12oz.	6 - 1/6
TBB24-60-2S-Z1-BST-B-1	89 6-pks.12oz.	57 6-pks.12oz.	2 - 1/2
TBB24-72-3S-Z1-BST-B-1	125 6-pks.12oz.	78 6-pks.12oz.	3 - 1/2
TBB24-48-2G-Z1-BST-B-1	76 6-pks.12oz.	43 6-pks.12oz.	6 - 1/6
TBB24-60-2G-Z1-BST-B-1	89 6-pks.12oz.	57 6-pks.12oz.	2 - 1/2
TBB24-72-3G-Z1-BST-B-1	125 6-pks.12oz.	78 6-pks.12oz.	3 - 1/2
<b>TBB24 - 24" (610MM) REACH-IN, BLACK SUB-TOP, STAINLESS EXTERIOR</b>			
TBB24-48-2S-Z1-BST-S-1	76 6-pks.12oz.	43 6-pks.12oz.	6 - 1/6
TBB24-60-2S-Z1-BST-S-1	89 6-pks.12oz.	57 6-pks.12oz.	2 - 1/2
TBB24-72-3S-Z1-BST-S-1	125 6-pks.12oz.	78 6-pks.12oz.	3 - 1/2
TBB24-48-2G-Z1-BST-S-1	76 6-pks.12oz.	43 6-pks.12oz.	6 - 1/6
TBB24-60-2G-Z1-BST-S-1	89 6-pks.12oz.	57 6-pks.12oz.	2 - 1/2
TBB24-72-3G-Z1-BST-S-1	125 6-pks.12oz.	78 6-pks.12oz.	3 - 1/2
<b>TDD - STAINLESS TOP, BLACK EXTERIOR</b>			
TDD-1-HC	-	-	1 - 1/2
TDD-2-HC	-	-	2 - 1/2
TDD-3-HC	-	-	3 - 1/2
TDD-4-HC	-	-	4 - 1/2

note: 12 oz. bottles refers to 12 oz. longneck bottles.

Model	Capacity (12oz. Cans)	Capacity (12oz. Bottles)	Capacity (Barrels)
<b>TDD - STAINLESS EXTERIOR</b>			
TDD-1-S-HC	-	-	1 - 1/2
TDD-2-S-HC	-	-	2 - 1/2
TDD-3-S-HC	-	-	3 - 1/2
TDD-4-S-HC	-	-	4 - 1/2
<b>TDD - CLUB-TOP, STAINLESS TOP, BLACK EXTERIOR</b>			
TDD-2CT-HC	-	-	2 - 1/2
TDD-3CT-HC	-	-	3 - 1/2
TDD-4CT-HC	-	-	4 - 1/2
<b>TDD - CLUB-TOP, STAINLESS TOP, STAINLESS EXTERIOR</b>			
TDD-2CT-S-HC	-	-	2 - 1/2
TDD-3CT-S-HC	-	-	3 - 1/2
TDD-4CT-S-HC	-	-	4 - 1/2
<b>TD - HORIZONTAL BOTTLE COOLER - DEEP WELL</b>			
TD-24-7-HC	6 Cases	4.5 Cases	-
TD-36-12-HC	14.5 Cases	11 Cases	-
TD-50-18-HC	24 Cases	16.5 Cases	-
TD-65-24-HC	32.5 Cases	22 Cases	-
TD-80-30-HC	42 Cases	30 Cases	-
TD-95-38-HC	55 Cases	37.5 Cases	-
TD-24-7-S-HC	6 Cases	4.5 Cases	-
TD-36-12-S-HC	14.5 Cases	11 Cases	-
TD-50-18-S-HC	24 Cases	16.5 Cases	-
TD-65-24-S-HC	32.5 Cases	22 Cases	-
TD-80-30-S-HC	42 Cases	30 Cases	-
TD-95-38-S-HC	55 Cases	37.5 Cases	-
<b>T-GC - GLASS &amp; PLATE CHILLERS/FROSTERS</b>			
T-24-GC-HC	85	90	-
T-36-GC-HC	172	180	-
T-50-GC-HC	240	250	-
T-24-GC-S-HC	85	90	-
T-36-GC-S-HC	172	180	-
T-50-GC-S-HC	240	250	-


note: 12 oz. bottles refers to 12 oz. longneck bottles.



# Bar Refrigeration | Keg Configurations

## TBB®/TDD™ KEG CONFIGURATIONS

### Common Draft Beer Keg Footprints

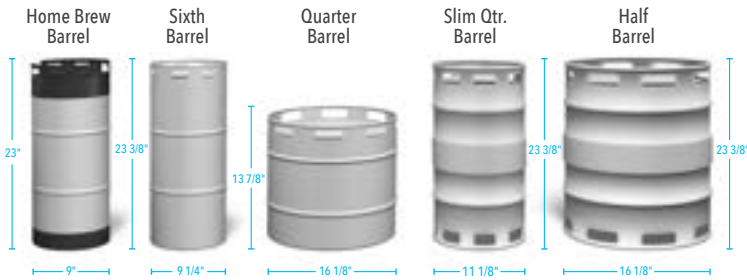


\*Above dimensions may vary slightly as a result of differences between keg manufacturers.

### DRAFT BEER KEG SPECIFICATIONS\*

Size	Home Brew Barrel	Sixth Barrel	Quarter Barrel	Slim Quarter Barrel	Half Barrel
Gallons	5.00	5.16	7.75	7.75	15.50
Ounces	640	611	992	992	1984
# of 12 oz. Beers	53	55	82	82	165
Weight (Full)	49 lbs.	58 lbs.	87 lbs.	87 lbs.	161 lbs.


### TBB/TDD-1\*

19-3/4" interior width X 24-9/32" interior depth

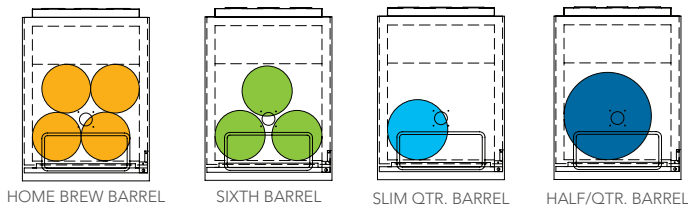


### TBB/TDD-2\*

43" interior width X 22" interior depth

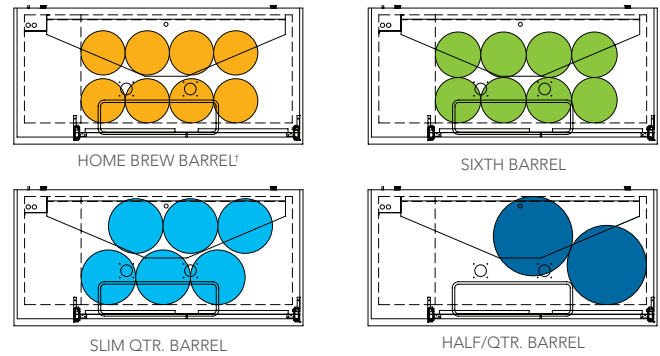


### TBB/TDD-3\*

53-1/4" interior width X 22" interior depth

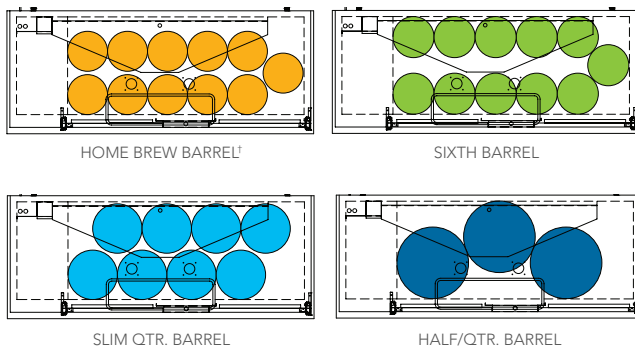

### TBB/TDD-4\*

72-1/4" interior width X 22" interior depth

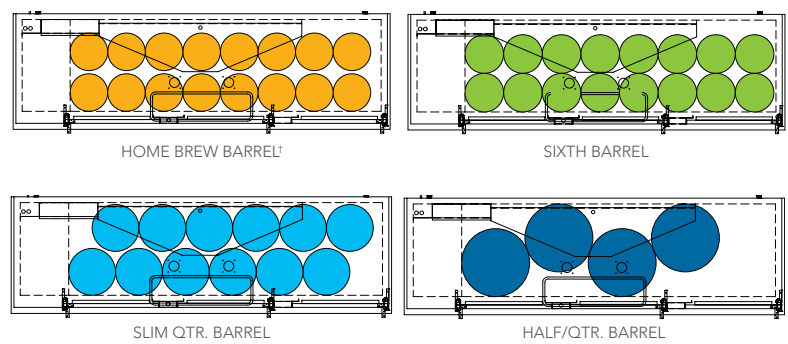

● Half/Quarter Barrel ● Slim Quarter Barrel ● Sixth Barrel ● Home Brew Barrel

\* Top view shown. Please consult your beer distributor for specific sizes.  
†25-25/32" usable interior height.







# TBB<sup>®</sup>24 KEG CONFIGURATIONS

## Common Draft Beer Keg Footprints





### TBB24-48\*

36-5/16" interior width X 18-3/4" interior depth







### TBB24-60\*

48-5/16" interior width X 18-3/4" interior depth



### TBB24-72\*

60-5/16" interior width X 18-3/4" interior depth

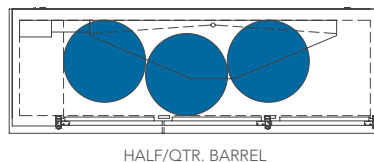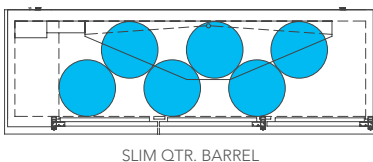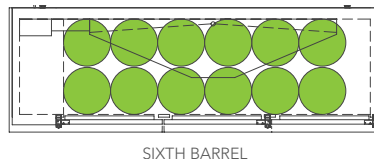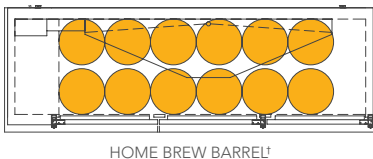

● Half/Quarter Barrel ● Slim Quarter Barrel ● Sixth Barrel ● Home Brew Barrel


\* Top view shown. Please consult your beer distributor for specific sizes.  
† 25-25/32" usable interior height.



# Bar Refrigeration | Keg Configurations

## TBR™/TDR™ KEG CONFIGURATIONS

### Common Draft Beer Keg Footprints

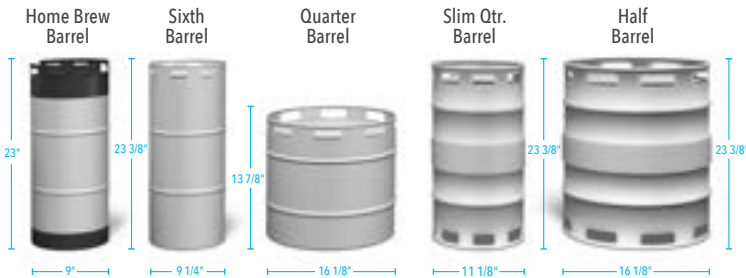


### DRAFT BEER KEG SPECIFICATIONS\*

Size	Home Brew Barrel	Sixth Barrel	Quarter Barrel	Slim Quarter Barrel	Half Barrel
Gallons	5.00	5.16	7.75	7.75	15.50
Ounces	640	611	992	992	1984
# of 12 oz. Beers	53	55	82	82	165
Weight (Full)	49 lbs.	58 lbs.	87 lbs.	87 lbs.	161 lbs.

\*Above dimensions may vary slightly as a result of differences between keg manufacturers.


### TBR/TDR-32\*

16-13/32" interior width X 18-3/4" interior depth

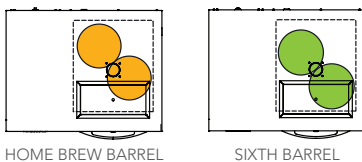

HOME BREW BARREL

SIXTH BARREL

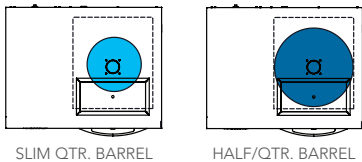


SLIM QTR. BARREL

HALF/QTR. BARREL


### TBR/TDR-36\*

20-13/32" interior width X 18-3/4" interior depth

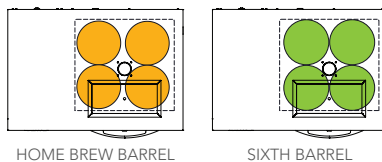

HOME BREW BARREL

SIXTH BARREL

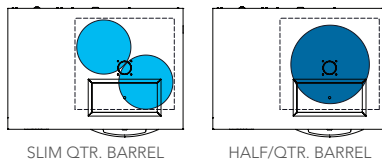


SLIM QTR. BARREL

HALF/QTR. BARREL


### TBR/TDR-48\*

32-13/32" interior width X 18-3/4" interior depth

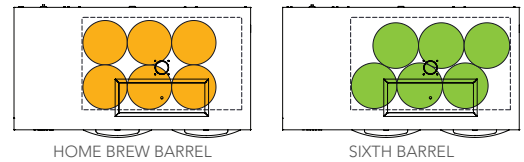

HOME BREW BARREL


SIXTH BARREL



SLIM QTR. BARREL


### TBR/TDR-52\*

36-13/32" interior width X 18-3/4" interior depth

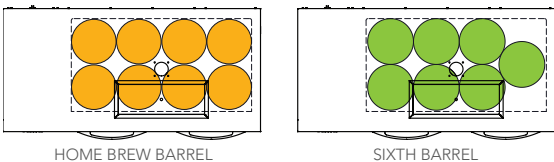

HOME BREW BARREL

SIXTH BARREL

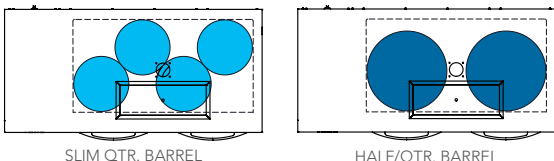


SLIM QTR. BARREL

HALF/QTR. BARREL


### TBR/TDR-60\*

44-13/32" interior width X 18-3/4" interior depth

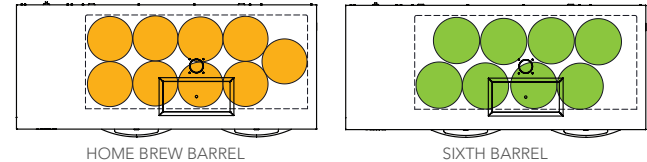

HOME BREW BARREL

SIXTH BARREL

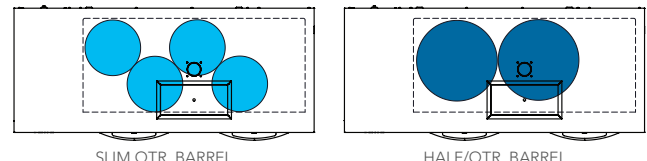

SLIM QTR. BARREL

HALF/QTR. BARREL

● Half/Quarter Barrel ● Slim Quarter Barrel ● Sixth Barrel ● Home Brew Barrel


\* Top view shown. Please consult your beer distributor for specific sizes.

†25-25/32" usable interior height.




**TBR/TDR-72\***

56-13/32" interior width X 18-3/4" interior depth

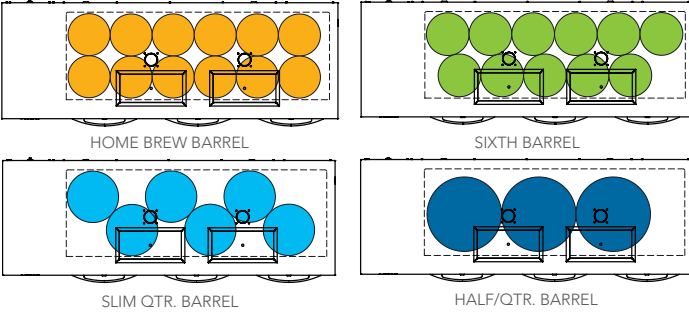


**TBR/TDR-84\***

68-13/32" interior width X 18-3/4" interior depth

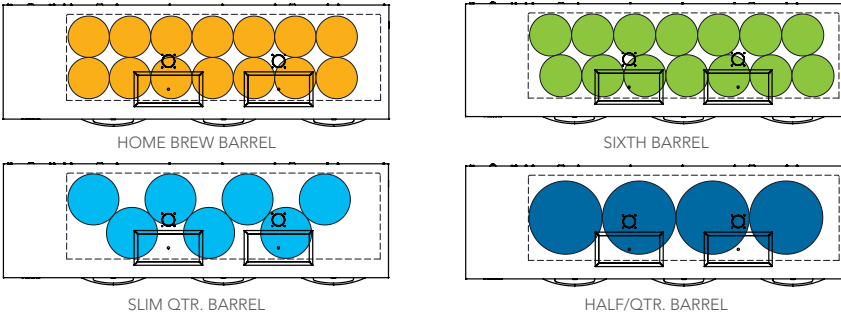


**TBR/TDR-92\***

76-13/32" interior width X 18-3/4" interior depth

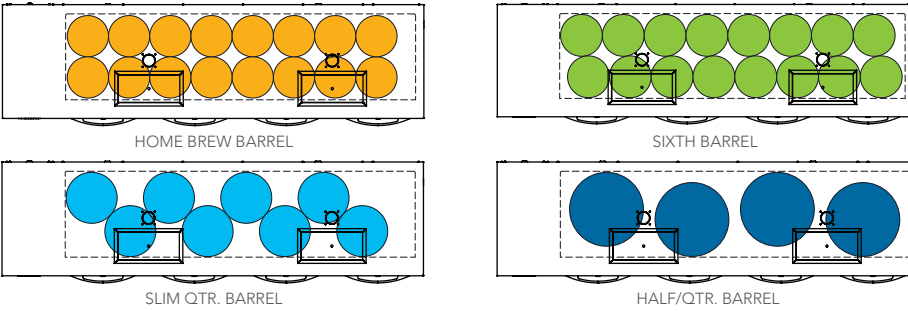

**TBR/TDR-108\***

92-13/32" interior width X 18-3/4" interior depth

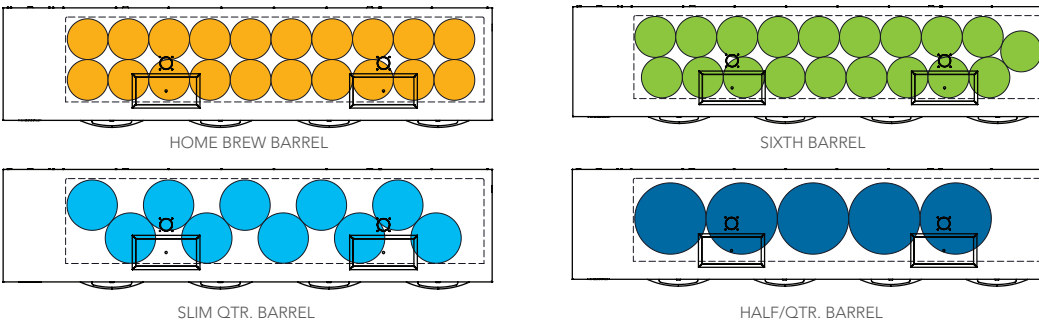

● Half/Quarter Barrel ● Slim Quarter Barrel ● Sixth Barrel ● Home Brew Barrel

\* Top view shown. Please consult your beer distributor for specific sizes.  
† 25-25/32" usable interior height.



# Bar Refrigeration | Panel Ready Doors

## TBR™/TDR™ PANEL READY DOORS

### Match your style and decor!

True's line of refrigerated bar equipment now offers the option of Panel Ready Doors\* which allow you to **enhance any bar with a custom look to match your cabinetry.**



**TBR52-ROSZ1-R-B-SG-1**

Please scan the QR code to access the TBR | TDR Bar Refrigeration Installation Manual and refer to the "Overlay Panel Specifications" (Pages 15-20).





#### Please Note

- True **does not** manufacture custom overlay panels.
- True cabinets with panel ready doors will ship **without** finished panels in place. (See black cabinet shown above).
- **Detailed drawings and measurements** are provided in the install manuals for aftermarket production of overlay panels.

Your cabinet will come without finished front panels but **ready for custom after-market panel installation** to further customize the look and style of your equipment.

Available on all TBR and TDR models.

\*Custom overlay panels not sold by True. Cabinet ships ready for custom panel installation.

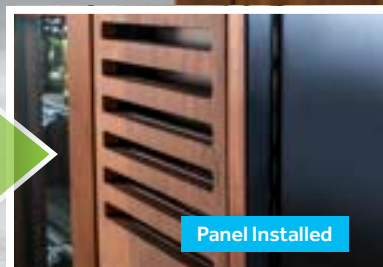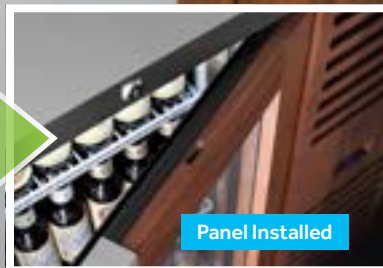



# BAR REFRIGERATION

True's line of bar refrigerators offers multiple options to choose from. Whether it's temperature range, door type, or lighting color, True Bar refrigerators can be customized to fit the functionality and style of any bar.

## TBR™/TDR™ NOMENCLATURE

### Model Family

TBR™ | True Bar Refrigerator

TDR™ | True Draft Refrigerator

### Type

RI | Reach-In

PT | Pass Thru

RO | Reach-In Panel Ready

PO | Pass Thru Panel Ready

### Refrigeration System Side

L | Left

R | Right

### Front Side Cabinet Type

S | Solid

G | Glass

1 | Sliding Glass

# TBR72-RISZ1-L-B-GGG-1

### Length

32" | 36" | One Section

48" | 52" | 60" | Two Section

72" | 84" | Three Section

92" | 108" | Four Section

### Temperature

SZ1 | Single Zone (35°F)

SZ2 | Single Zone (55°F)

SZ3 | Single Zone (45°F)

### Main Cabinet Finish

B | Black (Black Cabinet/  
SS Countertop)

Z | Black (Black Cabinet/  
Black Countertop\*)

S | Stainless Steel

X | Custom

### Voltage

1 | 115/60 Hz

2 | 220-40 / 50-60 Hz

**\*NOTE:** Black countertops not offered on the 108" models.