




# HEATED CABINETS



# Bottom Mount Reach-Ins | TH Series

## HEATED CABINETS

### Solid & Glass Doors

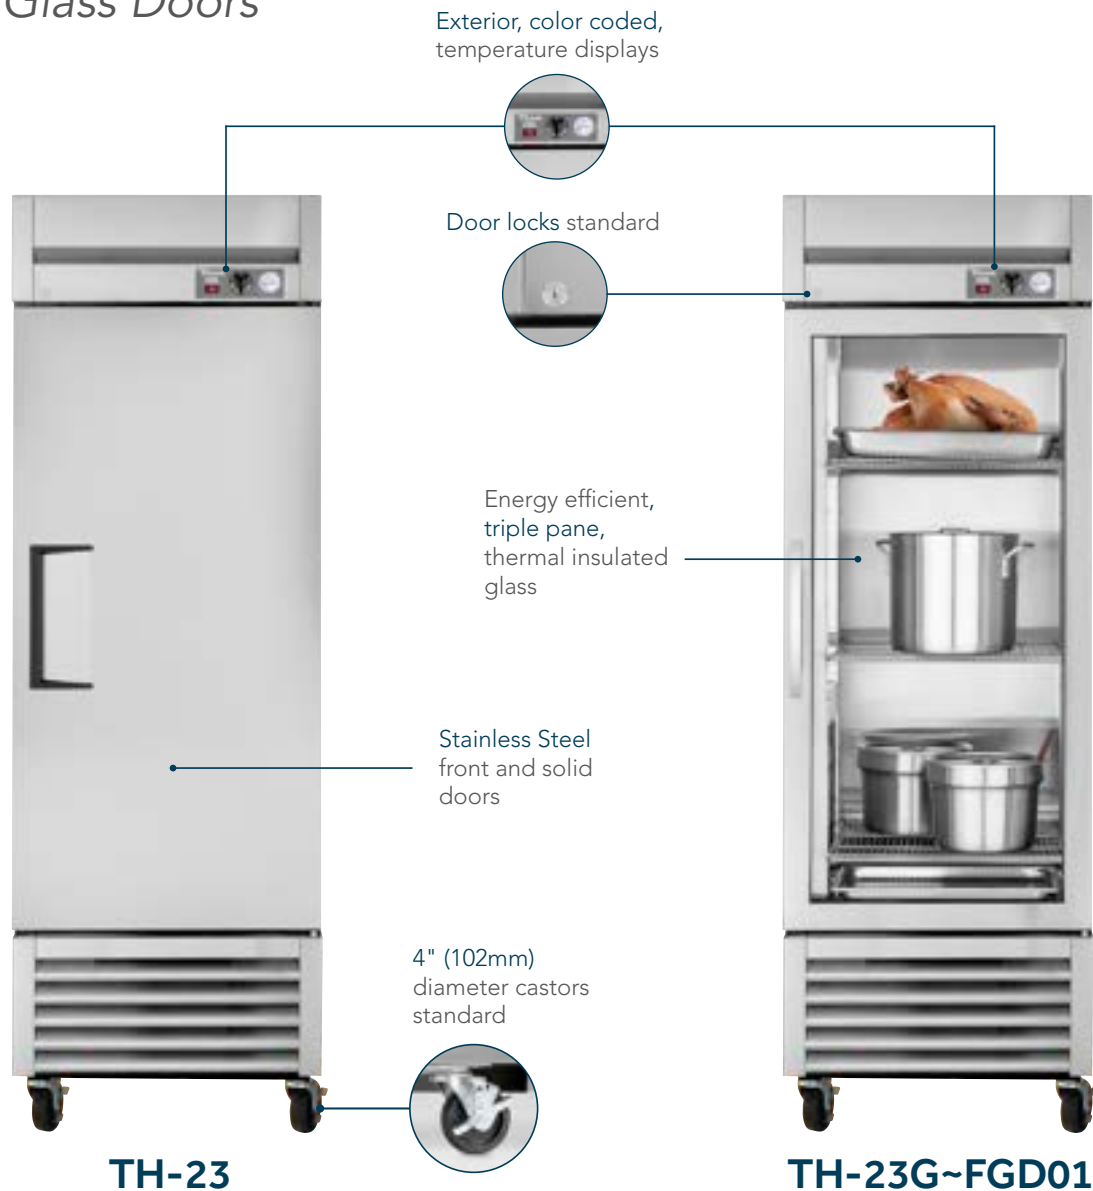

## Features/Benefits

- Powerful forced-air heating provides holding temperatures of 80°F (22.7°C) to 180°F (82.2°C) uniformly throughout the cabinet.
- Low velocity fans assure even temperature throughout cabinet. A vent is located at the top of the cabinet for positive humidity control.
- Heater - sheathed for corrosion resistance.
- 12" x 20" (305mm x 508mm) water pan standard for contents requiring high humidity.
- Adjustable dial control is a standard feature for low humidity application (turn counter clockwise to ventilate).
- Adjustable, heavy-duty chrome-plated shelves.
- Positive seal self-closing doors with factory tested (over 1,000,000 times) lifetime guaranteed door hinges and torsion type closure system.
- Incandescent interior lighting, safety shielded.
- Self-contained system - simple installation. Equipped with 9-foot cord.
- Stainless Steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Bun tray rack (optional) - solid door heated cabinet interior accommodates this option (glass door model does not accommodate this option).



## TH SERIES HEATED CABINETS

Model	# of Doors	# of Shelves	Watts	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
TH-23	1	3	850	7.8	260 (118)	27 x 29½ x 78¾	686 x 750 x 1991
<b>GLASS DOORS</b>							
TH-23G~FGD01	1	3	850	7.8	290 (132)	27 x 29½ x 78¾	686 x 750 x 1991

† Depth does not include 1¾" (35 mm) for door handles (glass door model only).  
 \* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.  
 \* Height does not include 1" (26mm) for ventilator cap.

# Top Mount Reach-Ins | SPEC SERIES® Heated Cabinets

## STR/STA/STG REACH-IN & PASS-THRU HEATED CABINETS

*Solid & Glass, Full & Half Doors*



**STR2H-2S**



**STG1H-2HS**



**STR2H-2S**



**STA2H-2G**



**STG2HPT-2S-2S**

## Features/Benefits

- Cabinet designed to provide holding temperatures of 140°F to 180°F (60°C to 82.2°C). Heating system controlled by exterior on/off switch and electronic temperature control.
- One (1) stainless steel (for corrosion resistance) heating element per section for uniform generation of electric heat. 1500 Watts per heating element.
- ANSI/NSF Standard 4 compliant for open food product.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units.
- Incandescent interior lighting.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- STR & STA Series Exterior - Stainless steel door, front & sides.
- STG Series Exterior - stainless steel doors & front, with matching aluminum sides.
- STR Series Interior - Stainless steel side walls, back, floor, door liner, & ceiling.
- STA & STG Series Interior - Aluminum side walls & back. Stainless steel floor & ceiling.
- Self-contained system.



## STR/STA/STG REACH-IN HEATED CABINETS

Model	# of Doors	# of Shelves STA/STG models	Watts	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>						
STR1H-1S†	1	3	1500	350 (159)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2H-2S††	2	6	3000	570 (259)	52½ x 33¾ x 77¾	1337 x 858 x 1975
<b>SOLID HALF DOORS</b>						
STR1H-2HS†	2	3	1500	385 (175)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2H-4HS††	4	6	3000	650 (295)	52½ x 33¾ x 77¾	1337 x 858 x 1975
<b>GLASS DOORS</b>						
STR1H-1G†	1	3	1500	370 (158)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2H-2G††	2	6	3000	N/A	52½ x 33¾ x 77¾	1337 x 858 x 1975
<b>GLASS HALF DOORS</b>						
STR1H-2HG†	2	3	1500	370 (168)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2H-4HG††	4	6	3000	650 (295)	52½ x 33¾ x 77¾	1337 x 858 x 1975

† Depth does not include 1½" (39 mm) for door handles.

\* Height does not include 6½" (156mm) for castors or 6" (153mm) for optional legs.

\* Height does not include ¼" (7mm) for system mechanical components.

† Requires 208-240/60 single phase, 15 amp dedicated outlet for single section heated cabinets.

†† Requires 208-240/60 single phase, 20 amp dedicated circuit for two section heated cabinets. Two section heated cabinets require hard wiring.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

## STR/STA/STG PASS-THRU HEATED CABINETS

Model	# of Doors	# of Shelves STA/STG models	Watts	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>						
STR1HPT-1S-1S†	1 fr / 1 bk	3	1500	400 (182)	27½ x 36½ x 77¾	699 x 918 x 1975
STR2HPT-2S-2S††	2 fr / 2 bk	6	3000	680 (309)	52½ x 36½ x 77¾	1337 x 918 x 1975
<b>SOLID HALF DOORS</b>						
STR1HPT-1G-1S†	1 fr / 1 bk	3	1500	400 (182)	27½ x 36½ x 77¾	699 x 918 x 1975
STR2HPT-2G-2S††	2 fr / 2 bk	6	3000	650 (295)	52½ x 36½ x 77¾	1337 x 918 x 1975

† Depth does not include 1½" (39 mm) for door handles.

\* Height does not include 6½" (156mm) for castors or 6" (153mm) for optional legs.

\* Height does not include ¼" (7mm) for system mechanical components.

† Requires 208-240/60 single phase, 15 amp dedicated outlet for single section heated cabinets.

†† Requires 208-240/60 single phase, 20 amp dedicated circuit for two section heated cabinets. Two section heated cabinets require hard wiring.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

### Series Shelving

**STR Series Shelving** - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

**STA Series Shelving** - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

**STG Series Shelving** - (3) heavy-duty, PVC-coated wire shelves per section.

(4) different interior kits available.

See "Spec Series accessories" (pg. 211) for additional details.

# Top Mount Reach-Ins | SPEC SERIES® Heated Cabinets

## STR/STA/STG ROLL-IN & ROLL-THRU HEATED CABINETS

*Solid, Full Doors*



**STR1HRI-1S**



**STA1HRT-1S-1S**



**STG2HRT-2S-2S**



**STR2HRI-2S**



**STR1HRI89-1S**

## Features/Benefits

- Cabinet designed to provide holding temperatures of 140°F to 180°F (60°C to 82.2°C). Heating system controlled by exterior on/off switch and electronic temperature control.
- Accepts roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 66"H (686mm x 737mm x 1,677mm). STR/STA/STG1RRI89-1S and STR/STA/STG2RRI89-2S accept roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 72"H (686mm x 737mm x 1,829mm) (supplied by others).
- One (1) stainless steel (for corrosion resistance) heating element per section for uniform generation of electric heat. 1500 Watts per heating element.
- ANSI/NSF Standard 4 compliant for open food product.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units.
- Positive seal self-closing door with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, four (4) per door section.
- Incandescent interior lighting.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- STR & STA Series Exterior - Stainless steel door, front & sides.
- STG Series Exterior - stainless steel doors & front, with matching aluminum sides.
- STR Series Interior - Stainless steel side walls, back, floor, door liner, & ceiling.
- STA & STG Series Interior - Aluminum side walls & back. Stainless steel floor & ceiling.
- Self-contained system.



## STR/STA/STG ROLL-IN HEATED CABINETS

Model	# of Doors	Watts	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>					
STR1HRI-1S‡	1	2000	445 (202)	35 x 34¾ x 83¾	889 x 883 x 1975
STR2HRI-2S	2	4000	760 (345)	68 x 34¾ x 83¾	1723 x 883 x 1975
<b>SOLID DOORS 89" HIGH</b>					
STR1HRI89-1S	1	2000	380 (173)	35 x 34¾ x 88¾	889 x 883 x 2255

† Depth does not include 4¼" (108 mm) for ramp.

\* Height does not include ¼" (7mm) for system mechanical components.

‡ Requires 115/208-240/60/1 Hz, single phase, 20 amp dedicated outlet.

note: STR/STA/STG2HRI-2S requires hard wiring.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

## STR/STA/STG ROLL-THRU HEATED CABINETS

Model	# of Doors	Watts	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>					
STR1HRT-1S-1S‡	1 fr / 1 bk	2000	480 (218)	35 x 37½ x 83¾	889 x 953 x 1975
STR2HRT-2S-2S	2 fr / 2 bk	4000	825 (375)	68 x 37½ x 83¾	1337 x 953 x 1975
<b>SOLID HALF DOORS</b>					
STR1HRT89-1S-1S‡	1 fr / 1 bk	2000	480 (218)	35 x 37½ x 88¾	889 x 953 x 2255

† Depth does not include 4¼" (108 mm) for ramp.

\* Height does not include ¼" (7mm) for system mechanical components.

‡ Requires 115/208-240/60/1 Hz, single phase, 20 amp dedicated outlet.

note: STR/STA/STG2HRT-2S-2S requires hard wiring.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.



# HEATED CABINETS

Heated holding cabinets provide a consistent heat designed to keep baked and cooked food warm. Low-velocity fans evenly circulate air to keep the food warm, while the top vent can be adjusted to control the humidity levels, so food doesn't dry out.