



# REACH-IN REFRIGERATION





# T-SERIES<sup>®</sup>

## BOTTOM MOUNT

The number one selling Reach-in cabinet, chosen by more restaurant owners than any other upright refrigerator. High-end refrigeration meets functionality with True's Reach-in refrigerators. These cabinets have a front-of-house look along with rugged construction for longevity in the busiest kitchens.








# SPEC SERIES®

## TOP MOUNT

With highly customizable interior and exterior options, Spec Series® are designed to meet the demands of the institutional and consultant market places such as high volume kitchens, schools and hotels.

### SPEC SERIES® NOMENCLATURE

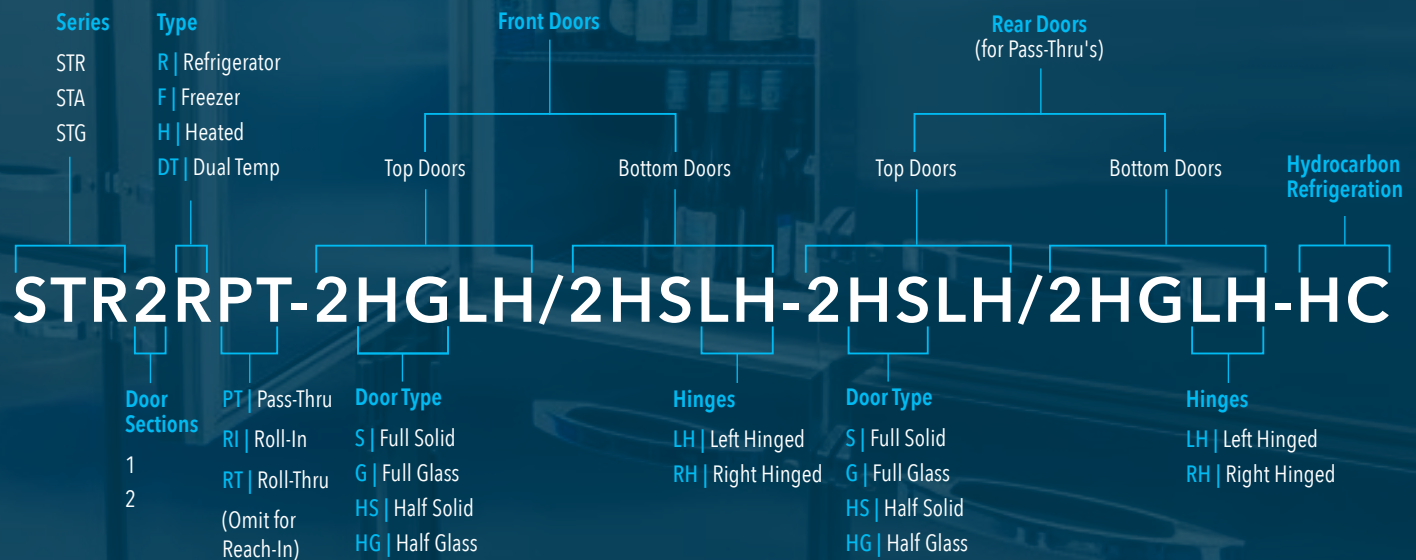

**NOTE:** Standard hinging is as follows:  
STR/STA/STG1 - Right Hinged (RH)  
STR/STA/STG2 - Left/Right Hinged (LH)



# Bottom Mount Reach-Ins | T-Series® Refrigerators

## REACH-IN & PASS-THRU REFRIGERATORS

*Solid & Glass, Full & Half Door*

Door locks standard

Entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP)

Lifetime guaranteed door handles

Digital control for state-of-the-art temperature precision. Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation. Refrigerators hold 33° to 38°F

natural refrigerant.

Bottom mount compressor unit performs better in kitchens with higher ambient temperatures and high grease areas

**T-49-HC**



T-23PT-HC



T-19G-HC-FGD01



T-49-4-HC



T-72-HC

## Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Exterior - Stainless steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum with stainless steel floor.
- Positive seal self-closing doors with factory tested (over 1,000,000 times) lifetime guaranteed door hinges and torsion type closure system.
- Energy efficient, "Low-E", thermal insulated glass doors.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- 4" (102mm) diameter castors standard (leg levelers standard for T-12-HC & T-12GHC~FGD01; 2.5" (64mm) diameter castors standard equipment for T-19-HC & T-19GHC~FGD01).
- Door locks standard (available on T-12-HC & T-12G-HC~FGD01).
- Exterior digital temperature display (not available on T-12-HC & T-12G-HC~FGD01).
- Legs available for most models.
- LED interior lighting. Safety shielded.
- Lifetime guaranteed recessed door handles on solid door models.
- Alternative hinge orientation available on most T-23/49/72 models. Contact factory for specifics.

**TRADITIONAL REACH-IN REFRIGERATOR**

truemfg.com



## T-SERIES® TRADITIONAL REACH-IN REFRIGERATORS

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
T-11-HC	1	3	1/10	1.6	190 (87)	19 1/4 x 21 1/4 x 70 3/8	487 x 539 x 1786
T-12-HC	1	3	1/6	2.5	185 (84)	24 7/8 x 23 3/8 x 63 3/8	632 x 588 x 1604
T-19-HC	1	3	1/10	1.5	245 (112)	27 x 24 1/2 x 75 1/4	686 x 623 x 1912
T-23-HC	1	3	1/4	2.2	270 (123)	27 x 29 1/2 x 78 3/8	686 x 750 x 1991
T-35-HC	2	6	1/3	5.6	365 (166)	39 1/2 x 29 1/2 x 78 3/8	1004 x 750 x 1991
T-43-HC	2	6	1/2	5.4	370 (168)	47 x 29 1/2 x 78 3/8	1194 x 750 x 1991
T-49-HC	2	6	1/2	5.4	450 (205)	54 1/8 x 29 1/2 x 78 3/8	1375 x 750 x 1991
T-72-HC	3	9	3/4	6.9	575 (261)	78 1/8 x 29 1/2 x 78 3/8	1985 x 750 x 1991
<b>GLASS DOORS</b>							
T-11G-HC~TSL01	1	3	1/10	1.6	220 (100)	19 1/4 x 21 3/8 x 70 3/8	487 x 541 x 1786
T-11G-HC~FGD01	1	3	1/10	1.6	220 (100)	19 1/4 x 21 1/4 x 70 3/8	487 x 539 x 1786
T-12G-HC~FGD01	1	3	1/6	1.8	220 (100)	24 7/8 x 23 3/4 x 63	632 x 591 x 1600
T-19G-HC~FGD01	1	3	1/4	2.2	265 (121)	27 x 24 1/2 x 75 1/4	686 x 623 x 1918
T-23G-HC~FGD01	1	3	1/4	2.2	315 (143)	27 x 29 7/8 x 78 3/8	686 x 759 x 1991
T-35G-HC~FGD01	2	6	1/3	5.6	415 (189)	39 3/8 x 29 7/8 x 78 3/8	1007 x 759 x 1991
T-49G-HC~FGD01	2	6	1/2	5.4	465 (211)	54 1/4 x 29 7/8 x 78 3/8	1378 x 759 x 1991
T-72G-HC~FGD01	3	9	3/4	6.9	630 (286)	78 1/8 x 29 7/8 x 78 3/8	1985 x 759 x 1991
<b>SOLID HALF DOORS</b>							
T-23-2-HC	2	3	1/4	2.2	275 (125)	27 x 29 1/2 x 78 3/8	686 x 750 x 1991
T-49-4-HC	4	6	1/2	5.4	450 (205)	54 1/8 x 29 1/2 x 78 3/8	1375 x 750 x 1991
<b>GLASS HALF DOORS</b>							
T-23G-2-HC~FGD01	2	3	1/4	2.2	331 (151)	27 x 29 3/4 x 78 3/8	686 x 754 x 1991
T-49G-4-HC~FGD01	4	6	1/2	5.4	515 (234)	54 1/8 x 29 3/4 x 78 3/8	1375 x 756 x 1991
<b>COMBINATION HALF DOORS</b>							
T-23-1-G-1-HC~FGD01	2	3	1/4	2.2	311 (142)	27 x 29 3/4 x 78 3/8	686 x 754 x 1991
T-49-2-G-2-HC~FGD01	4	6	1/2	5.4	513 (233)	54 1/8 x 29 3/4 x 78 3/8	1375 x 756 x 1991

† Depth does not include 1 5/8" (42 mm) for glass door handles or 1/2" (13 mm) for system mechanical components.

\* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs 3 1/4" (83mm) castor height for T-19-HC & T-19G-HC~FGD01.

\* Height on T-12-HC & T-12G-HC~FGD01 does not include 1" (26mm) for upper door hinge.

note: T-12-HC & T-12G-HC~FGD01 standard with leg levelers, optional 2 1/2" (64mm) diameter castors and 6" (153mm) seismic legs available, 6" (153mm) legs not available.

## T-SERIES® PASS-THRU

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D H* (in)	Cabinet Dimensions W D H* (mm)
<b>PASS-THRU SOLID FRONT DOORS/SOLID REAR DOORS</b>							
T-23PT-HC	1 fr / 1bk	3	1/4	2.2	325 (148)	27 x 32 1/8 x 78 3/8	686 x 816 x 1991

\* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

# Bottom Mount Reach-Ins | TSD Series Refrigerators

## SLIDE DOOR REFRIGERATORS

*Solid & Glass Slide Door*



TSD-09G-HC-LD



TSD-33-HC



TSD-47G-HC-LD




TSD-69-HC

## Features/Benefits

- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Exterior - Stainless steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum liner. Stainless steel floor with coved corners.
- Energy efficient, "Low-E", thermal insulated glass doors.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- Legs standard on slide door models (except for TSD-09G-HC-LD which uses leg levelers).
- LED interior lighting. Safety shielded.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.

**TRADITIONAL REACH-IN REFRIGERATOR**

truemfg.com



## TSD SERIES SLIDE DOOR REFRIGERATORS

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
TSD-33-HC	2	6	½	6.5	350 (159)	39½ x 29¾ x 78¾	1004 x 753 x 1991
TSD-47-HC	2	6	½	8.5	410 (186)	54½ x 29¾ x 78¾	1375 x 753 x 1991
TSD-69-HC	3	9	½	7.1	630 (286)	78½ x 29¾ x 78¾	1985 x 753 x 1991
<b>GLASS DOORS</b>							
TSD-09G-HC-LD	2	3	¼	1.9	280 (127)	36 x 21 x 35¾	913 x 532 x 911
TSD-33G-HC-LD	2	6	½	6.5	370 (168)	39½ x 29¾ x 78¾	1004 x 753 x 1991
TSD-47G-HC-LD	2	6	½	8.5	440 (200)	54½ x 29¾ x 78¾	1375 x 753 x 1991
TSD-69G-HC-LD	3	9	½	7.1	630 (286)	78½ x 29¾ x 78¾	1985 x 753 x 1991

† Depth does not include ¾" (10 mm) for door handles (solid or glass), ⅞" (23 mm) for door handle on TSD-09G-HC-LD.

\* Height does not include 6 ⅛" (156mm) for legs or 5" (127mm) for optional castors. (TSD-09G-HC-LD standard with leg levelers).


# Bottom Mount Reach-Ins | TS Series Refrigerators

## STAINLESS STEEL REFRIGERATORS

*Solid & Glass, Full & Half Door*



TS-23G-HC-FGD01



TS-23-2-HC



TS-49-HC



TS-72G-HC-FGD01

## Features/Benefits

- True's "TS" series is the choice for the exclusive stainless steel commercial application. Designed with enduring quality that protects your long-term investment, and oversized refrigeration that guarantees exceptional food preservation.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Maintains 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Energy efficient, thermal insulated glass doors.
- Energy efficient, thermal insulated glass doors.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- LED interior lighting. Safety shielded.
- Alternative hinge orientation available on most TS-23/49/72 models. Contact factory for specifics.
- A "no-stoop", lower shelf.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.

TRADITIONAL REACH-IN REFRIGERATOR

truemfg.com



## TS SERIES REACH-IN REFRIGERATORS

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
TS-23-HC	1	3	¼	2.2	285 (130)	27 x 29½ x 78¾	686 x 750 x 1991
TS-35-HC	2	6	⅓	5.6	350 (159)	39½ x 29½ x 78¾	1004 x 750 x 1991
TS-43-HC	2	6	½	5.4	380 (173)	47 x 29½ x 78¾	1194 x 750 x 1991
TS-49-HC	2	6	½	5.4	400 (182)	54½ x 29½ x 78¾	1375 x 750 x 1991
TS-72-HC	3	9	¾	6.9	615 (280)	78¾ x 29½ x 78¾	1985 x 750 x 1991
<b>GLASS DOORS</b>							
TS-23G-HC~FGD01	1	3	¼	2.2	315 (143)	27 x 29¾ x 78¾	686 x 756 x 1991
TS-49G-HC~FGD01	2	6	½	5.4	533 (242)	54¼ x 29¾ x 78¾	1378 x 759 x 1991
TS-72G-HC~FGD01	3	9	¾	6.9	691 (314)	78¾ x 29¾ x 78¾	1378 x 759 x 1991
<b>SOLID HALF DOORS</b>							
TS-23-2-HC	2	3	¼	2.2	320 (146)	27 x 29½ x 78¾	686 x 750 x 1991
TS-49-4-HC	4	6	½	5.4	400 (182)	54½ x 29½ x 78¾	1375 x 750 x 1991
<b>GLASS HALF DOORS</b>							
TS-23G-2-HC~FGD01	2	3	¼	2.2	330 (150)	27 x 29¾ x 78¾	686 x 756 x 1991
TS-49G-4-HC~FGD01	4	6	½	5.4	515 (234)	54½ x 29¾ x 78¾	1375 x 756 x 1991
<b>COMBINATION HALF DOORS</b>							
TS-23-1-G-1-HC~FGD01	2	3	¼	2.2	330 (150)	27 x 29¾ x 78¾	686 x 756 x 1991
TS-49-2-G-2-HC~FGD01	4	6	½	5.4	515 (233)	54½ x 29¾ x 78¾	1375 x 756 x 1991

† Depth does not include 1⅝" (42 mm) for door handles (glass door models only).

\* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

# Bottom Mount Reach-Ins | TGN® Refrigerators

## REACH-IN GASTRONORM REFRIGERATORS

*Solid & Glass Doors*



Dual tray slide system with wire shelves (accommodates two (2) 12" (305mm) x 20" (508mm) food storage pans)



4" (102mm) diameter castors standard. Optional legs available



**TGN-2R-2S**



**TGN-1R-1G**



**TGN-1R-1S**



**TGN-2R-2G**

## Features/Benefits

- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Maintains 32°F to 41°F (0°C to 5°C) temperatures.
- Energy efficient, thermal insulated glass doors.
- Barrel door locks
- Exterior - Stainless steel front. Aluminum ends and GalFan back and top.
- Interior - Clear coated aluminum, stainless steel floor.
- Exterior temperature display.
- Field reversible door hinging.
- Energy efficient, thermal insulated glass doors.
- LED interior lighting.
- A "no-stoop", lower shelf.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.

**TRADITIONAL REACH-IN REFRIGERATOR**

[truemfg.com](http://truemfg.com)



## TGN® REACH-IN REFRIGERATORS

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
TGN-1R-1S	1	3	¼	2.2	285 (130)	27 x 29½ x 78¾	686 x 750 x 1991
TGN-2R-2S	2	6	¼	2.9	520 (236)	57¾ x 33¾ x 78½	1464 x 861 x 1994
<b>GLASS DOORS</b>							
TGN-1R-1G	1	3	¼	2.2	315 (143)	27 x 29¾ x 78¾	686 x 756 x 1991
TGN-2R-2G	2	6	¼	2.9	520 (236)	57¾ x 33¾ x 78½	1464 x 861 x 1994

† Depth does not include 1¾" (44 mm) for door handles or ½" (13 mm) for rear mechanical components.

\* Height does not include 5" (127mm) for castors.

## TGN® TRAY SLIDE SYSTEMS



### Standard Tray Slide

will allow a food storage pan to be placed under the shelf



### Universal Tray Slides

16 ga. stainless steel  
Angle type for bottom support of:  
(1) 18" x 26" pan or  
(2) 14" x 18" pans or  
(2) 12" x 20" pans



### Angle Tray Slides


16 ga. stainless steel  
Angle type for bottom support of:  
(1) 18" x 26" pan or  
(2) 14" x 18" pans

Note: Up to two (2) options can be used in unit.

# Top Mount Reach-Ins | SPEC SERIES® Refrigerators

## STR/STA/STG REFRIGERATORS

*Solid & Glass, Full & Half Door*

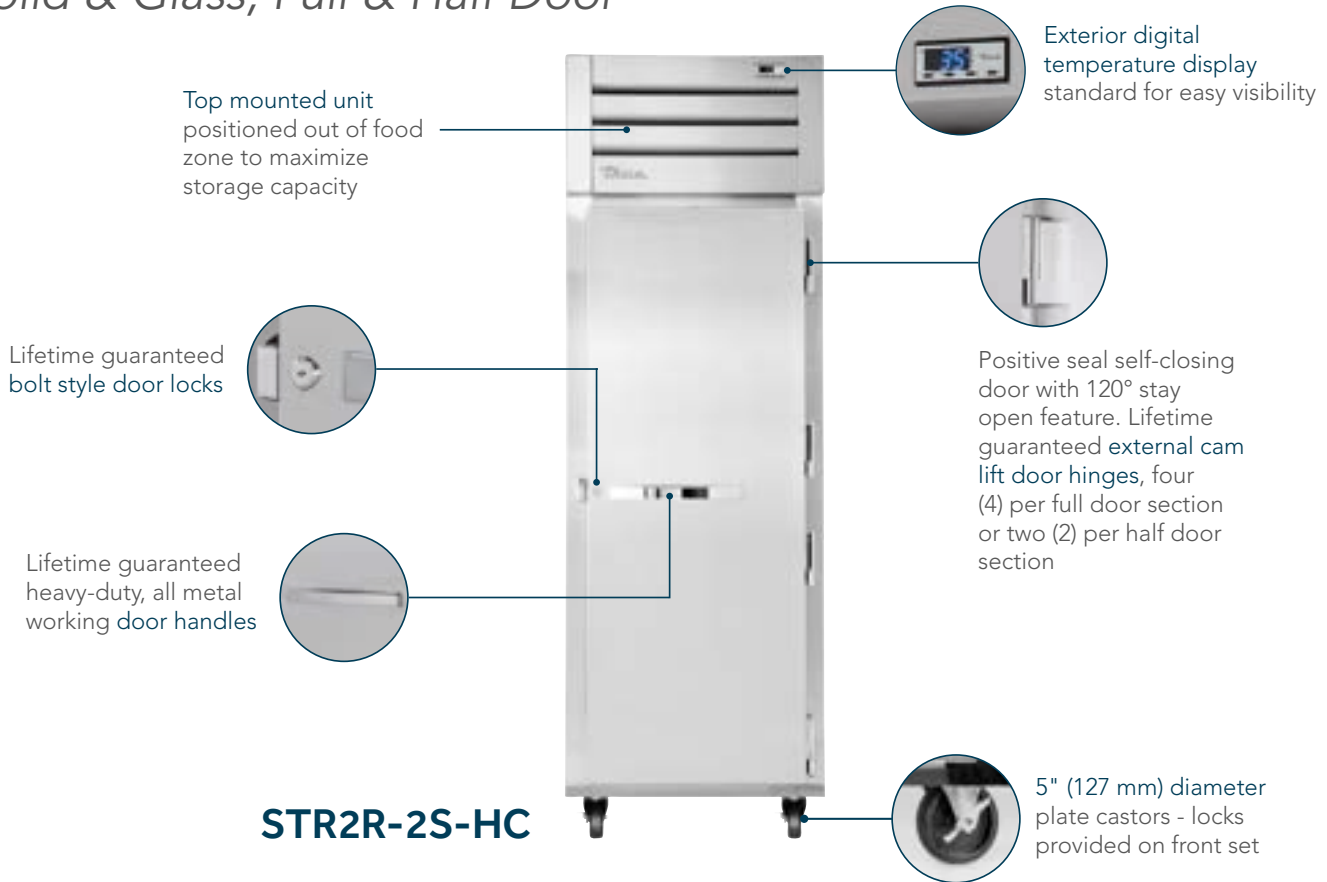

STA1R-1HG/1HS-HC



STR1R-2HS-HC



STR2R-2G-HC



STG2R-4G-HC

## Features/Benefits

- Maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units. (optional on STA/STG units).
- LED interior lighting, safety shielded.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.



## STR/STA/STG REACH-IN REFRIGERATORS

Model	# of Doors	# of Shelves STA/STG models	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
STR1R-1S-HC	1	3	¼	3.8	430 (196)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2R-2S-HC	2	6	½	5.9	650 (295)	52½ x 33¾ x 77¾	1337 x 858 x 1975
STR3R-3S-HC	3	9	¼	6.1	770 (350)	77¾ x 33¾ x 77¾	1975 x 858 x 1975
<b>SOLID HALF DOORS</b>							
STR1R-2HS-HC	2	3	¼	3.8	430 (196)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2R-4HS-HC	4	6	½	5.9	730 (332)	52½ x 33¾ x 77¾	1337 x 858 x 1975
STR3R-6HS-HC	6	9	¼	6.1	880 (400)	77¾ x 33¾ x 77¾	1975 x 858 x 1975
<b>GLASS DOORS</b>							
STR1R-1G-HC	1	3	¼	3.8	480 (218)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2R-2G-HC	2	6	½	5.9	795 (361)	52½ x 33¾ x 77¾	1337 x 858 x 1975
STR3R-3G-HC	3	9	¼	6.1	867 (394)	77¾ x 33¾ x 77¾	1975 x 858 x 1975
<b>GLASS HALF DOORS</b>							
STR1R-2HG-HC	2	3	¼	3.8	460 (209)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2R-4HG-HC	4	6	½	5.9	730 (332)	52½ x 33¾ x 77¾	1337 x 858 x 1975
<b>COMBINATION HALF DOORS</b>							
STR1R-1HG/1HS-HC	2	3	¼	3.8	450 (205)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2R-2HG/2HS-HC	4	6	½	5.9	710 (322)	52½ x 33¾ x 77¾	1337 x 858 x 1975

† Depth does not include 1½" (39 mm) for door handles.

\* Height does not include 6⅞" (156mm) for castors or 6" (153mm) for optional legs

\* Height does not include ¼" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

## VLD VERTICAL LED LIGHTING MODELS

Model
<b>GLASS DOORS</b>
STR1RVLD-1G-HC
STR2RVLD-2G-HC
STR3RVLD-3G
<b>GLASS HALF DOORS</b>
STR1RVLD-2HG-HC
STR2RVLD-4HG-HC

note: Specifications are the same as standard models, just vertical LED Lighting added.

note: Only available on refrigerators.



### Series Shelving

**STR Series Shelving** - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

**STA Series Shelving** - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

**STG Series Shelving** - (3) heavy-duty, PVC-coated wire shelves per section.


(4) different interior kits available.

See "Spec Series accessories" (pg. 211) for additional details.

# Top Mount Reach-Ins | SPEC SERIES® Refrigerators

## STR/STA/STG PASS-THRU REFRIGERATORS

*Solid & Glass, Full & Half Door*

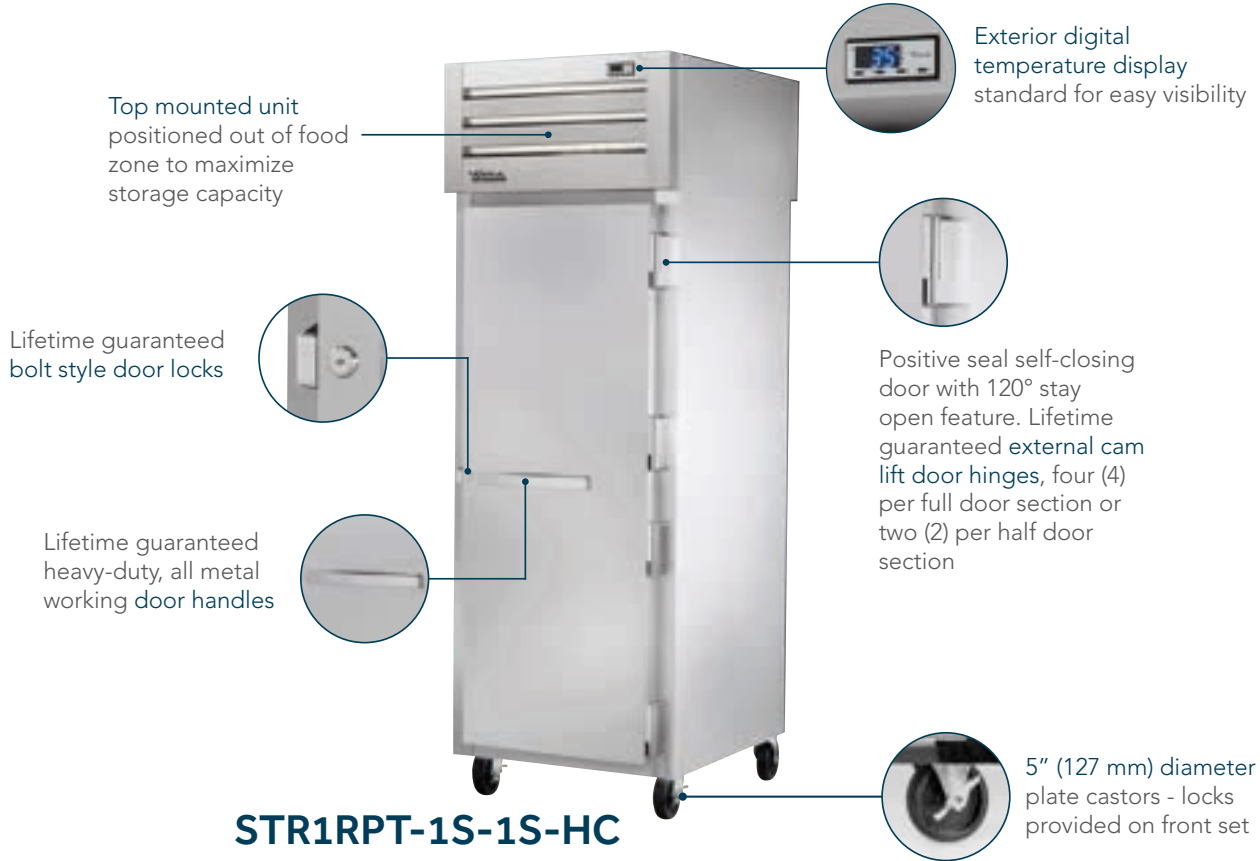

STG1RPT-2HG-1S-HC



STA1RPT-2HS-1S-HC



STA2PRT-4G-4HG-HC



STR2RRT-4HS-2S-HC

## Features/Benefits

- Maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units. (optional on STA/STG units).
- LED interior lighting, safety shielded.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.



## STR/STA/STG PASS-THRU REFRIGERATORS

Model	# of Doors	# of Shelves STA/STG models	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H*	Cabinet Dimensions W D† H*
<b>SOLID FRONT/SOLID REAR DOORS</b>							
STR1RPT-1S-1S-HC	1 fr / 1 bk	3	¼	3.8	475 (216)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-2S-2S-HC	2 fr / 2 bk	6	½	5.9	720 (327)	52½x 36½x 77¾	1337 x 918 x 1975
<b>SOLID FRONT HALF DOORS/SOLID REAR DOORS</b>							
STR1RPT-2HS-1S-HC	2 fr / 1 bk	3	¼	3.8	440 (200)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-4HS-2S-HC	4 fr / 2 bk	6	½	5.9	745 (338)	52½x 36½x 77¾	1337 x 918 x 1975
<b>GLASS FRONT/SOLID REAR DOORS</b>							
STR1RPT-1G-1S-HC	1 fr / 1 bk	3	¼	3.8	475 (216)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-2G-2S-HC	2 fr / 2 bk	6	½	5.9	720 (327)	52½x 36½x 77¾	1337 x 918 x 1975
<b>GLASS FRONT HALF DOORS/SOLID REAR DOORS</b>							
STR1RPT-2HG-1S-HC	2 fr / 1 bk	3	¼	3.8	520 (236)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-4HG-2S-HC	4 fr / 2 bk	6	½	5.9	820 (372)	52½x 36½x 77¾	1337 x 918 x 1975
<b>COMBINATION FRONT HALF DOORS/SOLID REAR DOORS</b>							
STR1RPT-1HG/1HS-1S-HC	2 fr / 1 bk	3	¼	3.8	490 (223)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-2HG/2HS-2S-HC	4 fr / 2 bk	6	½	5.9	720 (327)	52½x 36½x 77¾	1337 x 918 x 1975
<b>SOLID FRONT/GLASS REAR DOORS</b>							
STR1RPT-1S-1G-HC	1 fr / 1 bk	3	¼	3.8	475 (216)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-2S-2G-HC	2 fr / 2 bk	6	½	5.9	720 (327)	52½x 36½x 77¾	1337 x 918 x 1975
<b>SOLID FRONT HALF DOORS/GLASS REAR DOORS</b>							
STR1RPT-2HS-1G-HC	2 fr / 1 bk	3	¼	3.8	440 (200)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-4HS-2G-HC	4 fr / 2 bk	6	½	5.9	745 (338)	52½x 36½x 77¾	1337 x 918 x 1975
<b>GLASS FRONT/GLASS REAR DOORS</b>							
STR1RPT-1G-1G-HC	1 fr / 1 bk	3	¼	3.8	440 (200)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-2G-2G-HC	2 fr / 2 bk	6	½	5.9	720 (327)	52½x 36½x 77¾	1337 x 918 x 1975
<b>COMBINATION FRONT HALF DOORS/GLASS REAR DOORS</b>							
STR1RPT-1HG/1HS-1G-HC	2 fr / 1 bk	3	¼	3.8	475 (216)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-2HG/2HS-2S-HC	4 fr / 2 bk	6	½	5.9	775 (352)	52½x 36½x 77¾	1337 x 918 x 1975
<b>GLASS FRONT HALF DOORS/GLASS REAR DOORS</b>							
STR1RPT-2HG-1G-HC	2 fr / 1 bk	3	¼	3.8	440 (200)	27½x 36½x 77¾	699 x 918 x 1975
STR2RPT-4HG-2G-HC	4 fr / 2 bk	6	½	5.9	820 (372)	52½x 36½x 77¾	1337 x 918 x 1975

† Depth does not include 1½" (39 mm) for door handles.

\* Height does not include 6½" (156mm) for castors or 6" (153mm) for optional legs

\* Height does not include ¼" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

## VLD VERTICAL LED LIGHTING MODELS

Model
<b>GLASS DOORS</b>
STR1RPTVLD-1G-HC
STR2RPTVLD-2G-HC
<b>GLASS HALF DOORS</b>
STR1RPTVLD-2HG-HC
STR2RPTVLD-4HG-HC

note: Specifications are the same as standard models, just vertical LED Lighting added.

note: Only available on refrigerators.



## Series Shelving

**STR Series Shelving** - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

**STA Series Shelving** - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

**STG Series Shelving** - (3) heavy-duty, PVC-coated wire shelves per section.


(4) different interior kits available.

See "Spec Series accessories" (pg. 211) for additional details.

# Top Mount Reach-Ins | SPEC SERIES® Refrigerators

## STR/STA/STG ROLL-IN & ROLL-THRU REFRIGERATORS

*Solid & Glass, Full Doors*

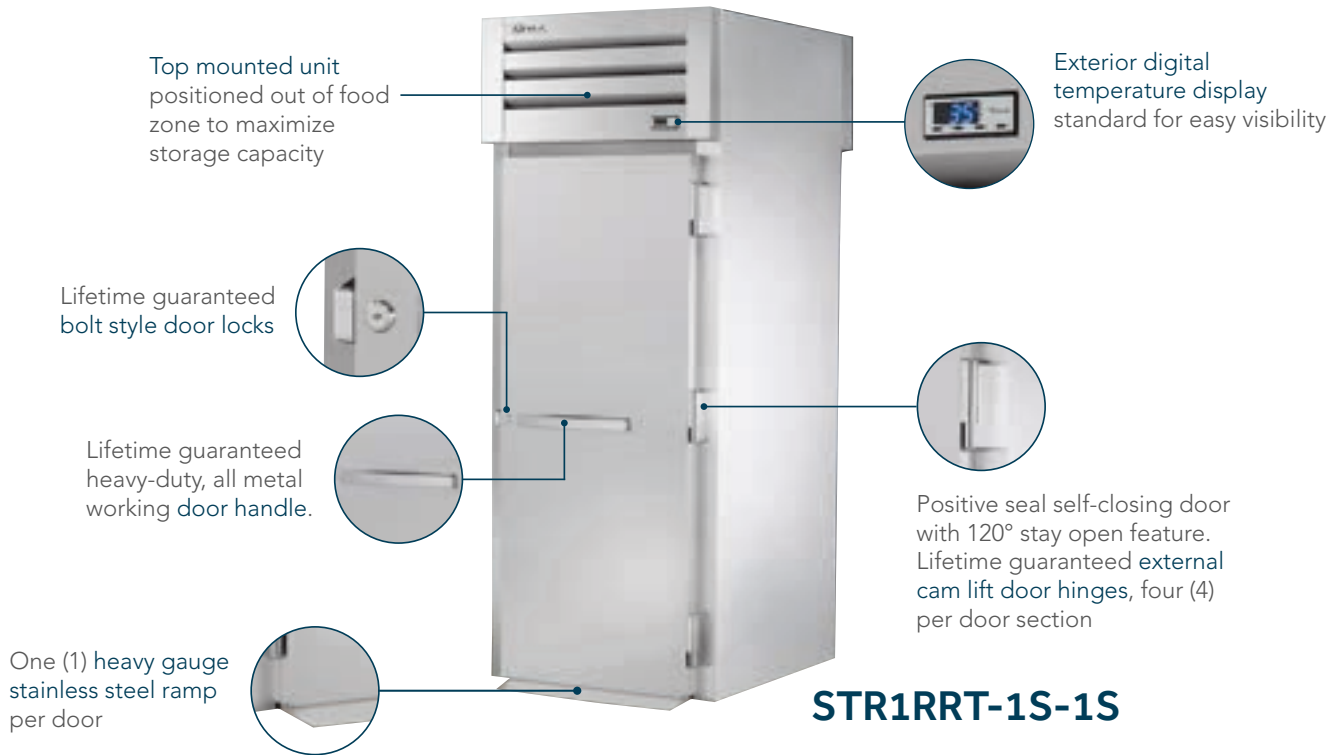

STR1RRI-1S



STR2RRI-2S



STG2RRT-2G-2S



STR2RRI89-1S

## Features/Benefits

- Maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- Accepts roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 66"H (686mm x 737mm x 1677mm). STR/STA/STG1RRI89-1S and STR/STA/STG2RRI89-2S accept roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 72"H (686mm x 737mm x 1,829mm) (supplied by others).
- Factory engineered, self-contained, refrigeration system with capillary tube using environmentally-friendly (CFC free) 134A refrigerant.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Incandescent interior lighting.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- Self-contained system.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.



## STR/STA/STG ROLL-IN REFRIGERATORS

Model	# of Doors	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>						
STR1RRI-1S	1	1/3	8.9	470 (214)	35 x 34 3/4 x 83 3/4	889 x 883 x 2128
STR2RRI-2S	2	1/2	11.8	770 (350)	68 x 34 3/4 x 83 3/4	1728 x 883 x 2128
<b>GLASS DOORS</b>						
STR1RRI-1G	1	1/3	8.9	455 (207)	35 x 34 3/4 x 83 3/4	889 x 883 x 2128
STR2RRI-2G	2	1/2	11.8	760 (345)	68 x 34 3/4 x 83 3/4	1728 x 883 x 2128
<b>SOLID DOOR 89" HIGH</b>						
STR1RRI89-1S	1	1/3	8.9	450 (205)	35 x 34 3/4 x 88 3/4	889 x 883 x 2255
STR2RRI89-2S	2	1/2	11.8	805 (366)	68 x 34 3/4 x 88 3/4	1728 x 883 x 2255

† Depth does not include 4 1/4" (108 mm) for ramp.

\* Height does not include 1/4" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

## STR/STA/STG ROLL-THRU REFRIGERATORS

Model	# of Doors	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>						
STR1RRT-1S-1S	1 fr / 1 bk	1/3	8.9	540 (245)	35 x 37 1/2 x 83 3/4	889 x 953 x 2128
STR2RRT-2S-2S	2fr / 2bk	1/2	9.5	870 (395)	68 x 37 1/2 x 83 3/4	1728 x 953 x 2128
<b>GLASS FRONT/SOLID REAR DOOR</b>						
STR1RRT-1G-1S	1 fr / 1 bk	1/3	8.9	540 (245)	35 x 37 1/2 x 83 3/4	889 x 953 x 2128
STR2RRT-2G-2S	2fr / 2bk	1/2	9.5	710 (323)	68 x 37 1/2 x 83 3/4	1728 x 953 x 2128
<b>SOLID DOOR 89" HIGH</b>						
STR1RRT89-1S-1S	1 fr / 1 bk	1/3	8.9	540 (245)	35 x 37 1/2 x 88 3/4	889 x 953 x 2255
STR2RRT89-2S-2S	2fr / 2bk	1/2	9.5	760 (345)	68 x 37 1/2 x 88 3/4	1728 x 953 x 2255

† Depth does not include 4 1/4" (108 mm) for ramp.

\* Height does not include 1/4" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

# Bottom Mount Reach-Ins | T-Series® Freezers

## REACH-IN FREEZERS

*Solid & Glass, Full & Half Door*



T-12F-HC~FGD01



T-19FZ-HC



T-49F-4-HC



T-72F-HC

## Features/Benefits

- -10°F (-23.3°C) product temperature (air off evaporator coil, -20°F (-28.9°C) holds frozen food and ice cream (T-19FZ-HC maintains 0°F (-18°C)).
- Exterior - Stainless steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum with stainless steel floor.
- Large evaporator and coil heater permit short defrost cycles.
- Automatic defrost system.
- Energy efficient, triple pane, thermal insulated glass doors.
- 4" (102mm) diameter castors standard (leg levelers standard for T-12-HC & T-12FG-HC~FGD01; 2.5" (64mm) diameter castors standard equipment for T-19F-HC & T-19FG-HC~FGD01).
- Door hinges and torsion type closure system.
- 6" (153mm) Legs available for most models (6" (153mm) seismic legs only available on T-12F-HC & T-12FG-HC~FGD01).
- LED interior lighting. Safety shielded.
- Recessed door handles on solid door models.
- Alternative hinge orientation available on most T-23F/49F/72F models. Contact factory for specifics.

### FLX models...

- Easily converts from freezer to refrigerator with the flip of a switch.

**TRADITIONAL REACH-IN FREEZER**

truemfg.com



## T-SERIES® TRADITIONAL REACH-IN FREEZERS

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
T-12F-HC	1	3	½	4.5	170 (78)	24⅞ x 23⅞ x 63⅞	632 x 588 x 1604
T-19F-HC	1	3	½	3.7	265 (120)	27 x 24½ x 75¼	686 x 623 x 1912
T-23F-HC	1	3	½	3.7	295 (134)	27 x 29½ x 78¾	686 x 750 x 1991
T-35F-HC	2	6	1	9.6	390 (177)	39½ x 29½ x 78¾	1004 x 750 x 1991
T-43F-HC	2	6	1	9.6	410 (186)	47 x 29½ x 78¾	1194 x 750 x 1991
T-49F-HC	2	6	1	9.6	480 (218)	54⅞ x 29½ x 78¾	1375 x 750 x 1991
T-72F-HC	3	9	¾	14.0	650 (295)	78⅞ x 29½ x 78¾	1985 x 750 x 1991
<b>0° SOLID DOOR FREEZER</b>							
T-19FZ-HC	1	3	½	3.7	270 (123)	27 x 24½ x 75¼	686 x 623 x 1912
<b>GLASS DOORS</b>							
T-12FG-HC~FGD01	1	3	½	4.5	255 (116)	24⅞ x 23¼ x 63	632 x 591 x 1600
T-23FG-HC~FGD01	1	3	¾	6.2	330 (150)	27 x 29⅞ x 78¾	686 x 759 x 1991
T-49FG-HC~FGD01	2	6	(2) ½	9.5	605 (275)	54⅞ x 29¾ x 78¾	1375 x 756 x 1991
T-72FG-HC~FGD01	3	9	¾	13.0	805 (366)	78⅞ x 29¾ x 78¾	1985 x 756 x 1991
<b>SOLID HALF DOORS</b>							
T-23F-2-HC	2	3	½	3.7	300 (137)	27 x 29½ x 78¾	686 x 750 x 1991
T-49F-4-HC	4	6	1	9.6	480 (218)	54⅞ x 29½ x 78¾	1375 x 750 x 1991

† Depth does not include 1⅝" (42 mm) for glass door handles or ½" (13 mm) for system mechanical components.

\* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs (3¼" (83mm) castor height for T-19F-HC).

\* Height on T-12F-HC & T-12FG-HC~FGD01 does not include 1" (26mm) for upper door hinge.

note: T-12F-HC & T-12FG-HC~FGD01 standard with leg levelers, optional 2½" (64mm) diameter castors and 6" (153mm) seismic legs available, 6" (153mm) legs not available.

## FLX REACH-IN CONVERTIBLE REFRIGERATOR/FREEZER

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
T-19F-FLX-HC	1	3	½	3.7	255 (116)	27 x 24½ x 75¼	686 x 623 x 1912
T-23F-FLX-HC	1	3	½	3.7	295 (134)	27 x 29½ x 78¾	686 x 750 x 1991
T-35F-FLX-HC	2	6	¾	6.0	390 (176)	39½ x 29½ x 78¾	1004x750x1991
T-49F-FLX-HC	2	6	1	9.6	480 (218)	54⅞ x 29½ x 78¾	1375 x 750 x 1991
<b>GLASS DOORS</b>							
T-23FG-FLX-HC~FGD01	1	3	½	6.2	330 (150)	27 x 29⅞ x 78¾	686 x 756 x 1991
T-49FG-FLX-HC~FGD01	2	6	(2) ½	9.5	650 (295)	54⅞ x 29¾ x 78¾	1375 x 756 x 1991

† Depth does not include 1⅝" (35 mm) for door handles or ½" (13 mm) for system mechanical components.

\* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs (3¼" (83mm) castor height for T-19F-FLX-HC).



# Bottom Mount Reach-Ins | TS Series Freezers

## STAINLESS STEEL FREEZERS

*Solid & Glass, Full & Half Door*



TS-23F-HC



TS-23F-2-HC



TS-49FG-HC-FGD01



TS-72FG-HC-FGD01

## Features/Benefits

- True's "TS" series is the choice for the exclusive stainless steel commercial application. Designed with enduring quality that protects your long-term investment, and oversized refrigeration that guarantees exceptional food preservation.
  - Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
  - Maintains -10°F (-23.3°C) product temperatures.
  - Large evaporator and coil heater permit short defrost cycle on freezers.
  - Automatic defrost system.
  - Energy efficient, triple pane, thermal insulated glass doors.
  - Adjustable, heavy-duty, PVC-coated wire shelves.
  - LED interior lighting. Safety shielded.
  - Alternative hinge orientation available on most TS-23/49/72 models. Contact factory for specifics.
  - A "no-stoop", lower shelf.
  - Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
  - Compressor can be serviced easily, and accessed by a single repairman.
- FLX models...**
- Easily converts from freezer to refrigerator with the flip of a switch.

TRADITIONAL REACH-IN FREEZER

truemfg.com



## TS SERIES REACH-IN FREEZERS

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
TS-23F-HC	1	3	½	3.7	310 (141)	27 x 29½ x 78¾	686 x 750 x 1991
TS-35F-HC	2	6	1	9.6	455 (207)	39½ x 29½ x 78¾	1004 x 750 x 1991
TS-43F-HC	2	6	1	9.6	410 (186)	47 x 29½ x 78¾	1194 x 750 x 1991
TS-49F-HC	2	6	1	9.6	515 (234)	54½ x 29½ x 78¾	1375 x 750 x 1991
TS-72F-HC	3	9	¾	14.0	650 (295)	78½ x 29½ x 78¾	1985 x 750 x 1991
<b>GLASS DOORS</b>							
TS-23FG-HC~FGD01	1	3	¾	6.2	330 (150)	27 x 29¾ x 78¾	686 x 759 x 1991
TS-49FG-HC~FGD01	2	6	½	11.0	605 (275)	54½ x 29¾ x 78¾	1375 x 756 x 1991
TS-72FG-HC~FGD01	3	9	¾	13.0	760 (345)	78½ x 29¾ x 78¾	1985 x 756 x 1991
<b>SOLID HALF DOORS</b>							
TS-23F-2-HC	2	3	½	3.7	330 (150)	27 x 29½ x 78¾	686 x 750 x 1991
TS-49F-4-HC	4	6	1	9.6	440 (200)	54½ x 29½ x 78¾	1375 x 750 x 1991

† Depth does not include 1¾" (35 mm) for door handles (glass door models only).

\* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

note: TS-49F-HC, TS-72F-HC, TS-49FG-HC~FGD01, TS-72FG-HC~FGD01 completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 20 amp dedicated outlet.

## TS SERIES FLX REACH-IN CONVERTIBLE REFRIGERATOR/FREEZER

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
TS-23F-FLX-HC	1	3	½	3.7	315 (143)	27 x 29½ x 78¾	686 x 750 x 1991
TS-35F-FLX-HC	2	6	¾	6.0	455 (207)	39½ x 29½ x 78¾	1004x750x1991

† Depth does not include 1¾" (35 mm) for door handles or ½" (13 mm) for system mechanical components.

\* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.



## REACH-IN GASTRONORM FREEZERS

### *Solid Doors*



Dual tray slide system with wire shelves (accommodates two (2) 12" (305mm) x 20" (508mm) food storage pans)



**TGN-2F-2S**

4" (102mm) diameter castors standard. Optional legs available



**TGN-1F-1S**

## Features/Benefits

- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Maintains -10°F to 5°F (-23.3°C to -15°C) temperatures.
- Energy efficient, thermal insulated glass doors.
- Barrel door locks
- Exterior - Stainless steel front. Aluminum ends and GalFan back and top.
- Interior - Clear coated aluminum, stainless steel floor.
- Exterior temperature display.
- Field reversible door hinging.
- Energy efficient, thermal insulated glass doors.
- LED interior lighting.
- A "no-stoop", lower shelf.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.



## TGN® REACH-IN FREEZERS

Model	# of Doors	# of Shelves	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
TGN-1R-1S	1	3	¼	2.2	285 (130)	27 x 29½ x 78¾	686 x 750 x 1991
TGN-2R-2S	2	6	¼	5.9	520 (236)	57¾ x 33¾ x 78½	1464 x 861 x 1994

† Depth does not include 1¾" (44 mm) for door handles or ½" (13 mm) for rear mechanical components.  
 \* Height does not include 5" (127mm) for castors.

## TGN® TRAY SLIDE SYSTEMS



**Standard Tray Slide**  
 will allow a food storage pan to be placed under the shelf



**Universal Tray Slides**  
 16 ga. stainless steel  
 Angle type for bottom support of:  
 (1) 18" x 26" pan or  
 (2) 14" x 18" pans or  
 (2) 12" x 20" pans



**Angle Tray Slides**  
 16 ga. stainless steel  
 Angle type for bottom support of:  
 (1) 18" x 26" pan or  
 (2) 14" x 18" pans

Note: Up to two (2) options can be used in unit.

# Top Mount Reach-Ins | SPEC SERIES® Freezers

## STR/STA/STG REACH-IN & PASS-THRU FREEZERS

*Solid & Glass, Full & Half Door*



**STR1F-1S-HC**



STR1F-2HS-HC



STA1FPT-1S-1S-HC



STG2F-4HS-HC



STR3F-3S-HC

## Features/Benefits

- Maintains cabinet -10°F (-23.3°C) temperatures. Ideal for both frozen foods and ice cream.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Automatic defrost system time-initiated, temperature-terminated. Saves energy consumption and provides shortest possible defrost cycle.
- Automatic evaporator fan motor delay during defrost cycle.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units. (optional on STA/STG units).
- LED interior lighting, safety shielded.
- Energy efficient, triple pane, thermal insulated glass doors.
- Extruded, aluminum door frames on glass doors.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.



## STR/STA/STG REACH-IN FREEZERS

Model	# of Doors	# of Shelves STA/STG models	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
STR1F-1S-HC	1	3	½	6.0	450 (205)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2F-2S-HC	2	6	1¼	9.4	675 (307)	52⅝ x 33¾ x 77¾	1337 x 858 x 1975
STR3F-3S-HC	3	9	(2) ¾	13.8	980 (445)	77¾ x 33¾ x 77¾	1975 x 858 x 1975
<b>SOLID HALF DOORS</b>							
STR1F-2HS-HC	2	3	½	6.0	410 (186)	27½ x 33¾ x 77¾	699 x 858 x 1975
STR2F-4HS-HC	4	6	1¼	9.4	704 (320)	52⅝ x 33¾ x 77¾	1337 x 858 x 1975
STR3F-6HS-HC	6	9	(2) ½	13.8	936 (425)	77¾ x 33¾ x 77¾	1975 x 858 x 1975
<b>GLASS DOORS</b>							
STR1F-1G-HC	1	3	1	8.9	520 (236)	27½ x 33¾ x 77¾	699 x 858 x 1975
<b>GLASS HALF DOORS</b>							
STR1F-2HG-HC	2	3	1	8.9	410 (186)	27½ x 33¾ x 77¾	699 x 858 x 1975

† Depth does not include 1½" (39 mm) for door handles.

\* Height does not include 6⅞" (156mm) for castors or 6" (153mm) for optional legs

\* Height does not include ¼" (7mm) for system mechanical components.

‡ Require 208-230/60Hz, single phase, NEMA 6-15R.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

## STR/STA/STG PASS-THRU FREEZERS

Model	# of Doors	# of Shelves STA/STG models	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>							
STR1FPT-1S-1S	1 fr / 1 bk	3	¾	8.7	410 (186)	27½ x 36⅞ x 77¾	699 x 918 x 1975
<b>SOLID HALF DOORS</b>							
STR1FPT-2HS-2HS	2 fr / 2 bk	3	¾	8.7	410 (186)	27½ x 36⅞ x 77¾	699 x 918 x 1975

† Depth does not include 1½" (39 mm) for door handles.

\* Height does not include 6⅞" (156mm) for castors or 6" (153mm) for optional legs

\* Height does not include ¼" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

### Series Shelving

**STR Series Shelving** - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

**STA Series Shelving** - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

**STG Series Shelving** - (3) heavy-duty, PVC-coated wire shelves per section.

(4) different interior kits available.

See "Spec Series accessories" (pg. 211) for additional details.

# Top Mount Reach-Ins | SPEC SERIES® Freezers

## STR/STA/STG ROLL-IN FREEZERS

*Solid & Glass, Full Doors*

Top mounted unit positioned out of food zone to maximize storage capacity

Lifetime guaranteed bolt style door locks

Lifetime guaranteed heavy-duty, all metal working door handles

Positive seal self-closing door with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, three (3) per full door section

Exterior digital temperature display standard for easy visibility

**STR1FRI-1S**

One (1) heavy gauge stainless steel ramp per door

**STR2FRI-2S**

## Features/Benefits

- An ideal -10°F (-23.3°C) for roll-in racks supporting frozen food and ice cream.
- Accepts roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 66"H (686mm x 737mm x 1677mm). STR/STA/STG1RRI89-1S and STR/STA/STG2RRI89-2S accept roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 72"H (686mm x 737mm x 1,829mm) (supplied by others).
- Factory engineered, self-contained, refrigeration system with capillary tube using environmentally-friendly 404A refrigerant.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Incandescent interior lighting.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.
- Automatic defrost system time-initiated, temperature-terminated.
- Automatic evaporator fan motor delay during defrost cycle.



## STR/STA/STG ROLL-IN FREEZERS

Model	# of Doors	HP	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>						
STR1FRI-1S	1	¾	12.0	410 (186)	35 x 34¾ x 83¾	889 x 883 x 2128
STR2FRI-2S ‡	2	1½	8.0	770 (350)	68 x 34¾ x 83¾	1728 x 883 x 2128

† Depth does not include 4¼" (108 mm) for ramp.

\* Height does not include ¼" (7mm) for system mechanical components.

‡ Requires 115/208-230/60/1 Hz, single phase, 15 amp dedicated outlet.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

# Bottom Mount Reach-Ins | DT - Dual Temperature

## DT Series

### Solid & Glass Full & Half Door Dual Temperature



T-23DT-G-HC-FGD01



T-49DT-HC




T-49DT-4-HC

## Features/Benefits

- True's dual temperature models are equipped with two, independent, factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration systems.
- Refrigerator holds 33°F to 38°F (0.5°C to 3.3°C) temperature. Freezer holds -10°F (-23.3°C).
- Exterior - Stainless steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum with stainless steel floor.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- LED interior lighting. Safety shielded.
- Lifetime guaranteed recessed door handles on solid door models.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door refrigerator models. Energy efficient, triple pane, thermal insulated glass doors on glass door freezer models.
- T23DT models feature refrigerator on top, freezer on bottom. T-49DT models feature refrigerator on left, freezer on right.
- T-49DT Freezer compartments feature standard backguard to improve airflow.
- Automatic defrost system.
- A "no-stoop", lower shelf.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.

TRADITIONAL REACH-IN DUAL TEMP

truemfg.com



## DT SERIES DUAL TEMPERATURE REFRIGERATOR/FREEZERS

Model	# of Doors	# of Shelves	HP Ref.	HP Frz.	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID DOORS</b>								
T-23DT-HC	2	3	1/10	1/4	4.1	335 (152)	27 1/8 x 29 7/8 x 78 3/8	687 x 757 x 1991
T-49DT-HC	2	6	1/4	1/2	6.4	510 (232)	54 1/8 x 29 1/2 x 78 3/8	1375 x 750 x 1991
<b>SOLID HALF DOORS</b>								
T-49DT-4-HC	4	6	1/4	1/2	6.4	510 (232)	54 1/8 x 29 1/2 x 78 3/8	1375 x 750 x 1991
<b>GLASS DOORS</b>								
T-23DT-G-HC~FGD01	2	3	1/10	1/2	6.3	380 (173)	27 x 29 3/4 x 78 3/8	686 x 756 x 1991


† Depth does not include 1 3/8" (35 mm) for door handle(T-23DT-G-HC~FGD01 only).

\* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

# Top Mount Reach-Ins | SPEC SERIES® Dual Temperature

## STR/STA/STG DUAL TEMPERATURE

*Solid, Full & Half Doors*

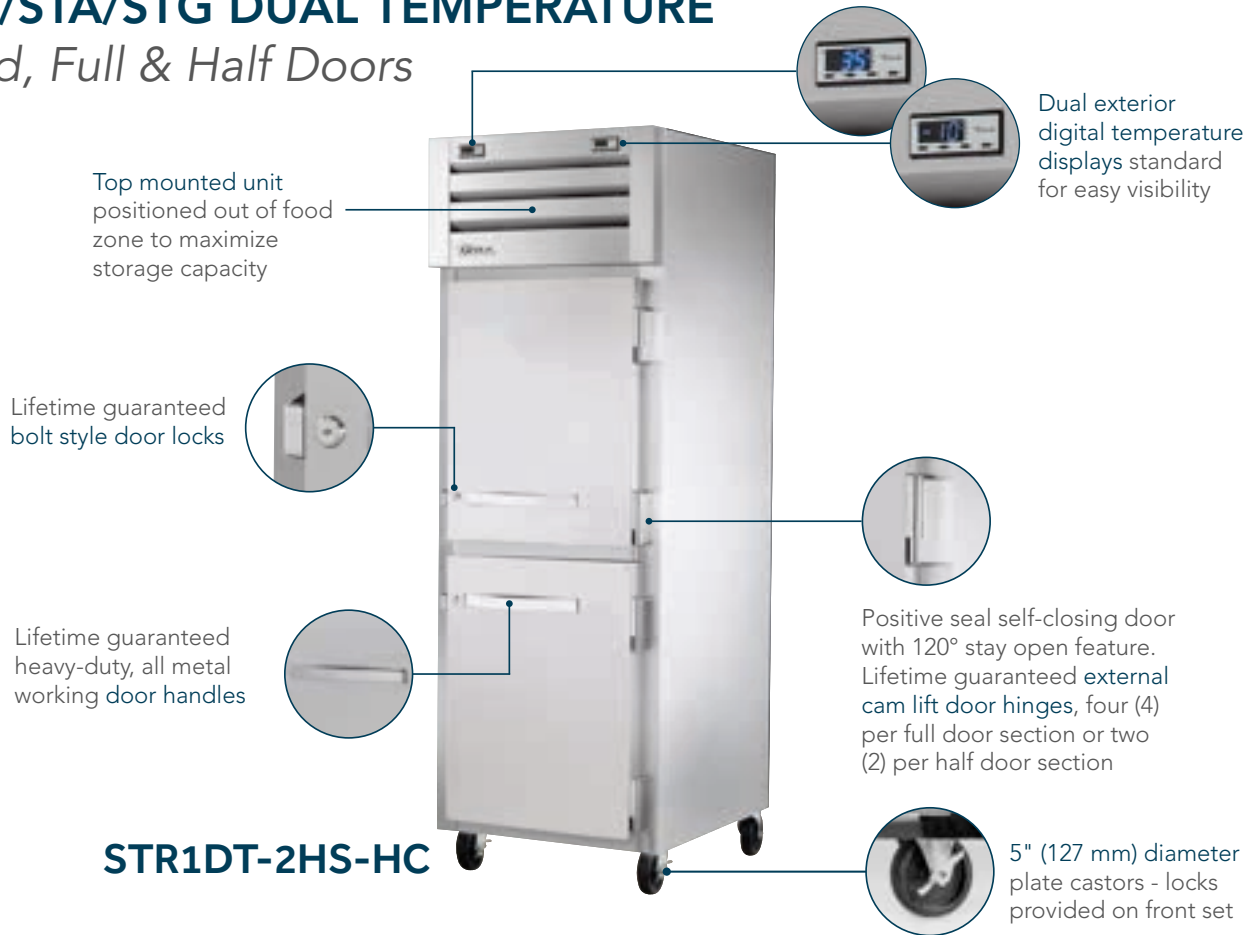

**STR1DT-2HS-HC**



STR1DTA-2HS-HC



STA2DT-2S



STA2DT-4HS

## Features/Benefits

- Refrigerator section holds 33°F to 38°F (0.5°C to 3.3°C) temperature. Freezer section holds -10°F (-23.3°C).
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Automatic defrost system time-initiated, temperature-terminated. Saves energy consumption and provides shortest possible defrost cycle.
- Automatic evaporator fan motor delay during defrost cycle.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units. (optional on STA/STG units).
- LED interior lighting, safety shielded.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door refrigerator models.
- Energy efficient, triple pane, thermal insulated glass doors on glass door freezer models.
- Extruded, aluminum door frames on glass doors.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.
- Self-contained system.

**SPEC SERIES® DUAL TEMP**

truemfg.com



## STR/STA/STG DUAL TEMPERATURE REFRIGERATOR/FREEZERS

Model	# of Doors	# of Shelves	HP Ref.	HP Frz.	Amps	Crated Weight lb. (kg.)	Cabinet Dimensions W D† H* (in)	Cabinet Dimensions W D† H* (mm)
<b>SOLID FULL &amp; HALF DOORS</b>								
STR1DT-2HS-HC	2	3	1/10	1/4	3.7	500 (227)	27 1/2 x 33 3/4 x 77 3/4	699 x 858 x 1975
STR1DTA-2HS-HC	2	3	1/10	1/4	3.7	420 (191)	27 1/2 x 33 3/4 x 77 3/4	699 x 858 x 1975
STR2DT-2S	2	6	1/5	1/2	12.0	760 (345)	52 5/8 x 33 3/4 x 77 3/4	1337 x 858 x 1975
STR2DT-4HS	4	6	1/5	1/2	11.6	665 (302)	52 5/8 x 33 3/4 x 77 3/4	1337 x 858 x 1975

† Depth does not include 1 1/2" (39 mm) for door handles.

\* Height does not include 6 1/8" (156mm) for castors or 6" (153mm) for optional legs

\* Height does not include 1/4" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

### Series Shelving

**STR Series Shelving** - (1) interior kit option included per full section at no charge.  
(4) different interior kits available.

**STA Series Shelving** - (3) heavy-duty, chrome-plated wire shelves per section.  
(4) different interior kits available.

**STG Series Shelving** - (3) heavy-duty, PVC-coated wire shelves per section.  
(4) different interior kits available.

See "Spec Series accessories" (pg. 211) for additional details.



# REACH-IN REFRIGERATION

Flexible. Adaptable. Reliably cold. True upright reach-ins have been the chef's companion in commercial kitchens around the world for over 40 years. Every combination imaginable of solid or glass, with multiple temperature ranges, and available in a variety of sizes, provides cold storage for any application.