



Door Post Repair



STOP! All work detailed in these instructions must be done by a qualified technician.



Subject: Door Post Repair

Date: May 30, 2023

Models / Parts Affected: TI

Voltages: All Voltages

Overview

This document describes repairing a broken door post on TI appliances.

Kit Components

- (1) Door Boss

Required Tools

Required tools include (but may not be limited to) the following:

- Phillips Screwdriver or Bit Driver
- Flat Blade Screwdriver or Bit Driver
- Sandpaper OR
- Chisel
- 3/8" Tap
- 5/16" Drill Bit
- Drill
- Loctite 431

Installation

1. Open the front door.
2. Slide the top panel backwards.
3. Flatten the surface around the existing hole. See fig. 1.
4. Remove the top bracket mount screw indicated in fig. 2.
5. With a 5/16" drill bit, drill out the existing hole approximately 3/4" (19 mm). See fig. 3.
6. Tap the drilled hole. See fig. 4.
7. Clear the drilled hole of debris.
8. Apply Loctite 431 to the door boss' threads. Then, install the door boss. See fig. 5.
9. Reinstall the top bracket mount screw.
10. Reposition the top panel.
11. Close the front door.



Fig. 1. Top door post hole.



Fig. 2. Remove the indicated screw.



Fig. 3. Drill out the existing hole.



Fig. 4. Tap the hole.

Questions or Concerns

For more information, please contact our Technical Service team. See contact information below.

Contact Us

Warranty Phone: +1 855-299-3510

Warranty Email:

CommercialIceWarrantyInquiries@TrueMfg.com

Technical Phone: +1 888-783-1429

Technical Email: CommercialIce@TrueMfg.com

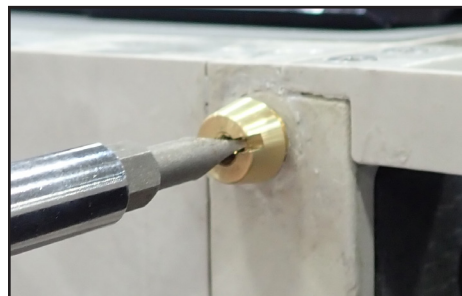


Fig. 5. Install the door boss.