TRUE MANUFACTURING U.S.A. FOODSERVICE D 2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2 Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272	CO., INC. Project Name: DIVISION Location: -2400 Item #: 72-7546 Item #:	AIA # SIS #
Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.true		
Model: G4SM-23RGS-HC~TSL01 Glass Four Sided Me Swing Door Rotating Glass Shelf R		rsion 01
<image/> <image/>	 G4SM-23RGS-HC~TS The world's #1 manufacturer of glass merchandisers. True's commitment to using the highest quality materials and oversis refrigeration systems provides the u with colder product temperatures, a lower utility costs in a unique merch that creates a dynamic 360° product Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydro refrigerant that has zero (0) ozone depletion potential (GWP). Exterior - attractive, high luster copp powder coated finish. Energy efficient, factory balanced, refrigeration system holds 33°F to 38 to 33°C). Interior - attractive, white aluminum interior liner with stainless steel floo Door is self closing with a positive set torsion type closure system. "Low-E", double appethement of the astern (0)? LED interior lighting provides more lighting throughout the cabinet. Saf shielded. Entric cabinet structure is foamed-ir place using a high density, polyureti rusulation that has zero ozone deple potential (GWP). Botom mounted units feature "No stoop" lower shelf to maximize p visibility. Storage on top of cabinet. Easily accessible condenser coil for cleaning. 	s door zed iser and andiser display. ocarbon obal oer 8°F (.5°C n or. eal, in atest in fety hane etion ming
ROUGH-IN DATA Chart din	Specifications subject to change witho mensions rounded up to the nearest %" (millimeters rounded up to next whole	out notice number
Cabinet Dime	nensions	

			Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Doors	Shelves	W	D†	Н	HP	Voltage	Amps		(total m)	(kg)
G4SM-23RGS-HC~TSL01	1	6	27	29¾	78¾	1⁄4	115/60/1	2.4	5-15P	10	385
			686	754	1989	N/A		N/A		3.05	175

† Depth does not include 1%" (42 mm) for door handle.

MADE WITH INNOVATION & USA IN THE USA	APPROVALS:	AVAILABLE AT:
7/23 Printed in U.S.A.		

Model:

Glass Four Sided Merchandiser: *Swing Door Rotating Glass Shelf Refrigerator with*

G4SM-23RGS-HC~TSL01

Hydrocarbon Refrigerant~True Standard Look Version 01

STANDARD FEATURES

DESIGN

- True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in a stylish merchandiser that creates a dynamic 360° product display.
- Attention commanding-revolving glass shelves provide high visibility difference for high profit dessert items.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & 0.02 global warming potential (GWP).
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C).
- Sealed, self-lubricating evaporator fan motors and larger fan blades give True merchandisers a more efficient low velocity, high volume airflow design. This unique design ensures more consistent, colder holding temperatures and faster recovery in high use situations.
- Bottom mounted condensing unit positioned for easy maintenance; "no stoop" lower shelf maximizes visibility by raising merchandised product to higher level.

CABINET CONSTRUCTION

• Exterior - attractive, non-peel or chip copper powder coated cold rolled steel ends with matching cabinet top and back; durable and permanent.

- Low-E, double pane thermal insulated glass sides and door assembly. The latest in energy efficient technology.
- Interior attractive, white aluminum interior liner with stainless steel floor.
- Insulation entire cabinet structure is foamedin-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
 Frame rail fitted with he level as
- Frame rail fitted with leg levelers.
 Illuminated exterior front sign panel
- Illuminated exterior front sign panel. Variety of sign options available.

DOOR

- "Low-E", double pane thermal insulated glass door assembly with extruded aluminum frame. The latest in energy efficient technology.
- Door fitted with 12" (305 mm) long extruded handle.
- Self closing door. Positive seal, torsion type closure system.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

SHELVING

 360° revolving shelf system with 6 nonadjustable 21 ⁵/₈" (220 mm) diameter round shelves; 5 tempered glass and 1 templered mirrored glass. Mirrored shelf designed to be used on bottom level.

LIGHTING


 LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and sign offerings.
- NSF/ANSI Standard 7 compliant for open food product.

ELECTRICAL


 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.

- Black exterior.
- U White exterior.
- □ Black aluminum interior liner.
- □ 6" (153 mm) standard legs.
- □ 6" (153 mm) seismic/flanged legs.
- □ 2½" (64 mm) diameter castors.
- 4" (102 mm) diameter castors.
- □ Red wine thermostat.
- Chocolate thermostat.
- White wine thermostat.
- Barrel Locks located in grill assembly (requires one per door)

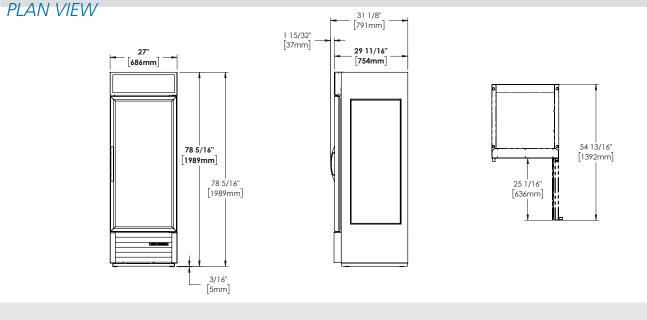

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

E.							
-	KCL	Model	Elevation	Right	Plan	3D	Back
		G4SM-23RGS-HC~TSL01					

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com

