| TRUE MANUFACTURING CO., INC. 0 U.S.A FOODSERVICE DIVISION 2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com | Project Name: Location: Item #: Model #: | Qty: | AIA # |
|---|---|---|--|
| Model: Glass Door Merchandiser: | | | · |
| <page-header><page-header></page-header></page-header> | | DMA-10F-HC~1 The world's #1 manufacturer of gmerchandisers. Designed using the highest qual materials and components to pruser with an attractive, point of gmerchandiser that brilliantly disp frozen food and ice cream, result impulse sales. Factory engineered, self-contain capillary tube system using envir friendly R290 hydro carbon refrig that has zero (0) ozone depletior (ODP), & three (3) global warmin (GWP). High capacity, factory balanced i system that maintains -10°F (-23) temperatures. Ideal for both froz and ice cream. Exterior - non-peel or chip black coated cold rolled steel; durable permanent. Interior - attractive, white alumir liner with stainless steel floor. Self closing door. Positive seal, to closure system. LED interior lighting provides may lighting throughout the cabinet, shielded. Triple pane thermal glass door ar with mitered plastic channel framer with stain that sero ozone depotential (ODP) and zero global to potential (GWP). Dittom mounted units feature "No stoop" lower shelf to maximi visibility. Easily accessible condenser coil for a subject to change with that that a subject to change with the cabinet with that a subject to change with the subject to change with the subject to change with that that a subject to change with the subject to change with that a subject to change with that that a subject to change with that that a subject to change with that that a | TSLO1 Ilass door ity by de the bays ing in high ed, ronmentally gerant g potential g p |

| | | | C | Chart dim | ensions re | ounded | up to the nearest 1⁄8" (| | | up to next wh | |
|------------------|-------|---------|--|-----------|------------|--------|--------------------------|------|-------------------------------|----------------------------|------|
| | | | Cabinet Dimensions (inches) (mm) | | | | | NEMA | Cord Length (total ft.) | Crated Weight (lbs.) | |
| Model | Doors | Shelves | W | D† | Н | HP | Voltage | Amps | Config. | (| (kg) |
| GDM-10F-HC~TSL01 | 1 | 3 | 24% | 23 | 531/8 | 1⁄2 | 115/60/1 | 4.5 | 5-15P | 9 | 235 |
| | | | 629 | 584 | 1347 | N/A | | N/A | | 2.74 | 107 |

† Depth does not include 1% (42 mm) for door handle or %" (16 mm) for rear mechanical components.

| IN THE USA | APPROVALS: | AVAILABLE AT: |
|------------------------|------------|---------------|
| 1/24 Printed in U.S.A. | | |

Model:

GDM-10F-HC~TSL01 Swing

Glass Door Merchandiser: Swing Door Freezer with Hydrocarbon Refrigerant~True Standard Look Version 01 True.®

STANDARD FEATURES

DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays frozen food and ice cream.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & 0.02 global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains -10°F (-23.3°C) temperatures. Ideal for both frozen foods and ice cream.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Bottom mounted condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to higher level.
- Automatic defrost system time-initiated, temperature-terminated. Saves energy consumption and provides shortest possible defrost cycle.

CABINET CONSTRUCTION

• Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent.

- Interior attractive, white aluminum liner with stainless steel floor.
- Insulation entire cabinet structure is foamedin-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
- Frame rail fitted with leg levelers.
- Door sign decal. Variety of decal options available.

DOOR

- Triple pane thermal insulated glass door assembly with mitered plastic channel frame.
- Door fitted with 12" (305 mm) long integrated handle.
- Self closing door. Positive seal, torsion type closure system.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

SHELVING

- Three (3) adjustable, heavy duty PVC coated wire shelves 20¹% "L x 16 ¾ "D (529 mm x 426 mm). Four (4) chrome plated shelf clips included per shelf. One (1) PVC coated wire floor rack 22 ½ "L x 17 ½ "D (568 mm x 445 mm).
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on ½" (13 mm) increments.

LIGHTING

• LED interior lighting, safety shielded.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and sign offerings.
- Backguard and floor rack ensure optimum airflow.
- Listed under NSF/ANSI Standard 7 for the storage and/or display of packaged or bottled product.

ELECTRICAL

 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.




OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.

- Left hinge model available.
- □ White exterior.
- Stainless steel exterior.
- Black aluminum interior liner with black shelving.
- □ Stainless steel interior liner.
- □ 2½" (64 mm) diameter castors.
- Novelty baskets.
- Additional shelves.
- Pricing strips.
- Barrel Locks located in grill assembly (requires one per door)

Back



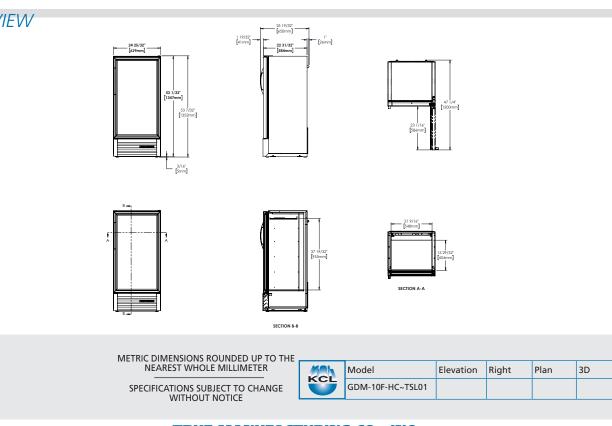

TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com