



|              |          |         |       |
|--------------|----------|---------|-------|
| PROJECT NAME | LOCATION |         | AIA # |
| ITEM #       | QTY      | MODEL # | SIS # |

# SPEC SERIES®

PASS-THRU SOLID HALF FRONT/SOLID HALF REAR SWING DOORS FREEZER

|        |                 |                 |                 |
|--------|-----------------|-----------------|-----------------|
| models | STR1FPT-2HS-2HS | STA1FPT-2HS-2HS | STG1FPT-2HS-2HS |
|--------|-----------------|-----------------|-----------------|



## STR1FPT-2HS-2HS

|          |                                                                       |
|----------|-----------------------------------------------------------------------|
| Exterior | Stainless steel door, front & sides.                                  |
| Interior | Stainless steel side walls, back, floor, door liner, & ceiling.       |
| Shelving | (1) Interior kit option included per full section, factory installed. |

## STA1FPT-2HS-2HS

|          |                                                                 |
|----------|-----------------------------------------------------------------|
| Exterior | Stainless steel door, front & sides.                            |
| Interior | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |
| Shelving | (3) Heavy duty, chrome plated, wire shelves per section.        |

## STG1FPT-2HS-2HS

|          |                                                                 |
|----------|-----------------------------------------------------------------|
| Exterior | Stainless steel door & front, with matching aluminum sides.     |
| Interior | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |
| Shelving | (3) Heavy duty, PVC coated, wire shelves per section.           |

## SPECIFICATIONS

| Dimensions  | in.      | mm.           |
|-------------|----------|---------------|
| Length      | 27½      | 699           |
| Depth       | 36⅞      | 918           |
| Height      | 77¾      | 1975          |
| Electrical  | U.S.     | International |
| Horsepower  | ¾        | N/A           |
| Amps        | 8.7      | N/A           |
| Voltage     | 115/60/1 |               |
| NEMA        | 5-15P    |               |
| Cord Length | 9 ft.    | 2.74 M.       |




115/60/1  
NEMA-5-15R

\* Height does not include 6⅞" (156 mm) for castors or 6" (153 mm) for optional legs. Height does not include ¼" (7mm) for system mechanical components.

† Depth does not include 1½ for front & back door handles.

## plan view

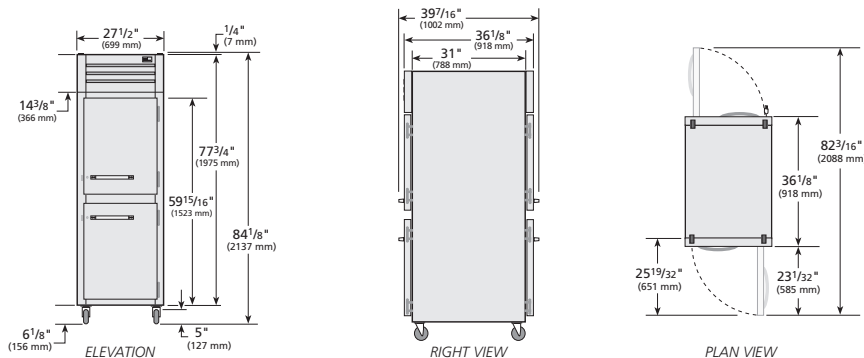

Specifications subject to change without notice.  
Chart dimensions are rounded up to the nearest ⅛" (millimeters rounded up to the next whole number).



APPROVALS

AVAILABLE AT



|              |          |         |
|--------------|----------|---------|
| PROJECT NAME | LOCATION | AIA #   |
| ITEM #       | QTY      | MODEL # |
|              |          | SIS #   |

# SPEC SERIES®

PASS-THRU SOLID HALF FRONT/SOLID HALF REAR SWING DOORS FREEZER

|        |                 |                 |                 |
|--------|-----------------|-----------------|-----------------|
| models | STR1FPT-2HS-2HS | STA1FPT-2HS-2HS | STG1FPT-2HS-2HS |
|--------|-----------------|-----------------|-----------------|



## standard features

### REFRIGERATION SYSTEM

- Factory engineered, self-contained, expansion valve (TXV) system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & 0.02 global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains -10°F (-23.3°C) temperatures. Ideal for both frozen foods and ice cream.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Top mounted refrigeration system with evaporator positioned out of food zone to maximize capacity.
- Automatic defrost system time-initiated, temperature-terminated. Saves energy consumption and provides shortest possible defrost cycle.
- Automatic evaporator fan motor delay during defrost cycle.

### CABINET CONSTRUCTION

- Insulation - Entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

- 5" (127 mm) diameter plate castors - locks provided on front set.

### DOORS

- Lifetime guaranteed bolt style door lock standard.
- Lifetime guaranteed heavy duty all metal working door handles.
- Positive seal self-closing doors with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, four (4) per door section.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

### LIGHTING

- LED interior lighting, safety shielded.

### MODEL FEATURES

- Exterior digital temperature display, available with either °F or °C.
- Evaporator epoxy coated to eliminate the potential of corrosion
- Curb mounting ready.
- NSF-7 compliant for open food product.

### ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.

### OPTIONAL FEATURES/ ACCESSORIES

*(upcharge & lead times may apply)*

- 6" (153 mm) standard legs.
- 6" (153 mm) seismic/flanged legs.
- 6" (153 mm) stainless steel legs.

- Additional shelves.
- Field reversible hinge.

### SHELVING KIT OPTIONS

- STR series kits factory installed at no charge. STA & STG series kits field installed, upcharge applies, lead times may apply.
- Kit #1: Nine (9) sets of #1 type tray slides and pilasters (field installed), bottom support of one (1) 18"L x 26"D (458 mm x 661 mm) pan or two (2) 14"L x 18"D (356 mm x 458 mm) pans.
- Kit #2: One (1) set half-section #2 steel rod tray slides and pilasters (field installed), rim support of one (1) 18"L x 26"D (458 mm x 661 mm) pan.
- Kit #3: Six (6) sets of universal type tray slides and pilasters (field installed), bottom support of one (1) 18"L x 26"D (458 mm x 661 mm) pan, two (2) 14"L x 18"D (356 mm x 458 mm) pans or two (2) 12"L x 20"D (305 mm x 508 mm) pans.
- Kit #4: Three (3) chrome shelves 25"L x 27 ¾"D (635 mm x 705 mm). Optional wall mounted shelf support pilasters (field installed) with four (4) shelf clips per shelf available; adjustable on ½" (13 mm) increments (must order at time of cabinet order).
- Additional kit option components available individually.

METRIC DIMENSIONS ROUNDED UP TO THE  
NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE  
WITHOUT NOTICE



| Model             | Elevation | Right | Plan | 3D | Back |
|-------------------|-----------|-------|------|----|------|
| ST( )1FPT-2HS-2HS |           |       |      |    |      |