



| | | | |
|--------------|----------|---------|-------|
| PROJECT NAME | LOCATION | | AIA # |
| ITEM # | QTY | MODEL # | SIS # |

SPEC SERIES®

PASS-THRU SOLID FRONT/SOLID REAR SWING DOORS REFRIGERATOR WITH HYDROCARBON REFRIGERANT

| | | | |
|--------|------------------|------------------|------------------|
| models | STR2RPT-2G-2S-HC | STA2RPT-2G-2S-HC | STG2RPT-2G-2S-HC |
|--------|------------------|------------------|------------------|



STR2RPT-2G-2S-HC

| | |
|----------|---|
| Exterior | Stainless steel door, front & sides. |
| Interior | Stainless steel side walls, back, floor, door liner, & ceiling. |
| Shelving | (1) Interior kit option included per full section. |

STA2RPT-2G-2S-HC

| | |
|----------|---|
| Exterior | Stainless steel door, front & sides. |
| Interior | Aluminum side walls & back. Stainless steel floor & ceiling. |
| Shelving | (3) Heavy duty, chrome plated, wire shelves per section. |

STG2RPT-2G-2S-HC

| | |
|----------|---|
| Exterior | Stainless steel door, with matching aluminum sides. |
| Interior | Aluminum side walls & back. Stainless steel floor & ceiling. |
| Shelving | (3) Heavy duty, PVC coated, wire shelves per section. |

SPECIFICATIONS


| Dimensions | in. | mm. |
|-------------|------------------|---------------|
| Width | 52 $\frac{5}{8}$ | 1337 |
| Depth | 36 $\frac{1}{8}$ | 918 |
| Height | 77 $\frac{3}{4}$ | 1975 |
| Electrical | U.S. | International |
| Horsepower | $\frac{1}{2}$ | N/A |
| Amps | 5.9 | N/A |
| Voltage | 115/60/1 | |
| NEMA | 5-15P | |
| Cord Length | 9 ft. | 2.74 M. |



115/60/1
NEMA-5-15R

* Height does not include 6 $\frac{1}{8}$ " (156 mm) for castors or 6" (153 mm) for optional legs. Height does not include $\frac{1}{4}$ " (7mm) for system mechanical components.
† Depth does not include 1 $\frac{1}{2}$ for front & back door handles.

plan view

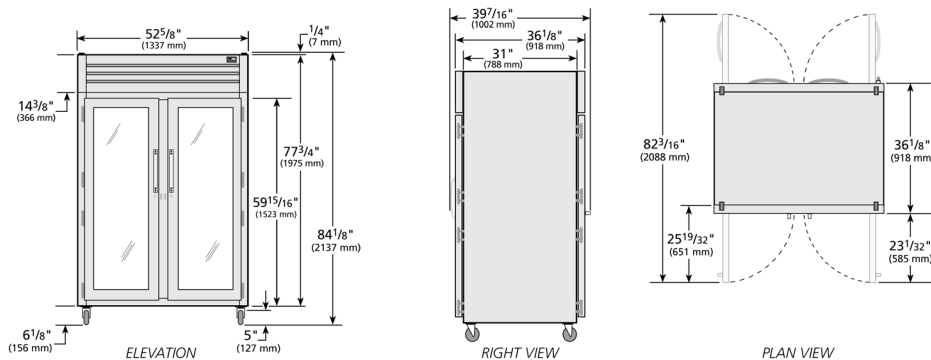

Specifications subject to change without notice.
Chart dimensions are rounded up to the nearest $\frac{1}{8}$ " (millimeters rounded up to the next whole number).



APPROVALS

AVAILABLE AT



| | | |
|--------------|----------|---------|
| PROJECT NAME | LOCATION | AIA # |
| ITEM # | QTY | MODEL # |
| | | SIS # |

SPEC SERIES®

PASS-THRU SOLID FRONT/SOLID REAR SWING DOORS REFRIGERATOR WITH HYDROCARBON REFRIGERANT

models STR2RPT-2G-2S-HC STA2RPT-2G-2S-HC STG2RPT-2G-2S-HC



standard features

REFRIGERATION SYSTEM

- Factory engineered, self-contained, expansion valve (TXV) system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & 0.02 global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Top mounted refrigeration system with evaporator positioned out of food zone to maximize capacity.
- Electronic control.

CABINET CONSTRUCTION

- Insulation - Entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 5" (127 mm) diameter plate castors - locks provided on front set.

DOORS

- Glass door - "Low-E", double pane thermal insulated glass. Solid door - Stainless steel

- Lifetime guaranteed bolt style door lock standard.
- Lifetime guaranteed heavy duty all metal working door handles.
- Positive seal self-closing doors with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, four (4) per door section.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

LIGHTING

- LED interior lighting, safety shielded.

MODEL FEATURES

- Exterior digital temperature display, available with either °F or °C.
- Evaporator epoxy coated to eliminate the potential of corrosion
- Curb mounting ready.
- NSF/ANSI Standard 7 compliant for open food product.

ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.

OPTIONAL FEATURES/ ACCESSORIES

(upcharge & lead times may apply)

- 6" (153 mm) standard legs.
- 6" (153 mm) seismic/flanged legs.
- 6" (153 mm) stainless steel legs.
- Field reversible hinge.
- Additional shelves.
- Security package.

SHELVING KIT OPTIONS

- STR series kits factory installed at no charge. STA & STG series kits field installed, upcharge applies, lead times may apply.
- Kit #1: Nine (9) sets of #1 type tray slides and pilasters (field installed), bottom support of one (1) 18"L x 26"D (458 mm x 661 mm) pan or two (2) 14"L x 18"D (356 mm x 458 mm) pans.
- Kit #2: One (1) set half-section #2 steel rod tray slides and pilasters (field installed), rim support of one (1) 18"L x 26"D (458 mm x 661 mm) pan.
- Kit #3: Six (6) sets of universal type tray slides and pilasters (field installed), bottom support of one (1) 18"L x 26"D (458 mm x 661 mm) pan, two (2) 14"L x 18"D (356 mm x 458 mm) pans or two (2) 12"L x 20"D (305 mm x 508 mm) pans.
- Kit #4: Three (3) chrome shelves 26 5/16"L x 21 5/16"D (669 mm x 548 mm). Optional wall mounted shelf support pilasters (field installed) with four (4) shelf clips per shelf available; adjustable on 1/2" (13 mm) increments (must order at time of cabinet order).
- Additional kit option components available individually.

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



| Model | Elevation | Right | Plan | 3D | Back |
|--------------------|-----------|-------|------|----|------|
| ST()2RPT-2G-2S-HC | | | | | |