

# TRUE MANUFACTURING CO., INC. RETAIL DIVISION

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Na	AIA#	
Location:		
Item #:	Qty:	SIS #
Model #:		

Model:

T-11G-HC~TSL01

T-Series®:

Reach-In Glass Swing Door Refrigerator with Hydrocarbon Refrigerant~True Standard Look Version 01



# T-11G-HC~TSL01

- True's glass door reach-in's are designed with enduring quality that protects your long term investment.
- Designed using the highest quality materials and components to provide the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.
- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydro carbon refrigerant that has zero (0) ozone depletion potential (ODP), & 0.02 global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- Self-Cleaning RCU Technology eliminates the need for cleaning of condenser coil, reduces energy consumption and helps maintain the coldest temperature and freshest product.
- Exterior non-peel or chip black powder coated cold rolled steel; durable and permanent.
- Energy efficient, "Low-E", double pane thermal glass door.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Adjustable, heavy duty PVC coated shelves.
- Positive seal self-closing door. Lifetime guaranteed door hinges and torsion type closure system.

#### **Bottom mounted units feature:**

- "No stoop" lower shelf.
- Storage on top of cabinet.
- Compressor performs in coolest, most grease free area of kitchen.
- Easily accessible condenser coil for cleaning.

## **ROUGH-IN DATA**


Specifications subject to change without notice.

Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

			Cabinet Dimensions (inches) (mm)		es)				NEMA	Cord Length (total ft.)	Crated Weight (lbs.)
Model	Doors	Shelves	W	D†	H*	HP	Voltage	Amps			(kg)
T-11G-HC~TSL01	1	3	191⁄4	21%	70%	1/10	115/60/1	1.6	5-15P	9	220
			487	541	1786					2.74	100

† Depth does not include 1%" (42 mm) for door handle. † Depth does not include 1" (26mm) for rear bumper.

\* Height does not include  $\frac{1}{2}$ " (13mm) for castors.



#### T-11G-HC~TSL01

# T-Series®:

Reach-In Glass Swing Door Refrigerator with Hydrocarbon Refrigerant~True Standard Look Version 01



# STANDARD FEATURES

#### **DESIGN**

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

#### **REFRIGERATION SYSTEM**

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydro carbon refrigerant that has zero (0) ozone depletion potential (ODP), & 0.02 global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Self-Cleaning RCU Technology eliminates the need for cleaning of condenser coil, reduces energy consumption and helps maintain the coldest temperature and freshest product.
- Bottom mounted condensing unit positioned for easy maintenance. Compressor runs in coolest and most grease free area of the kitchen. Allows for storage area on top of unit.

#### **CABINET CONSTRUCTION**

 Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent.

- Interior attractive, white coated aluminum liner. Stainless steel floor with coved corners.
- Insulation entire cabinet structure is foamedin-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
- Base rail fitted with leg levelers (legs not available).
- Door sign decal. Variety of decal options available.

#### **DOOR**

- "Low-E", double pane thermal glass assembly with extruded aluminum frame.
- Door fitted with 15" (381 mm) long extruded aluminum handle.
- Positive seal self-closing door. Lifetime guaranteed door hinges and torsion type closure system.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.
- Door lock standard on grill.

#### **SHELVING**

- Three (3) adjustable, heavy duty PVC coated wire shelves 14 ¾ "L x 15 ½ "D (375 mm x 394 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on ½" (13 mm) increments.

#### LIGHTING

 LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

#### **MODEL FEATURES**

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- · Exterior temperature display on grill.
- NSF/ANSI Standard 7 compliant for open food product.

#### **ELECTRICAL**

 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.




#### **OPTIONAL FEATURES/ACCESSORIES**

Upcharge and lead times may apply.

- ☐ 2½" (64 mm) castors.
- ☐ White exterior.
- ☐ Stainless exterior.
- ☐ Clear aluminum exterior with GalFan back.
- ☐ Additional shelves.
- Black aluminum interior liner with black shelving.
- ☐ Stainless interior liner.
- ☐ Clear Aluminum interior liner with gray shelves.
- ☐ Red wine thermostat
- ☐ White wine thermostat
- ☐ Chocolate thermostat

### PLAN VIEW

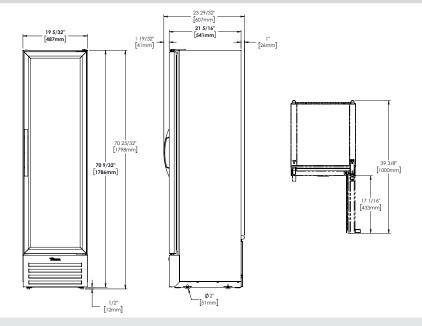

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL	Model	Elevation	Right	Plan	3D	Back
KCL	T-11G-HC~TSL01					