TRUE MANUFACTURING CO., INC.         Image: Construct of the system of	Location: Qty: Item #: Qty:	AIA # 
	<ul> <li>Frue's food prep units at designed with enduring that protects your long investment.</li> <li>Energy saving, environm friendly (R513A), exclusi air refrigeration system to 41°F (.5°C to 5°C).</li> <li>All stainless steel front, tends. Corrosion resistan coated steel back.</li> <li>Heavy-duty flat glass lid pan temperatures colde locks in freshness while maximum product visib</li> <li>Interior - attractive, clear aluminum liner. Stainless floor with coved corners</li> <li>8" (204 mm) deep, ½" (1 thick, full length remova cutting board included. high density white poly provides tough prepara surface.</li> <li>Door fitted with 12" (30) long recessed handle th foamed-in-place with a metal interlock to ensur permanent attachment.</li> <li>Foamed-in-place using a density, polyurethane in that has zero ozone dep potential (ODP) and zero warming potential (GWI)</li> </ul>	e quality term hentally ve forced- holds 33°F cop and t GalFan keeps r and enabling ility. r coated s steel s. (3 mm) able Sanitary, ethylene tion 5 mm) at is sheet e a high isulation letion o global

# ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest ½" (millimeters rounded up to next whole number).

			Pans	Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (Ibs.)	
Model	Doors	Shelves	(top)	W	D†	H*	ΗP	Voltage	Amps	Config.	(total m)	(kg)
TFP-48-18M-FGLID	2	4	18	481⁄8	32¼	37¼	1⁄5	115/60/1	2.9	5-15P	7	TBD
				1223	820	946	N/A		N/A		2.13	TBD

† Depth does not include 2¼" (57 mm) for cutting board.
\* Height does not include ¾" (19 mm) for castors. \* Height does not include 21¼" (550 mm) for open lid. Note: Total height with castors and lid open is 59%" (1515 mm).

		APPROVALS:	AVAILABLE AT:
2/22	Printed in U.S.A.		

#### Model:

## TFP-48-18M-FGLID

# Food Prep Table: Food Prep Unit with Flat Glass Lid



#### DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

#### **REFRIGERATION SYSTEM**

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) R513A refrigerant.
- Energy saving, factory balanced refrigeration system with guided airflow to provide uniform temperature in food pans and cabinet interior.
- Exclusive forced-air design holds 33°F to 41°F (.5°C to 5°C) product temperature in food pans and cabinet interior. Complies with and listed under ANSI/NSF-7.
- High efficiency evaporator fan motor and larger fan blades give True Food Prep units a more efficient, low velocity, high volume airflow design.
- Easy access to all condensing unit components from back of cabinet.

#### **CABINET CONSTRUCTION**

 Exterior - stainless steel front, top and ends. Corrosion resistant GalFan coated steel back.

- Interior attractive, clear coated aluminum liner. Stainless steel floor with coved corners.
- Insulation entire cabinet structure and drawer facings are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 21/2" (64 mm) diameter castors locks provided on front set.
- Solid State Electronic Control, accessible on back of the unit.

#### DOORS

- Stainless steel exterior with clear aluminum liner to match cabinet interior.
- Door fitted with 12" (305 mm) long recessed handle that is foamed-in-place with a sheet metal interlock to ensure permanent attachment.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.
- SHELVING
- Four (4) adjustable, heavy duty PVC coated wire shelves 21 ½ "L x 20"D (547 mm x 508 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on ½" (13 mm) increments.

### **MODEL FEATURES**

• Evaporator is epoxy coated to eliminate the potential of corrosion.

# • 8" (204 mm) deep, full length removable cutting board. Sanitary, high-density white polyethylene provides tough preparation surface.

- Heavy-duty flat glass lid keeps pan temperatures colder and locks in freshness while enabling maximum product visibility.
- Comes standard with 18 (<sup>1</sup>/<sub>8</sub> size) 6<sup>7</sup>/<sub>8</sub> "L x 6<sup>1</sup>/<sub>4</sub>"W x 4"D (175 mm x 159 mm x 102 mm) clear polycarbonate, food pans in countertop prep area.
- Countertop pan opening designed to fit varying size pan configurations with available pan divider bars. Varying size pans supplied by others.
- NSF/ANSI Standard 7 compliant for open food product.


#### ELECTRICAL

 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



## **OPTIONAL FEATURES/ACCESSORIES**

Upcharge and lead times may apply. Pan dividers

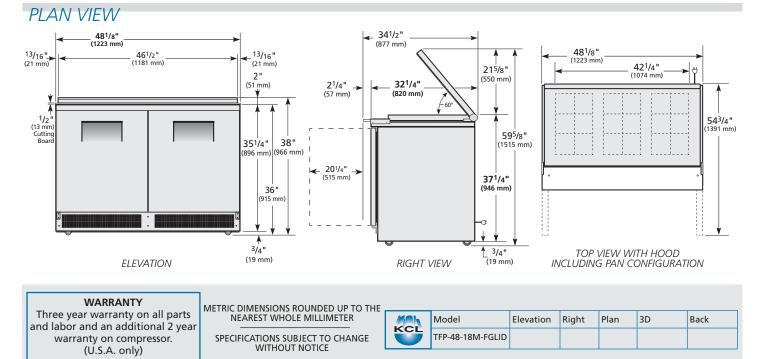

# TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com

