

**True**  
REFRIGERATION

# Fast Facts

 natural  
refrigerant.



CVM® | GDM® | TVM® | TOAM™ | TAC®

The logo for Truwe Refrigeration is centered on a blue gradient background. It features the word "truwe" in a stylized, italicized, lowercase sans-serif font. A horizontal line extends from the left side of the 't' across the top of the letters. Below "truwe" is the word "REFRIGERATION" in a clean, uppercase, sans-serif font. A registered trademark symbol (®) is located to the right of the word "truwe".

*truwe*®  
REFRIGERATION

<b>Top Reasons to Buy True</b> .....	4	GDM-10-58-HC~TSL01 .....	44	GDM-69-HC-LD .....	67
<b>True Flex</b> .....	10	T-11G-HC~TSL01 .....	45	GDM-72-HC~TSL01 .....	68
<b>Dimensions</b> .....	12	GDM-12-HC~TSL01 .....	49	<b>TVM</b> .....	70
<b>International Dimensions</b> .....	15	GDM-14RF-HC-LD .....	47	TVM-30-HC~VM03 .....	72
<b>International Specifications</b> .....	18	GDM-15-RTO-HC-LD .....	48	TVM-30SL-HC-VM03 .....	73
<b>Graphic Signs</b> .....	21	GDM-23-HC~TSL01 .....	49	TVM-36SL-HC~VM03 .....	74
<b>Exterior Finishes</b> .....	24	GDM-26-HC~TSL01 .....	50	TVM-48SL-HC~VM01 .....	75
<b>Doors   Number of Doors Per Cooler</b> .....	25	GDM-33C-60-HC-LD .....	51	TVM-48-HC~VM01 .....	76
<b>CVM</b> .....	26	GDM-33CPT-54-HC-LD .....	52	TVM-48SL-48-HC~VM01 .....	77
CVM-11-HC~EGC01 .....	28	GDM-33-HC-LD .....	53	TVM-48SL-54-HC~VM01 .....	78
CVM-13-HC~EGC01 .....	29	GDM-33SSL-56-HC-LD .....	54	<b>TOAM</b> .....	80
CVM-20-HC~EGC01 .....	30	GDM-35-HC~TSL01 .....	55	TOAM-30-HC .....	82
CVM-24-HC~EGC01 .....	31	GDM-35SL-RF-HC-LD .....	56	TOAM-30GS-HC .....	83
CVM-27-HC~EGC01 .....	32	GDM-41-HC-LD .....	57	TOAM-36-HC-TSL01 .....	84
<b>GDM</b> .....	34	GDM-41C-48-HC-LD .....	58	TOAM-36GS-HC-TSL01 .....	85
GDM-06-34-HC~TSL01 .....	36	GDM-41CPT-48-HC-LD .....	59	TOAM-48-HC .....	86
GDM-06-34-HC~TSL01-EXTTOP .....	37	GDM-41SL-HC-LD .....	60	TOAM-48GS-HC .....	87
GDM-07-HC~FGD01 .....	38	GDM-41SL-48-HC-LD .....	61	TOAM-60-HC .....	88
GDM-08-HC~TSL01 .....	39	GDM-41SL-54-HC-LD .....	62	TOAM-60GS-HC .....	89
GDM-09-SQ-HC-LD .....	40	GDM-41SL-60-HC-LD .....	63	TOAM-72-HC .....	90
GDM-10-HC~TSL01 .....	41	GDM-43-HC~TSL01 .....	64	TOAM-72GS-HC .....	91
GDM-10PT-HC~TSL01 .....	42	GDM-47-HC-LD .....	65	TAC-14GS-HC-LD .....	92
GDM-10SSL-HC~TSL01 .....	43	GDM-49-HC~TSL01 .....	66	<b>Notes</b> .....	93

## Top Reasons to Buy True Refrigeration



**1. Refrigeration System** By matching and balancing hydrocarbon refrigeration with the latest refrigeration components, TRUE engineers environmentally friendly refrigeration systems with shorter run times, lower energy consumption, and the industry's coldest holding temperatures.


TRUE has taken a large step in reducing its carbon footprint with the use of a hydrocarbon refrigerant, R290. R290 is an environmentally friendly refrigerant with a Global Warming Potential (GWP) of 0.02, compared to refrigerants of the past, R404a and R134a, whose GWPs are 3922 and 1430 respectively.



**2. Quality Components** TRUE uses quality components to ensure a long life of refrigeration with minimal energy consumption. State-of-the-art components such as energy-efficient compressors and electrically commutated motors are used to exceed energy standards without sacrificing the workload. LED lights have been introduced in TRUE units to offer a brilliant display while saving energy and reducing heat within.



**3. Self-Cleaning (RCU) Technology** eliminates the need to clean the condenser coil, reduces energy consumption and helps maintain the coldest temperatures and freshest products.

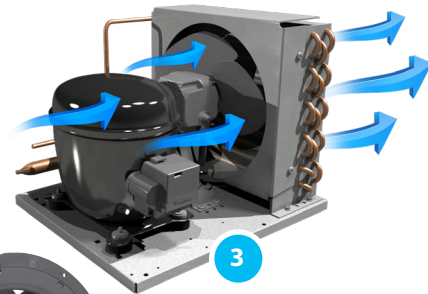

## Top Reasons to Buy True Refrigeration




**4. High-Density Insulation** TRUE continues its commitment to sustainability with the use of foamed-in-place, CFC-free, polyurethane, high-density insulation that provides unparalleled strength and rigidity. In addition to our already industry exceeding insulation factor, our insulation has zero ozone depleting (ODP) and zero global warming potential (GWP).



**5. Durable PVC Coated Shelving** True manufactures its own heavy-duty wire shelves, utilizing larger diameter steel for strength. Shelving is bonded with powdered PVC to prevent chipping and peeling which is prevalent in standard epoxy coated shelves.



**6. After Sale Support** Along with its Warranty. At no additional cost, our customers enjoy the option of having the entire condensing unit replaced. This consists of a new compressor, condenser, start components, and fan motor, all of which are pre-assembled and shipped from the factory.

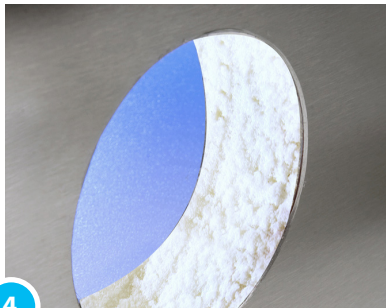

4



5



6

## Top Reasons to Buy True Refrigeration



**7. Energy Efficiency** TRUE is committed to eco-friendly manufacturing by meeting and surpassing energy standards while not sacrificing performance. By using oversized, higher-capacity, balanced refrigeration systems, TRUE outperforms industry efficiency expectations.



**8. 100% Run Testing** In order to verify that all units are manufactured properly and to spec, TRUE runs tests on every single unit as part of the final quality inspection before releasing the unit into the finished goods inventory.



**9. Extensive Availability** In its Missouri-based manufacturing facilities, TRUE builds for inventory to provide a near 100% fill rate on standard items. This allows for the most optimal turnaround when the purchase order is received and processed.



7



8



9

## TrueFlex Available Models

### 6 Bottles Deep\*

CVM-11-HC~EGC01  
CVM-13-HC~EGC01  
GDM-08-HC-TSL01  
GDM-10-HC~TSL01  
GDM-10PT-HC-TSL01  
GDM-10-58-HC~TSL01  
GDM-12-HC~TSL01  
GDM-15 RTO-HC-LD  
GDM-41C-48-HC-LD

### 7 Bottles Deep\*


GDM-14RF-HC-LD  
GDM-33-HC-LD  
GDM-35-HC~TSL01  
GDM-41-HC-LD  
GDM-43-HC~TSL01  
GDM-47-HC-LD  
GDM-49-HC~TSL01  
GDM-69-HC-LD  
GDM-72-HC~TSL01

### 8 Bottles Deep\*

CVM-27-HC~EGC01  
GDM-23-HC~TSL01  
GDM-26-HC~TSL01

\*Based on 20 oz. Bottles

**MODELS**



TrueFlex® Gravity Feed Organizers

## TrueFlex PAC® Available Models

### TrueFlex PAC

CVM-11-HC~EGC01  
CVM-13-HC~EGC01  
GDM-06-34-HC-TSL01  
GDM-10PT-HC~TSL01  
GDM-10-58-HC~TSL01  
GDM-10-HC~TSL01  
GDM-10SSL-HC-TSL01

GDM-12-HC~TSL01  
GDM-33SSL-56-HC-LD  
GDM-41SL-48-HC-LD  
GDM-41SL-60-HC-LD  
TVM-30-HC~VM03  
TVM-30SL-HC~VM03  
TVM-36SL-HC~VM03  
GDM-41SL-54-HC-LD














TrueFlex PAC® Organizers












# BENEFITS












- Double front bars and high side walls prevent bottles from tipping. Back bar prevents bottles from leaning against the back wall of cooler.
- Single glides offer flexibility to display multiple packages on the same shelf.
- Easy to install. TrueFlex® glides snap on to standard wire shelves, making it possible to retrofit older coolers equipped with flat shelves.
- Includes shelf retainer clips that keep shelves from sliding into door. Eliminates zip ties and service calls.
- Enhanced silicon "slip" agent improves gravity feed performance.
- Optimum air flow ensures rapid pull down to serving temperature.
- Can be ordered with the cooler and shipped inside the unit for one stop shopping.














## Dimensions (in)












Model	Dimensions W x D x H
 CVM-11-HC~EGC01	24 <sup>7</sup> / <sub>8</sub> x 22 <sup>7</sup> / <sub>8</sub> x 53 <sup>5</sup> / <sub>8</sub>
 CVM-13-HC~EGC01	24 <sup>7</sup> / <sub>8</sub> x 22 <sup>7</sup> / <sub>8</sub> x 63 <sup>3</sup> / <sub>4</sub>
 CVM-20-HC~EGC01	27 x 24 <sup>1</sup> / <sub>2</sub> x 78 <sup>1</sup> / <sub>2</sub>
 CVM-24-HC~EGC01	27 x 29 <sup>1</sup> / <sub>2</sub> x 78 <sup>1</sup> / <sub>2</sub>
 CVM-27-HC~EGC01	30 x 29 <sup>1</sup> / <sub>2</sub> x 78 <sup>1</sup> / <sub>2</sub>
 GDM-06-34-HC~TSL01	20 <sup>1</sup> / <sub>2</sub> x 26 <sup>3</sup> / <sub>8</sub> x 33 <sup>1</sup> / <sub>2</sub>
 GDM-06-34-HC~TSL01 <small>EXTTOP</small>	20 <sup>3</sup> / <sub>8</sub> x 26 <sup>3</sup> / <sub>8</sub> x 34
 GDM-07-HC~FGD01	24 <sup>1</sup> / <sub>8</sub> x 24 <sup>5</sup> / <sub>8</sub> x 39 <sup>7</sup> / <sub>8</sub>
 GDM-08-HC~TSL01	23 <sup>1</sup> / <sub>2</sub> x 23 x 48
 GDM-09-SQ-HC-LD	36 x 22 <sup>3</sup> / <sub>8</sub> x 39 <sup>3</sup> / <sub>4</sub>
 GDM-10-HC~TSL01	24 <sup>7</sup> / <sub>8</sub> x 22 <sup>7</sup> / <sub>8</sub> x 53 <sup>3</sup> / <sub>8</sub>

Model	Dimensions W x D x H
 GDM-10PT-HC~TSL01	24 <sup>7</sup> / <sub>8</sub> x 25 <sup>1</sup> / <sub>2</sub> x 53 <sup>3</sup> / <sub>8</sub>
 GDM-10SSL-HC~TSL01	24 <sup>7</sup> / <sub>8</sub> x 18 x 53 <sup>1</sup> / <sub>2</sub>
 GDM-10-58-HC~TSL01	24 <sup>7</sup> / <sub>8</sub> x 22 <sup>7</sup> / <sub>8</sub> x 58
 GDM-12-HC~TSL01	24 <sup>7</sup> / <sub>8</sub> x 22 <sup>7</sup> / <sub>8</sub> x 62 <sup>3</sup> / <sub>8</sub>
 GDM-14RF-HC-LD	30 <sup>3</sup> / <sub>8</sub> x 29 <sup>1</sup> / <sub>4</sub> x 58
 GDM-15-RTO-HC-LD	24 <sup>7</sup> / <sub>8</sub> x 24 <sup>5</sup> / <sub>8</sub> x 75
 GDM-23-HC~TSL01	27 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub>
 GDM-26-HC~TSL01	30 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub>
 GDM-33-HC-LD	39 <sup>1</sup> / <sub>2</sub> x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub>
 GDM-33C-60-HC-LD	39 <sup>1</sup> / <sub>2</sub> x 24 <sup>1</sup> / <sub>8</sub> x 59 <sup>3</sup> / <sub>4</sub>
 GDM-33SSL-56-HC-LD	36 x 18 x 56

Model	Dimensions W x D x H
 GDM-35-HC~TSL01	39½ x 29⅞ x 78⅝
 GDM-35SL-RF-HC-LD	39¾ x 24¼ x 58⅞
 GDM-41-HC-LD	47⅞ x 29⅝ x 78⅝
 GDM-41C-48-HC-LD	48 x 24⅞ x 48
 GDM-41CPT-48-HC-LD	48 x 24⅞ x 48
 GDM-41CPT-48-HC-LD	48 x 24⅞ x 48
 GDM-41SL-HC-LD	47⅞ x 24⅞ x 78⅝
 GDM-41SL-48-HC-LD	46⅞ x 21 x 47¾
 GDM-41SL-54-HC-LD	47⅞ x 21 x 54⅞
 GDM-41SL-60-HC-LD	47⅞ x 21 x 59⅞
 GDM-43-HC~TSL01	47⅞ x 29⅞ x 78⅝












Model	Dimensions W x D x H
 GDM-47-HC-LD	54⅞ x 29⅞ x 78⅝
 GDM-49-HC~TSL01	54⅞ x 29⅞ x 78⅞
 GDM-69-HC-LD	78⅞ x 29⅝ x 78⅝
 GDM-72-HC~TSL01	78⅞ x 29⅞ x 78⅝
 TVM-30-HC~VM03	30⅞ x 23⅞ x 54⅞
 TVM-30SL-HC~VM03	30⅞ x 21⅞ x 54⅞
 TVM-36SL-HC~VM01	36 x 21¼ x 55
 TVM-48-HC~VM01	47¼ x 29⅞ x 78⅝
 TVM-48SL-HC~VM01	47⅞ x 25¼ x 78¾
 TVM-48SL-48-HC~VM01	46⅞ x 21 x 48
 TVM-48SL-54-HC~VM01	47⅞ x 21¾ x 53⅞












## Dimensions (in)

Model	Dimensions W x D x H
 TAC-14GS-HC-LD	30 $\frac{1}{4}$ x 32 $\frac{1}{8}$ x 56 $\frac{3}{8}$
 TOAM-30-HC~TSL01	30 x 29 $\frac{1}{4}$ x 80 $\frac{5}{8}$
 TOAM-30GS-HC~TSL01	30 x 29 $\frac{1}{4}$ x 80 $\frac{5}{8}$
 TOAM-36-HC~TSL01	36 x 29 $\frac{7}{8}$ x 78 $\frac{1}{2}$
 TOAM-36GS-HC~TSL01	36 x 29 $\frac{7}{8}$ x 78 $\frac{1}{2}$
 TOAM-48-HC~TSL01	60 x 29 $\frac{7}{8}$ x 78 $\frac{1}{2}$
 TOAM-48GS-HC~TSL01	60 x 29 $\frac{7}{8}$ x 78 $\frac{1}{2}$
 TOAM-60-HC~TSL01	72 x 29 $\frac{7}{8}$ x 78 $\frac{1}{2}$
 TOAM-60GS-HC~TSL01	72 x 29 $\frac{7}{8}$ x 78 $\frac{1}{2}$
 TOAM-72-HC~TSL01	72 x 29 $\frac{7}{8}$ x 78 $\frac{1}{2}$
 TOAM-72GS-HC~TSL01	72 x 29 $\frac{7}{8}$ x 78 $\frac{1}{2}$












Model	Dimensions W x D x H
 T-11G-HC~TSL01	19 $\frac{1}{4}$ x 21 $\frac{3}{8}$ x 70 $\frac{3}{8}$












 R290 Natural Refrigerant












Model	Dimensions W x D x H
 CVM-11-HC~EGC01	630 x 581 x 1360
 CVM-13-HC~EGC01	630 x 581 x 1617
 CVM-20-HC~EGC01	686 x 623 x 1994
 CVM-24-HC~EGC01	686 x 750 x 1994
 CVM-27-HC~EGC01	762 x 747 x 1993
 GDM-06-34-HC~TSL01	519 x 670 x 850
 GDM-06-34-HC~TSL01 <small>EXTTOP</small>	518 x 670 x 863
 GDM-07-HC~FGD01	613 x 626 x 1013
 GDM-08-HC~TSL01	594 x 583 x 1219
 GDM-09-SQ-HC-LD	914 x 567 x 1008
 GDM-10-HC~TSL01	632 x 581 x 1356

Model	Dimensions W x D x H
 GDM-10PT-HC~TSL01	630 x 648 x 1356
 GDM-10SSL-HC~TSL01	632 x 458 x 1359
 GDM-10-58-HC~TSL01	630 x 581 x 1472
 GDM-12-HC~TSL01	632 x 581 x 1585
 GDM-14RF-HC-LD	772 x 743 x 1474
 GDM-15-RTO-HC-LD	632 x 626 x 1905
 GDM-23-HC~TSL01	686 x 759 x 1998
 GDM-26-HC~TSL01	762 x 759 x 1998
 GDM-33-HC-LD	1004 x 753 x 1998
 GDM-33CPT-54-HC-LD	1004 x 613 x 1375
 GDM-33C-60-HC-LD	1004 x 753 x 1998

## International Dimensions (mm)












Model	Dimensions W x D x H
 GDM-33SSL-56-HC-LD	915 x 458 x 1423
 GDM-35-HC~TSL01	1004 x 759 x 1998
 GDM-35SSL-RF-HC-LD	1010 x 616 x 1477
 GDM-41-HC-LD	1197 x 753 x 1998
 GDM-41C-48-HC-LD	1220 x 613 x 120
 GDM-41CPT-48-HC-LD	1220 x 613 x 120
 GDM-41SL-HC-LD	1197 x 613 x 1998
 GDM-41SL-48-HC-LD	1191 x 534 x 1213
 GDM-41SL-54-HC-LD	1197 x 534 x 1375
 GDM-41SL-60-HC-LD	1197 x 534 x 1521
 GDM-43-HC~TSL01	1197 x 759 x 1998












Model	Dimensions W x D x H
 GDM-47-HC-LD	1375 x 753 x 1998
 GDM-49-HC~TSL01	1375 x 759 x 1998
 GDM-69-HC-LD	1985 x 753 x 1998
 GDM-72-HC~TSL01	1985 x 759 x 1998
 TVM-30-HC~VM01	783 x 606 x 1394
 TVM-30SL-HC~VM03	783 x 556 x 1394
 TVM-36SL-HC~VM03	915 x 534 x 1397
 TVM-48-HC~VM01	1198 x 757 x 1996
 TVM-48SL-HC~VM01	1197 x 641 x 2000
 TVM-48SL-48-HC~VM01	1190 x 533 x 1217
 TVM-48SL-54-HC~VM01	1197 x 550 x 1368












Model	Dimensions W x D x H
 TAC-14GS-HC-LD	769 x 816 x 1432
 TOAM-30-HC~TSL01	762 x 743 x 2048
 TOAM-30GS-HC~TSL01	762 x 743 x 2048
 TOAM-36-HC~TSL01	915 x 757 x 1994
 TOAM-36GS-HC~TSL01	915 x 757 x 1994
 TOAM-48-HC~TSL01	1219 x 757 x 1994
 TOAM-48GS-HC~TSL01	1219 x 757 x 1994
 TOAM-60-HC~TSL01	1524 x 757 x 1994
 TOAM-60GS-HC~TSL01	1524 x 757 x 1994
 TOAM-72-HC~TSL01	1829 x 757 x 1994
 TOAM-72GS-HC~TSL01	1829 x 757 x 1994












Model	Dimensions W x D x H
 T-11G-HC~TSL01	487 x 541 x 1786

# International Specifications











Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 CVM-11-HC~EGC01	1/5	n/a	2.5	n/a
 CVM-13-HC~EGC01	1/5	n/a	2.5	n/a
 CVM-20-HC~EGC01	1/4	n/a	2.5	n/a
 CVM-24-HC~EGC01	1/4	n/a	3.4	n/a
 CVM-27-HC~EGC01	1/4	n/a	3.5	n/a
 GDM-06-34-HC~TSL01	1/10	n/a	1.6	n/a
 GDM-06-34-HC~TSL01 <sub>EXTTOP</sub>	1/10	n/a	1.6	n/a
 GDM-07-HC~FGD01	1/6	1/6	1.9	1.1
 GDM-08-HC~TSL01	1/5	n/a	1.8	n/a
 GDM-09-SQ-HC-LD	1/6	n/a	1.9	n/a
 GDM-10-HC~TSL01	1/5	n/a	1.8	n/a

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 GDM-10PT-HC~TSL01	1/5	n/a	2.0	n/a
 GDM-10SSL-HC~TSL01	1/5	n/a	1.8	n/a
 GDM-10-58-HC~TSL01	1/5	n/a	1.8	n/a
 GDM-12-HC~TSL01	1/5	n/a	1.8	n/a
 GDM-14RF-HC-LD	1/5	n/a	2.0	n/a
 GDM-15-RTO-HC-LD	1/6	1/6	2	n/a
 GDM-23-HC~TSL01	1/3	1/3	5.4	2.4
 GDM-26-HC~TSL01	1/3	n/a	5.4	n/a
 GDM-33-HC-LD	1/2	1/2	3.9	4.6
 GDM-33CPT-54-HC-LD	1/5	n/a	2.0	n/a
 GDM-33SSL-56-HC-LD	1/5	n/a	2.0	n/a

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 GDM-35-HC~TSL01	½	½	3.9	4.6
 GDM-35SL-RF-HC-LD	⅓	n/a	2	n/a
 GDM-41-HC-LD	½	n/a	3.9	n/a
 GDM-41C-48-HC-LD	⅓	n/a	2	n/a
 GDM-41CPT-48-HC-LD	⅓	n/a	2.0	n/a
 GDM-41SL-HC-LD	½	n/a	10.8	n/a
 GDM-41SL-48-HC-LD	⅓	n/a	2.0	n/a
 GDM-41SL-54-HC-LD	⅓	n/a	2.0	n/a
 GDM-41SL-60-HC-LD	⅓	n/a	2.0	n/a
 GDM-43-HC~TSL01	½	n/a	3.9	n/a
 GDM-47-HC-LD	½	n/a	5.8	n/a

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 GDM-49-HC~TSL01	½	n/a	5.8	n/a
 GDM-69-HC-LD	½	n/a	7.3	n/a
 GDM-72-HC~TSL01	¾	n/a	8	n/a
 TVM-30SL-HC~VM03	⅓	n/a	2	n/a
 TVM-30SL-HC~VM03	⅓	n/a	2	n/a
 TVM-36SL-HC~VM01	⅓	n/a	2	n/a
 TVM-48-HC~VM01	½	n/a	10.5	n/a
 TVM-48SL-HC~VM01	½	1/2	10.8	4.9
 TVM-48SL-48-HC~VM01	⅓	n/a	2.0	n/a
 TVM-48SL-54-HC~VM01	⅓	n/a	2	n/a
 TAC-14GS-HC-LD	¾	n/a	11.2	n/a

# International Specifications

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 TOAM-30-HC~TSL01	¾	n/a	9.5	n/a
 TOAM-30GS-HC~TSL01	¾	n/a	9.5	n/a
 TOAM-36-HC~TSL01	1	n/a	12.5	n/a
 TOAM-36GS-HC~TSL01	1	n/a	12.5	n/a
 TOAM-48-HC~TSL01	¾	n/a	7.6	n/a
 TOAM-48GS-HC~TSL01	¾	n/a	7.6	n/a
 TOAM-60-HC~TSL01	¾	n/a	7.4	n/a
 TOAM-60GS-HC~TSL01	¾	n/a	7.4	n/a
 TOAM-72-HC~TSL01	¾	n/a	14.9	n/a
 TOAM-72GS-HC~TSL01	¾	n/a	14.9	n/a

Model	H.P.		AMPS	
	U.S.	INTL	U.S.	INTL
 T-11G-HC~TSL01	1/10	n/a	1.6	n/a



True Stripe signs are standard on all GDM models.



Plain white, plain black, and stainless steel signs are available upon request on most models.



Alternative signs are shipped from the factory and are available at no charge if indicated at the time the order is placed. If a sign is ordered after the unit leaves the factory, an upcharge will apply.



Custom signs and graphics are available. Please contact the factory for details and pricing.



True stripe graphic available for all models



Upcharges may apply.  
Availability of models may vary.

# Graphic Signs

		Item# S-BCBV / S-SCBV		
		Item# S-BCJ / S-SCJ		
		Item# S-BCW / S-SCW		
		Item# S-BED / S-SED		
		Item# S-BSD / S-SSD		
		Item# S-BCB / S-SCB		
		Item# S-BW / S-SW		
		Item# S-BCM / S-SCM		
		Item# S-BMD / S-SMD		

Item# S-BSS / S-SSS



Item# S-BI / S-SI

Item# S-BDF / S-SDF



Item# S-BNC / S-SNC

Item# S-BS / S-SS



SPARKLING ICE

Item# S-TSI-11

Item# S-BFS / S-SFS



WINE

Item# S-TW-16

Item# S-BD / S-SD



DESSERTS BRONZE

Item# S-TD-15

Item# S-BFRF / S-SFRF



FLOWERS

Item# S-TF-16

Item# S-BNC / S-SNC



TRUE STRIPE

Item# S-TS-02

Item# S-BFZF / S-SFZF

Item# S-BIC / S-SIC

# Exterior Finishes



Black



White



Stainless Steel

**Powder Coating** Contact factory for additional available RAL colors.

Matte White	9001	1013	1001	7035	7001	7023	7024	8001	8007	3011	9016
6018	6013	6010	6001	1028	2009	3020	5024	5010	5009	Gloss Black	Ultra Matte Black

## One Swing Door

CVM-11-HC~EGC01  
CVM-13-HC~EGC01  
CVM-20-HC~EGC01  
CVM-24-HC~EGC01  
CVM-27-HC~EGC01  
GDM-06-34-HC~TSL01  
GDM-06-34-HC~TSL01-EXTTOP  
GDM-07-HC~FGD01  
GDM-08-HC~TSL01  
GDM-10-HC~TSL01  
GDM-10PT-HC~TSL01  
GDM-10SSL-HC~TSL01  
GDM-10-58-HC~TSL01  
GDM-12-HC~TSL01  
GDM-15-RTO-HC-LD  
GDM-23-HC~TSL01  
GDM-26-HC~TSL01  
T-11G-HC~TSL01

## Two Swing Doors

GDM-10PT-HC~TSL01 (1fr/1bk)  
GDM-14RF-HC-LD

GDM-35-HC~TSL01  
GDM-35SL-RF-HC-LD  
GDM-43-HC~TSL01  
GDM-49-HC~TSL01  
TVM-30-HC~VM03  
TVM-30SL-HC-VM03  
TVM-36SL-HC~VM03  
TVM-48-HC~VM01  
TVM-48SL-HC~VM01  
TVM-48SL-48-HC~VM01  
TVM-48SL-54-HC~VM01

## Three Swing Doors

GDM-72-HC~TSL01

## Two Slide Doors

GDM-09-SQ-HC-LD  
GDM-33-HC-LD  
GDM-33C-60-HC-LD  
GDM-33SSL-56-HC-LD  
GDM-41-HC-LD  
GDM-41SL-HC-LD  
GDM-41C-48-HC-LD  
GDM-41SL-48-HC-LD

GDM-41SL-54-HC-LD  
GDM-41SL-60-HC-LD  
GDM-47-HC-LD

## Three Slide Doors

GDM-69-HC-LD

## Four Slide Doors (2 front, 2 back)


GDM-33CPT-54-HC-LD  
GDM-41CPT-48-HC-LD

## Air Curtain Merchandisers (no doors)

TAC-14GS-HC-LD  
TOAM-30-HC  
TOAM-30GS-HC  
TOAM-36-HC-TSL01  
TOAM-36GS-HC-TSL01  
TOAM-48-HC  
TOAM-48GS-HC  
TOAM-60-HC  
TOAM-60GS-HC  
TOAM-72-HC  
TOAM-72GS-HC

# CVM<sup>®</sup>

CONTEMPORARY VISUAL MERCHANDISERS

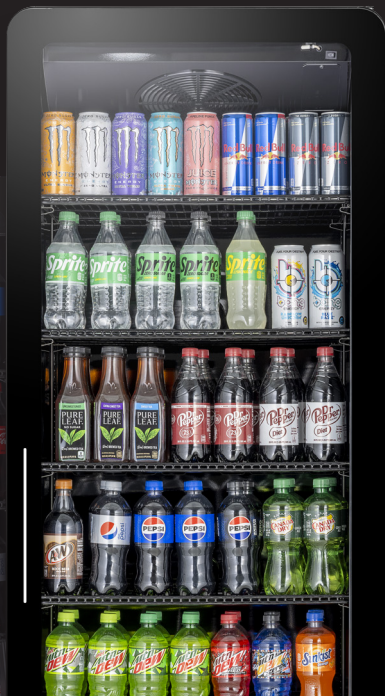

# CVM-11-HC~EGC01

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	24 <sup>7</sup> / <sub>8</sub> x 22 <sup>7</sup> / <sub>8</sub> x 53 <sup>5</sup> / <sub>8</sub> inches 630 x 581 x 1360 mm
Shelf Size (WxD)	20 <sup>7</sup> / <sub>16</sub> x 17 <sup>1</sup> / <sub>2</sub> inches 520 x 445 mm
Capacity (20 oz.)	Standard Shelving: 4 Flat Shelves - 189 <i>TrueFlex</i> . (4) - 165
Trailer Loads	40' Container - 48, 53' Trailer Load - 63
Crated Weight (Lbs.)	210
Horsepower	1/5
Amps	2.5
Daily Kwh Usage	1.7
<sup>†</sup> Depth does not include 1" (26 mm) for rear bumper	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	24 <sup>7</sup> / <sub>8</sub> x 22 <sup>7</sup> / <sub>8</sub> x 63 <sup>3</sup> / <sub>4</sub> inches 630 x 581 x 1617 mm
Shelf Size (WxD)	20 <sup>7</sup> / <sub>16</sub> x 17 <sup>1</sup> / <sub>2</sub> inches 520 x 445 mm
Capacity (20 oz.)	Standard Shelving: 5 Flat Shelves - 231 <i>Trueflex</i> . (5) - 201
Trailer Loads	40' Container - 48, 53' Trailer Load - 63
Crated Weight (Lbs.)	235
Horsepower	1/5
Amps	2.5
Daily Kwh Usage	1.9
<sup>†</sup> Depth does not include 1" (26mm) for rear bumper.	



# CVM-20-HC~EGC01

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	27 x 24½ x 78½ inches 686 x 623 x 1994 mm
Shelf Size (WxD)	22 <sup>15</sup> / <sub>32</sub> x 18¼ inches 571 x 464 mm
Capacity (20 oz.)	Standard Shelving: 6 Flat Shelves - 280 <i>Trueflex</i> ® (6) - 250
Trailer Loads	40' Container - 48, 53' Trailer Load - 66
Crated Weight (Lbs.)	320
Horsepower	1/4
Amps	3.4
Daily Kwh Usage	TBD
†Depth does not include 5/8" (16 mm) for rear mechanical components.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	27 x 29½ x 78½ inches 686 x 750 x 1994 mm
Shelf Size (WxD)	22½ x 23¼ inches 571 x 591 mm
Capacity (20 oz.)	Standard Shelving: 6 Flat Shelves - 360 <i>Trueflex</i> . (6) - 328
Trailer Loads	40' Container - 39, 53' Trailer Load - 51
Crated Weight (Lbs.)	330
Horsepower	1/4
Amps	3.4
Daily Kwh Usage	TBD
†Depth does not include 5/8" (16 mm) for rear mechanical components.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	30 x 29½ x 78½ inches 762 x 747 x 1993 mm
Shelf Size (WxD)	25 <sup>11</sup> / <sub>16</sub> x 23¼ inches 652 x 641 mm
Capacity (20 oz.)	Standard Shelving: 6 Flat Shelves - 414 <i>Trueflex</i> ® (6) - 368
Trailer Loads	40' Container - 28, 53' Trailer Load - 38
Crated Weight (Lbs.)	340
Horsepower	1/4
Amps	3.4
Daily Kwh Usage	2.3
†Depth does not include 5/8" (16 mm) for rear mechanical components.	





# GDM<sup>®</sup>

GLASS DOOR MERCHANDISERS



 natural refrigerant  
**True**

# GDM-06-34-HC~TSL01

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	20½ x 26¾ x 33½ inches 519 x 670 x 850 mm
Shelf Size (WxD)	17⅞ x 17½ inches 435 x 445 mm
Capacity (20 oz.)	Standard Shelving: 3 Flat Shelves - 96
Trailer Loads	40' Container - 78, 53' Trailer Load - 136
Crated Weight (Lbs.)	175
Horsepower	1/10
Amps	1.6
Daily Kwh Usage	0.86
<sup>†</sup> Depth does not include 1⅝" (42 mm) for swing door handle. <sup>†</sup> Depth does not include ¼" (6 mm) for system mechanical components.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	20 <sup>3</sup> / <sub>8</sub> x 26 <sup>3</sup> / <sub>8</sub> x 34 inches 518 x 670 x 863 mm
Shelf Size (WxD)	17 <sup>1</sup> / <sub>8</sub> x 17 <sup>1</sup> / <sub>2</sub> inches 435 x 445 mm
Capacity (20 oz.)	Standard Shelving: 3 Flat Shelves - 94
Trailer Loads	40' Container - 78, 53' Trailer Load - 136
Crated Weight (Lbs.)	175
Horsepower	1/10
Amps	1.6
Daily Kwh Usage	0.86
<sup>†</sup> Depth does not include 1 <sup>5</sup> / <sub>8</sub> " (42 mm) for swing door handle. <sup>†</sup> Depth does not include 1/4" (6 mm) for system mechanical components.	



# GDM-07-HC~TSL01

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	24 <sup>1</sup> / <sub>8</sub> x 24 <sup>5</sup> / <sub>8</sub> x 39 <sup>7</sup> / <sub>8</sub> inches 613 x 626 x 1013 mm
Shelf Size (WxD)	2 Top = 19 <sup>3</sup> / <sub>4</sub> x 18 inches 1 Bottom = 19 <sup>3</sup> / <sub>4</sub> x 16 <sup>1</sup> / <sub>2</sub> inches 2 Top = 502 x 458 mm 1 Bottom = 502 x 420 mm
Capacity (20 oz.)	Standard Shelving: 2 <sup>1</sup> / <sub>2</sub> Flat Shelves - 100
Trailer Loads	40' Container - 84, 53' Trailer Load - 120
Crated Weight (Lbs.)	180
Horsepower	1/6
Amps	1.9
Daily Kwh Usage	1.04
†Depth does not include 1 <sup>5</sup> / <sub>8</sub> " (42 mm) for swing door handle. †Depth does not include 1/2" (13 mm) for system mechanical components.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	23½ x 23 x 48 inches 594 x 583 x 1219 mm
Shelf Size (WxD)	19⅛ x 17½ inches 486 x 445 mm
Capacity (20 oz.)	Standard Shelving: 3 Flat Shelves - 108 <i>Trueflex</i> - 90
Trailer Loads	40' Container - 51, 53' Trailer Load - 66
Crated Weight (Lbs.)	180
Horsepower	1/5
Amps	1.8
Daily Kwh Usage	1.05
<sup>†</sup> Depth does not include 1⅝" (42 mm) for swing door handle. <sup>†</sup> Depth does not include 1" (26 mm) for rear bumper.	



# GDM-09-SQ-HC-LD

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	36 x 22 <sup>3</sup> / <sub>8</sub> x 39 <sup>3</sup> / <sub>4</sub> inches 914 x 567 x 1008 mm
Shelf Size (WxD)	2 Top = 31 <sup>3</sup> / <sub>4</sub> x 15 1 Bottom = 31 <sup>3</sup> / <sub>4</sub> x 8 <sup>1</sup> / <sub>2</sub> inches 2 Top = 807 x 381 1 Bottom = 807 x 210 mm
Capacity (20 oz.)	Standard Shelving: 3 Flat Shelves - 130
Trailer Loads	40' Container - 66, 53' Trailer Load - 120
Crated Weight (Lbs.)	230
Horsepower	1/6
Amps	1.9
Daily Kwh Usage	1.43
†Depth does not include 7/8" (21 mm) for door handles.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	24 <sup>7</sup> / <sub>8</sub> x 22 <sup>7</sup> / <sub>8</sub> x 53 <sup>3</sup> / <sub>8</sub> inches 632 x 581 x 1356 mm
Shelf Size (WxD)	205 <sup>7</sup> / <sub>8</sub> x 17 <sup>1</sup> / <sub>2</sub> inches 524 x 445 mm
Capacity (20 oz.)	Standard Shelving: 3 Shelves - 168 <i>Trueflex</i> ® (3) - 144
Trailer Loads	40' Container - 48, 53' Trailer Load - 63
Crated Weight (Lbs.)	200
Horsepower	1/5
Amps	1.8
Daily Kwh Usage	1.18
<sup>†</sup> Depth does not include 1 <sup>5</sup> / <sub>8</sub> " (42 mm) for door handle. <sup>†</sup> Depth does not include 5/8" (16 mm) for rear mechanical components.	



# GDM-10PT-HC~TSL01

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	24 <sup>7</sup> / <sub>8</sub> x 25 <sup>1</sup> / <sub>2</sub> x 53 <sup>3</sup> / <sub>8</sub> inches 630 x 648 x 1356 mm
Shelf Size (WxD)	20 <sup>5</sup> / <sub>8</sub> x 17 <sup>1</sup> / <sub>2</sub> inches 524 x 445 mm
Capacity (20 oz.)	Standard Shelving: 3 Flat Shelves - 126 <i>TrueFlex</i> ™ -108
Trailer Loads	40' Container - 45, 53' Trailer Load - 60
Crated Weight (Lbs.)	225
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	1.87
<sup>†</sup> Depth does not include 1 <sup>3</sup> / <sub>8</sub> " (42 mm) each side for door handles.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	24 <sup>7</sup> / <sub>8</sub> x 18 x 53 <sup>1</sup> / <sub>2</sub> inches 632 x 458 x 1359 mm
Shelf Size (WxD)	20 <sup>5</sup> / <sub>8</sub> x 12 inches 524 x 318 mm
Capacity (20 oz.)	Standard Shelving: 3 White Wire -112
Trailer Loads	40' Container - 57, 53' Trailer Load - 75
Crated Weight (Lbs.)	180
Horsepower	1/5
Amps	1.8
Daily Kwh Usage	1.41
<sup>†</sup> Depth does not include 1 <sup>5</sup> / <sub>8</sub> " (42 mm) for door handle. <sup>†</sup> Depth does not include <sup>5</sup> / <sub>8</sub> " (16 mm) for rear mechanical components.	



# GDM-10-58-HC~TSL01

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	24 <sup>7</sup> / <sub>8</sub> x 22 <sup>7</sup> / <sub>8</sub> x 58 inches 630 x 581 x 1472 mm
Shelf Size (WxD)	20 <sup>5</sup> / <sub>8</sub> x 17 <sup>1</sup> / <sub>2</sub> inches 524 x 445 mm
Capacity (20 oz.)	Shelving Options: 4 Flat Shelves - 168 <i>Trueflex</i> . (4) - 144
Trailer Loads	40' Container - 48, 53' Trailer Load - 63
Crated Weight (Lbs.)	210
Horsepower	1/5
Amps	1.8
Daily Kwh Usage	1.38
<sup>†</sup> Depth does not include 1 <sup>3</sup> / <sub>8</sub> " (35 mm) for door handle. <sup>‡</sup> Depth does not include <sup>3</sup> / <sub>8</sub> " (16 mm) for rear mechanical components.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH <sup>*</sup> )	19¼ x 21¾ x 70¾ inches 487 x 541 x 1786 mm
Shelf Size (WxD)	14¾ x 15½ inches 375 x 394 mm
Shelf Type	Standard Shelving: 3 Wire Shelves - 125
Trailer Loads	40' Container - 51, 53' Trailer Load - 66
Crated Weight (Lbs.)	210
Horsepower	1/10
Amps	1.6
Daily Kwh Usage	1.1
<sup>†</sup> Depth does not include 1½" (42 mm) for door handle. <sup>‡</sup> Depth does not include 1" (26 mm) for rear bumper. <sup>*</sup> Height does not include ½" (13 mm) for castors.	



# GDM-12-HC~TSL01

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	24 <sup>7</sup> / <sub>8</sub> x 22 <sup>7</sup> / <sub>8</sub> x 62 <sup>3</sup> / <sub>8</sub> inches 632 x 581 x 1585 mm
Shelf Size (WxD)	20 <sup>5</sup> / <sub>8</sub> x 17 <sup>1</sup> / <sub>2</sub> inches 524 x 445 mm
Capacity (20 oz.)	Shelving Options: 4 Flat Shelves - 210 <i>Trueflex</i> . (4) - 144
Trailer Loads	40' Container - 48, 53' Trailer Load - 63
Crated Weight (Lbs.)	200
Horsepower	1/5
Amps	1.8
Daily Kwh Usage	1.28
<sup>†</sup> Depth does not include 1 <sup>5</sup> / <sub>8</sub> " (42 mm) for door handle. <sup>†</sup> Depth does not include 5/8" (16 mm) for rear mechanical components.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH <sup>*</sup> )	30 <sup>3</sup> / <sub>8</sub> x 29 <sup>1</sup> / <sub>4</sub> x 58 inches 772 x 743 x 1474 mm
Shelf Size (WxD)	25 <sup>3</sup> / <sub>4</sub> x 20 <sup>1</sup> / <sub>2</sub> inches 655 x 521 mm
Capacity (20 oz.)	Standard Shelving: <i>Trueflex</i> (4) - 196 Shelving Options: 4 Flat Shelves - 224
Trailer Loads	40' Container - 26, 53' Trailer Load - 54
Crated Weight (Lbs.)	280
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	1.18
<sup>†</sup> Depth does not include 2" (51 mm) for door handles. <sup>*</sup> Height does not include 5/8" (16 mm) for appliance rollers.	



# GDM-15-RTO-HC-LD

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	24 <sup>7</sup> / <sub>8</sub> x 24 <sup>5</sup> / <sub>8</sub> x 75 inches 632 x 626 x 1905 mm
Shelf Size (WxD)	20 <sup>5</sup> / <sub>8</sub> x 17 <sup>1</sup> / <sub>2</sub> inches 524 x 445 mm
Capacity (20 oz.)	Standard Shelving: 5 Flat Shelves - 210 <i>Trueflex</i> . (5) - 180
Trailer Loads	40' Container - 39, 53' Trailer Load - 54
Crated Weight (Lbs.)	250
Horsepower	1/6
Amps	2
Daily Kwh Usage	1.78
<sup>†</sup> Depth does not include 1 <sup>1</sup> / <sub>2</sub> " (39 mm) for door handle.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	27 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub> inches 686 x 759 x 1998 mm
Shelf Size (WxD)	22 <sup>5</sup> / <sub>8</sub> x 23 <sup>1</sup> / <sub>4</sub> inches 575 x 591 mm
Capacity (20 oz.)	Shelving Options: 5 Flat Shelves - 320 <i>Trueflex.</i> (5) - 280
Trailer Loads	40' Container - 39, 53' Trailer Load - 51
Crated Weight (Lbs.)	305
Horsepower	1/3
Amps	5.4
Daily Kwh Usage	1.95
<sup>†</sup> Depth does not include 1 <sup>5</sup> / <sub>8</sub> " (42 mm) for door handle.	



# GDM-26-HC~TSL01

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	30 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub> inches 762 x 759 x 1998 mm
Shelf Size (WxD)	25 <sup>3</sup> / <sub>4</sub> x 23 <sup>1</sup> / <sub>4</sub> inches 655 x 591 mm
Capacity (20 oz.)	Standard Shelving: 5 Flat Shelves - 360 <i>Trueflex</i> ® (5) - 320
Trailer Loads	40' Container - 26, 53' Trailer Load - 51
Crated Weight (Lbs.)	320
Horsepower	1/3
Amps	5.4
Daily Kwh Usage	1.92
<sup>†</sup> Depth does not include 1 <sup>5</sup> / <sub>8</sub> " (42 mm) for door handle.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	39½ x 24⅞ x 59¾ inches 1004 x 753 x 1998 mm
Shelf Size (WxD)	17⅞ x 34⅜ inches 439 x 537 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (3) - 198 Shelving Options: 3 Flat Shelves - 198 <i>truetrac</i> (4) - 264
Trailer Loads	40' Container- 33 units, 53' Container- 43 units
Crated Weight (Lbs.)	390
Horsepower	1/5
Amps	2.1
Daily Kwh Usage	1.95
<sup>†</sup> Depth does not include ⅞" (23 mm) each side for door handles.	



# GDM-33CPT-54-HC-LD

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	39½ x 24⅞ x 54⅞ inches 1004 x 613 x 1375 mm
Shelf Size (WxD)	34¾ x 17⅞ inches 874 x 455 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (3) - 198 Shelving Options: 3 Flat Shelves - 198
Trailer Loads	40' Container - 34, 53' Trailer Load - 44
Crated Weight (Lbs.)	360
Horsepower	⅓
Amps	2.0
Daily Kwh Usage	2.03
†Depth does not include ⅞" (23 mm) each side for door handles.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	39½ x 29 <sup>5</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub> inches 1004 x 753 x 1998 mm
Shelf Size (WxD)	17¼ x 21 <sup>1</sup> / <sub>8</sub> inches 439 x 537 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 420 <i>TrueFlex</i> (10) - 350
Trailer Loads	40' Container - 28, 53' Trailer Load - 38
Crated Weight (Lbs.)	360
Horsepower	½
Amps	3.9
Daily Kwh Usage	3.69
<sup>†</sup> Depth does not include ¾" (10 mm) for slide door handles.	



# GDM-33SSL-56-HC-LD

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	36 x 18 x 56 inches 915 x 458 x 1423 mm
Shelf Size (WxD)	31¾ x 11¾ inches 807 x 299 mm
Capacity (20 oz.)	Standard Shelving: 4 Flat Shelves - 176
Trailer Loads	40' Container - 46, 53' Trailer Load - 62
Crated Weight (Lbs.)	240
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	1.74
<sup>†</sup> Depth does not include 7/8" (23 mm) for door handles.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	39½ x 297/8 x 785/8 inches 1004 x 759 x 1998 mm
Shelf Size (WxD)	17¼ x 211/8 inches 439 x 537 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 420 <i>Trueflex</i> (10) - 350
Trailer Loads	40' Container - 26, 53' Trailer Load - 34
Crated Weight (Lbs.)	375
Horsepower	½
Amps	3.9
Daily Kwh Usage	3.3
†Depth does not include 1½" (42 mm) for door handles.	



# GDM-35SL-RF-HC-LD

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>+</sup> xH)	39 $\frac{3}{4}$ x 24 $\frac{1}{4}$ x 58 $\frac{5}{8}$ inches 1010 x 616 x 1477 mm
Shelf Size (WxD)	35 $\frac{1}{4}$ x 15 $\frac{1}{4}$ inches 896 x 388 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (4) - 220 Shelving Options: 4 Flat Shelves - 240
Trailer Loads	40' Container - 34, 53' Trailer Load - 44
Crated Weight (Lbs.)	275
Horsepower	1/5
Amps	2
Daily Kwh Usage	1.72



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	47 <sup>1</sup> / <sub>8</sub> x 29 <sup>5</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub> inches 1197 x 753 x 1998 mm
Shelf Size (WxD)	20 <sup>7</sup> / <sub>8</sub> x 20 <sup>5</sup> / <sub>8</sub> inches 531 x 524 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 490 <i>TrueFlex</i> (10) - 420
Trailer Loads	40' Container - 23, 53' Trailer Load - 31
Crated Weight (Lbs.)	415
Horsepower	½
Amps	3.9
Daily Kwh Usage	3.91
†Depth does not include ¾" (10 mm) for door handles.	



# GDM-41C-48-HC-LD

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	48 x 24 <sup>1</sup> / <sub>8</sub> x 48 inches 1220 x 613 x 1220 mm
Shelf Size (WxD)	21 <sup>1</sup> / <sub>2</sub> x 17 <sup>1</sup> / <sub>2</sub> inches 547 x 445 mm
Capacity (20 oz.)	Standard Shelving: <i>Trueflex</i> ® (6) - 216 Shelving Options - (6) Wire Shelves - 252
Trailer Loads	40' Container - 27, 53' Trailer Load - 36
Crated Weight (Lbs.)	325
Horsepower	1/5
Amps	2
Daily Kwh Usage	1.57
<sup>†</sup> Depth does not include 3/8" (23 mm) for door handles.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	48 x 24 <sup>1</sup> / <sub>8</sub> x 48 inches 1220 x 613 x 1220 mm
Shelf Size (WxD)	20 <sup>5</sup> / <sub>8</sub> x 16 <sup>13</sup> / <sub>32</sub> inches 524 x 417 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (6) - 180 Shelving Options: (6) Wire Shelves - 210
Trailer Loads	40' Container - 27, 53' Trailer Load - 36
Crated Weight (Lbs.)	394
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	2.21
<sup>†</sup> Depth does not include 7/8" (23 mm) each side for door handles.	



# GDM-41SL-HC-LD

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	47 <sup>1</sup> / <sub>8</sub> x 24 <sup>1</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub> inches 1197 x 613 x 1998 mm
Shelf Size (WxD)	20 <sup>7</sup> / <sub>8</sub> x 16 <sup>1</sup> / <sub>4</sub> inches 531 x 413 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (10) - 300 Shelving Options: 10 Flat Shelves - 350
Trailer Loads	40' Container - 27, 53' Trailer Load - 37
Crated Weight (Lbs.)	410
Horsepower	½
Amps	10.8
Daily Kwh Usage	3.42
<sup>†</sup> Depth does not include ¾" (23 mm) for door handles.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	46 <sup>7</sup> / <sub>8</sub> x 21 x 47 <sup>3</sup> / <sub>4</sub> inches 1191 x 534 x 1213 mm
Shelf Size (WxD)	21 <sup>1</sup> / <sub>2</sub> x 14 <sup>3</sup> / <sub>4</sub> inches 547 x 375 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (6) - 180 Shelving Options: 6 Flat Shelves - 210
Trailer Loads	40' Container - 28, 53' Trailer Load - 48
Crated Weight (Lbs.)	295
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	1.62
<sup>†</sup> Depth does not include 7/8" (23 mm) for door handles.	



# GDM-41SL-54-HC-LD

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	47 <sup>1</sup> / <sub>8</sub> x 21 x 54 <sup>1</sup> / <sub>8</sub> inches 1197 x 534 x 1375 mm
Shelf Size (WxD)	20 <sup>7</sup> / <sub>8</sub> x 14 <sup>3</sup> / <sub>4</sub> inches 531 x 375 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (6) - 180 Shelving Options: 6 Flat Shelves - 210
Trailer Loads	40' Container - 28, 53' Trailer Load - 49
Crated Weight (Lbs.)	295
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	1.74
<sup>†</sup> Depth does not include 7/8" (23 mm) for door handles.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	47 <sup>1</sup> / <sub>8</sub> x 21 x 59 <sup>7</sup> / <sub>8</sub> inches 1197 x 534 x 1521 mm
Shelf Size (WxD)	20 <sup>7</sup> / <sub>8</sub> x 14 <sup>3</sup> / <sub>4</sub> inches 531 x 375 mm
Capacity (20 oz.)	Standard Shelving: <i>truetrac</i> (6) - 180 Shelving Options: 6 Flat Shelves - 210
Trailer Loads	40' Container - 28, 53' Trailer Load - 49
Crated Weight (Lbs.)	345
Horsepower	1 <sup>1</sup> / <sub>5</sub>
Amps	2
Daily Kwh Usage	1.85
†Depth does not include 7/8" (23 mm) for door handles.	



# GDM-43-HC~TSL01

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	47 <sup>1</sup> / <sub>8</sub> x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub> inches 1197 x 759 x 1998 mm
Shelf Size (WxD)	20 <sup>7</sup> / <sub>8</sub> x 22 <sup>1</sup> / <sub>8</sub> inches 531 x 562 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 490 <i>Trueflex</i> (10) - 420
Trailer Loads	40' Container - 22, 53' Trailer Load - 29
Crated Weight (Lbs.)	420
Horsepower	½
Amps	3.9
Daily Kwh Usage	3.69
<sup>†</sup> Depth does not include 1½" (42 mm) for door handles.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	54 <sup>1</sup> / <sub>8</sub> x 29 <sup>5</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub> inches 1375 x 753 x 1998 mm
Shelf Size (WxD)	24 <sup>1</sup> / <sub>2</sub> x 20 <sup>5</sup> / <sub>8</sub> inches 623 x 524 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 560 <i>Trueflex</i> . (10) - 490
Trailer Loads	40' Container - 22, 53' Trailer Load - 30
Crated Weight (Lbs.)	445
Horsepower	1/2
Amps	5.8
Daily Kwh Usage	4.44
<sup>†</sup> Depth does not include 3/8" (10 mm) for door handles.	



# GDM-49-HC~TSL01

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	54 <sup>1</sup> / <sub>8</sub> x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub> inches 1375 x 759 x 1998 mm
Shelf Size (WxD)	24 <sup>5</sup> / <sub>8</sub> x 22 <sup>1</sup> / <sub>2</sub> inches 626 x 572 mm
Capacity (20 oz.)	Standard Shelving: 10 Flat Shelves - 560 <i>Trueflex</i> . (10) - 490
Trailer Loads	40' Container - 16, 53' Trailer Load - 28
Crated Weight (Lbs.)	455
Horsepower	½
Amps	5.8
Daily Kwh Usage	3.6
†Depth does not include 1½" (42 mm) for door handles.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	78 <sup>1</sup> / <sub>8</sub> x 29 <sup>5</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub> inches 1985 x 753 x 1998 mm
Shelf Size (WxD)	23 <sup>7</sup> / <sub>8</sub> x 20 <sup>5</sup> / <sub>8</sub> inches 607 x 524 mm
Capacity (20 oz.)	Standard Shelving: 15 Flat Shelves - 840 <i>Trueflex</i> . (15) - 735
Trailer Loads	40' Container - 14, 53' Trailer Load - 19
Crated Weight (Lbs.)	625
Horsepower	½
Amps	7.3
Daily Kwh Usage	6.27
†Depth does not include ¾" (10 mm) for door handles.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	78 <sup>1</sup> / <sub>8</sub> x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub> inches 1985 x 759 x 1998 mm
Shelf Size (WxD)	24 <sup>1</sup> / <sub>4</sub> x 22 <sup>1</sup> / <sub>8</sub> inches 616 x 562 mm
Capacity (20 oz.)	Standard Shelving: 15 Flat Shelves - 840 <i>Trueflex</i> . (15) - 735
Trailer Loads	40' Container - 13, 53' Trailer Load - 17
Crated Weight (Lbs.)	620
Horsepower	¾
Amps	8
Daily Kwh Usage	4.9
<sup>†</sup> Depth does not include 1 <sup>5</sup> / <sub>8</sub> " (42 mm) for door handles.	



The logo for Truwe Refrigeration features the word "truwe" in a stylized, italicized, lowercase font with a registered trademark symbol (®) to its right. Below this, the word "REFRIGERATION" is written in a clean, uppercase, sans-serif font. The background of the slide is a gradient of blue and teal with abstract, layered geometric shapes.

# TVMM<sup>®</sup>

VISUAL MERCHANDISERS



# TVM-30-HC~VM03

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	30 <sup>7</sup> / <sub>8</sub> x 23 <sup>7</sup> / <sub>8</sub> x 54 <sup>7</sup> / <sub>8</sub> inches 783 x 606 x 1394 mm
Shelf Size (WxD)	26 <sup>9</sup> / <sub>16</sub> x 17 <sup>1</sup> / <sub>2</sub> inches 675 x 445 mm
Capacity (20 oz.)	Standard Shelving: 4 TrueFlex Pac - 216
Trailer Loads	40' Container - 39, 53' Trailer Load - 51
Crated Weight (Lbs.)	250
Horsepower	1/5
Amps	2
Daily Kwh Usage	1.64
<sup>†</sup> Depth does not include 1 1/2" (38 mm) for door handles. <sup>‡</sup> Depth does not include 1" (26 mm) for rear bumpers.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	30 <sup>7</sup> / <sub>8</sub> x 21 <sup>7</sup> / <sub>8</sub> x 54 <sup>7</sup> / <sub>8</sub> inches 783 x 556 x 1394 mm
Shelf Size (WxD)	26 <sup>5</sup> / <sub>16</sub> x 14 <sup>3</sup> / <sub>4</sub> inches 675 x 445 mm
Capacity (20 oz.)	Standard Shelving: 4 TrueFlex Pac - 180
Trailer Loads	40' Container - 39, 53' Trailer Load - 51
Crated Weight (Lbs.)	240
Horsepower	1/5
Amps	2
Daily Kwh Usage	1.64
<sup>†</sup> Depth does not include 1 1/2" (38 mm) for door handles. <sup>†</sup> Depth does not include 1" (26 mm) for rear bumpers.	



# TVM-36SL-HC~VM03

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD†xH)	36 x 21 ¼ x 55 inches 915 x 537 x 1397 mm
Shelf Size (WxD)	31 ¾ x 14 ¾ inches 807 x 375 mm
Capacity (20 oz.)	Standard Shelving: 4 TrueFlex Pac - 200
Trailer Loads	40' Container - 33, 53' Trailer Load - 44
Crated Weight (Lbs.)	270
Horsepower	1/5
Amps	2
Daily Kwh Usage	1.76
†Depth does not include 1½" (38 mm) for door handles. †Depth does not include 1" (26 mm) for rear bumpers.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	47 <sup>1</sup> / <sub>8</sub> x 25 <sup>1</sup> / <sub>4</sub> x 78 <sup>3</sup> / <sub>4</sub> inches 1197 x 641 x 2000 mm
Shelf Size (WxD)	21 <sup>7</sup> / <sub>32</sub> x 14 inches 539 x 356 mm
Shelf Type	Standard Shelving: 8 Cantilever Shelves - 280
Trailer Loads	40' Container - 22, 53' Trailer Load - 29
Crated Weight (Lbs.)	610
Horsepower	½
Amps	10.8
Daily Kwh Usage	3.76
<sup>†</sup> Depth does not include 1½" (38 mm) for door handles. <sup>†</sup> Depth does not include 1" (26 mm) for rear bumpers.	



# TVM-48-HC~VM01

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	47 <sup>1</sup> / <sub>4</sub> x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>5</sup> / <sub>8</sub> inches 1198 x 757 x 1996 mm
Shelf Size (WxD)	21 <sup>7</sup> / <sub>32</sub> x 19 <sup>1</sup> / <sub>2</sub> inches 539 x 496 mm
Shelf Type	Standard Shelving: 8 Cantilever Shelves - 375
Trailer Loads	40' Container - 16, 53' Trailer Load - 28
Crated Weight (Lbs.)	520
Horsepower	½
Amps	10.5
Daily Kwh Usage	3.77
<sup>†</sup> Depth does not include 1 <sup>3</sup> / <sub>4</sub> " (45 mm) for door handles. <sup>‡</sup> Depth does not include 5/8" (14 mm) for rear mechanical components.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	46 <sup>7</sup> / <sub>8</sub> x 21 x 48 inches 1190 x 533 x 1217 mm
Shelf Size (WxD)	21 <sup>5</sup> / <sub>16</sub> x 12 <sup>1</sup> / <sub>8</sub> inches 542 x 308 mm
Shelf Type	Standard Shelving: 6 Wire Shelves - 210
Trailer Loads	40' Container - 24, 53' Trailer Load - 33
Crated Weight (Lbs.)	315
Horsepower	1/5
Amps	2.0
Daily Kwh Usage	1.38
<sup>†</sup> Depth does not include 2" (51 mm) for door handles. <sup>†</sup> Depth does not include 5/8" (14 mm) for rear mechanical components.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxD <sup>†</sup> xH)	47 <sup>1</sup> / <sub>8</sub> x 21 <sup>3</sup> / <sub>4</sub> x 53 <sup>7</sup> / <sub>8</sub> inches 1197 x 550 x 1368 mm
Shelf Size (WxD)	21 <sup>5</sup> / <sub>16</sub> x 12 <sup>1</sup> / <sub>8</sub> inches 542 x 308 mm
Shelf Type	Standard Shelving: 6 Cantilever Shelves - 168
Trailer Loads	40' Container - 24, 53' Trailer Load - 33
Crated Weight (Lbs.)	380
Horsepower	1/5
Amps	2
Daily Kwh Usage	2.04
<sup>†</sup> Depth does not include 2" (51 mm) for door handles. <sup>†</sup> Depth does not include 1/8" (4 mm) for rear mechanical components.	





*truwe*<sup>®</sup>  
REFRIGERATION

# TOAM™

OPEN AIR MERCHANDISERS



**Bing Crisp**  
Made with Apple & Cherry  
120 CALORIES

**Bing Raspberry**  
120 CALORIES

**FRESH THYME**  
FARMERS MARKET  
**COCONUT Water**  
120 CALORIES  
17.5 FL OZ (520mL)

**FRESH THYME**  
FARMERS MARKET  
**POMEGRANATE Water**  
with Pomegranate  
120 CALORIES  
17.5 FL OZ (520mL)

**POM**  
100% POMEGRANATE  
**POMEGRANATE SWEET TEA**  
12 FL OZ (355mL)

**POM**  
100% POMEGRANATE  
**POMEGRANATE-NEY GREEN TEA**  
12 FL OZ (355mL)

**100% POMEGRANATE**  
**100% POMEGRANATE**  
**100% POMEGRANATE**

TURKEY, HAN  
ROASTED  
AMERICAN CHEESE  
SWISS CABBAGE  
TOMATO

# TOAM-30-HC~TSL01\*

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	30 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>1</sup> / <sub>2</sub> inches 762 x 759 x 1994 mm
Shelf Size (WxD)	25 <sup>13</sup> / <sub>16</sub> x 15 <sup>15</sup> / <sub>32</sub> inches 656 x 393 mm
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 234
Trailer Loads	40' Container - 26, 53' Trailer Load - 31
Crated Weight (Lbs.)	365
Horsepower	$\frac{3}{4}$
Amps	9.5
Daily Kwh Usage	13.86
*No sign version available.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	30 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>1</sup> / <sub>2</sub> inches 762 x 759 x 1994 mm
Shelf Size (WxD)	25 <sup>13</sup> / <sub>16</sub> x 15 <sup>15</sup> / <sub>32</sub> inches 656 x 393 mm
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 234
Trailer Loads	40' Container - 26, 53' Trailer Load - 31
Crated Weight (Lbs.)	390
Horsepower	<sup>3</sup> / <sub>4</sub>
Amps	9.5
Daily Kwh Usage	18.33
*No sign version available.	



# TOAM-36-HC-TSL01\*

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	36 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>1</sup> / <sub>2</sub> inches
Shelf Size (WxD)	36 x 15 <sup>17</sup> / <sub>32</sub> inches
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 286
Trailer Loads	40' container - 22 units, 53' container- 30 units
Crated Weight (Lbs.)	400
Horsepower	1
Amps	12.5
Daily Kwh Usage	17.35
*No sign version available.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	36 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>1</sup> / <sub>2</sub> inches
Shelf Size (WxD)	36 x 15 <sup>17</sup> / <sub>32</sub> inches
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 286
Trailer Loads	40' container - 22 units, 53' container- 30 units
Crated Weight (Lbs.)	410
Horsepower	1
Amps	12.5
Daily Kwh Usage	17.35
*No sign version available.	



# TOAM-48-HC~TSL01\*


## MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	48 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>1</sup> / <sub>2</sub> inches 1219 x 757 x 1994 mm
Shelf Size (WxD)	43 <sup>13</sup> / <sub>16</sub> x 15 <sup>15</sup> / <sub>32</sub> inches 1100 x 393 mm
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 375
Trailer Loads	40' Container - 22, 53' Trailer Load - 29
Crated Weight (Lbs.)	530
Horsepower	¾
Amps	7.6
Daily Kwh Usage	25.91
*No sign version available.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	48 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>1</sup> / <sub>2</sub> inches 1219 x 757 x 1994 mm
Shelf Size (WxD)	43 <sup>13</sup> / <sub>16</sub> x 15 <sup>15</sup> / <sub>32</sub> inches 1100 x 393 mm
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 375
Trailer Loads	40' Container - 22, 53' Trailer Load - 29
Crated Weight (Lbs.)	545
Horsepower	<sup>3</sup> / <sub>4</sub>
Amps	7.6
Daily Kwh Usage	26.65
*No sign version available.	

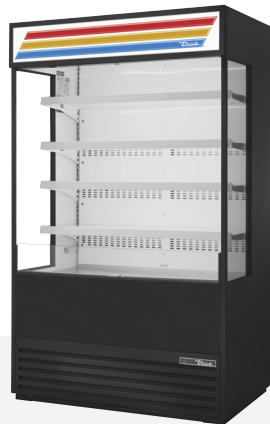

# TOAM-60-HC~TSL01\*

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	60 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>1</sup> / <sub>2</sub> inches 1524 x 757 x 1994 mm
Shelf Size (WxD)	55 <sup>31</sup> / <sub>32</sub> x 15 <sup>15</sup> / <sub>32</sub> inches 1422 x 393 mm
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 494
Trailer Loads	40' Container - 14, 53' Trailer Load - 19
Crated Weight (Lbs.)	580
Horsepower	(2) <sup>3</sup> / <sub>4</sub>
Amps	12.2
Daily Kwh Usage	TBD
*No sign version available.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	60 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>1</sup> / <sub>2</sub> inches 1524 x 757 x 1994 mm
Shelf Size (WxD)	55 <sup>31</sup> / <sub>32</sub> x 15 <sup>17</sup> / <sub>32</sub> inches 1422 x 395 mm
Capacity (20 oz.)	Standard Shelving: 4 Cantilever Shelves - 494
Trailer Loads	40' Container - 14, 53' Trailer Load - 19
Crated Weight (Lbs.)	580
Horsepower	(2) <sup>3</sup> / <sub>4</sub>
Amps	12.2
Daily Kwh Usage	TBD
*No sign version available.	



# TOAM-72-HC~TSL01\*

## MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	72 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>1</sup> / <sub>2</sub> inches 1829 x 757 x 1994 mm
Shelf Size (WxD)	33 <sup>11</sup> / <sub>16</sub> x 15 <sup>7</sup> / <sub>16</sub> inches 1100 x 393 mm
Capacity (20 oz.)	Standard Shelving: 8 Cantilever Shelves - 578
Trailer Loads	40' Container - 13, 53' Trailer Load - 17
Crated Weight (Lbs.)	760
Horsepower	<sup>3</sup> / <sub>4</sub>
Amps	14.9
Daily Kwh Usage	33.38
*No sign version available.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	72 x 29 <sup>7</sup> / <sub>8</sub> x 78 <sup>1</sup> / <sub>2</sub> inches 1829 x 757 x 1994 mm
Shelf Size (WxD)	33 <sup>11</sup> / <sub>16</sub> x 15 <sup>17</sup> / <sub>16</sub> inches 1100 x 393 mm
Capacity (20 oz.)	Standard Shelving: 8 Cantilever Shelves - 578
Trailer Loads	40' Container - 13, 53' Trailer Load - 17
Crated Weight (Lbs.)	765
Horsepower	<sup>3</sup> / <sub>4</sub>
Amps	14.9
Daily Kwh Usage	34.54
*No sign version available.	



## MODEL SPECIFICATIONS

Cabinet Dimensions (WxDxH)	30 $\frac{1}{4}$ x 32 $\frac{1}{8}$ x 56 $\frac{3}{8}$ inches 769 x 816 x 1432 mm
Shelf Size (WxD)	25 $\frac{11}{16}$ x 17 $\frac{1}{2}$ inches 653 x 445 mm
Capacity (20 oz.)	Standard Shelving: 3 Wire Shelves - 153 Shelving Options: <i>Trueflex</i> . (3) - 144
Trailer Loads	40' Container - 26, 53' Trailer Load - 34
Crated Weight (Lbs.)	280
Horsepower	$\frac{3}{4}$
Amps	7.0
Daily Kwh Usage	10.03







The logo for TruWE Refrigeration is centered on a blue gradient background. It features the word "truwe" in a stylized, italicized, lowercase font with a registered trademark symbol (®) to its right. Below this, the word "REFRIGERATION" is written in a clean, uppercase, sans-serif font. To the left of the text is a faint, light blue leaf-like graphic. In the bottom left corner, there is a dark grey geometric shape resembling a stylized arrow or a corner of a square.

*truwe*®  
REFRIGERATION



[truemfg.com](http://truemfg.com)

The Industry's Most Complete Refrigeration Source™

2001 East Terra Lane  
O'Fallon, MO 63366-4434 USA  
t 636.240.2400  
tf 888.818.8783  
f 636.980.3541  
Parts 800.424.8783  
Parts fax 636.272.9471  
e [truesales@truemfg.com](mailto:truesales@truemfg.com)

Warranty +1 855 878 9277  
Warranty fax +1 636 980 8510  
Warranty email [warrantyinquiries@truemfg.com](mailto:warrantyinquiries@truemfg.com)  
Technical +1 855 372 1368  
Technical email [service@truemfg.com](mailto:service@truemfg.com)



CVM®, TAC®, TOAM™, TVM® & GDM® are a registered trademarks of True Manufacturing Company.

DF\_263227\_01.26