



TRUE FOOD SERVICE EQUIPMENT, INC. • 2001 East Terra Lane • O'Fallon, Missouri 63366-4434  
ph. 636.240.2400 • toll free 800.325.6152 • fax 636.272.2408 • parts fax 636.272.9471 • www.truemfg.com

PROJECT NAME	LOCATION		AIA #
ITEM #	QTY	MODEL #	SIS #


# SPEC SERIES®

ROLL-IN SOLID SWING DOOR FREEZER

models	STR2FRI-2S	STA2FRI-2S	STG2FRI-2S
--------	------------	------------	------------



## plan view

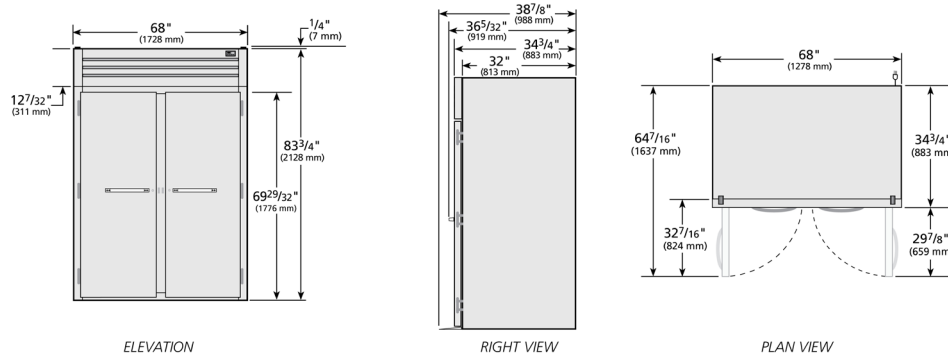

### STR2FRI-2S

Exterior	Stainless steel door, front & sides.
Interior	Stainless steel side walls, back, floor, door liner, & ceiling.

### STA2FRI-2S

Exterior	Stainless steel door, front & sides.
Interior	Aluminum side walls & back. Stainless steel floor & ceiling.

### STG2FRI-2S

Exterior	Stainless steel door, with matching aluminum sides.
Interior	Aluminum side walls & back. Stainless steel floor & ceiling.

### SPECIFICATIONS

Dimensions	in.	mm.
Length	68	1728
Depth	34 3/4	883
Height	83 3/4	2128
Electrical	U.S.	International
Horsepower	1 1/2	N/A
Amps	8.0	N/A
Voltage	115/208-230/60	
NEMA	14-20P	
Cord Length	9 ft.	2.74 M.



115/208-230/1  
NEMA-14-20R

† Depth does not include 4 1/4" (108 mm) for ramp.

\* Height does not include 1" (26 mm) for system mechanical components.

Note: Requires 115/208-230/60Hz, single phase, 3 pole, 4 wire circuit.

Specifications subject to change without notice.  
Chart dimensions are rounded up to the nearest 1/8" (millimeters rounded up to the next whole number).



APPROVALS

AVAILABLE AT



PROJECT NAME	LOCATION		AIA #
ITEM #	QTY	MODEL #	SIS #

# SPEC SERIES®

ROLL-IN SOLID SWING DOOR FREEZER

models

STR2FRI-2S

STA2FRI-2S

STG2FRI-2S



## standard features

### REFRIGERATION SYSTEM

- Factory engineered, self-contained, expansion valve (TXV) system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & 0.02 global warming potential (GWP).
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser maintains -10°F (-23.3°C) cabinet temperature. Ideal for both frozen foods and ice cream.
- Sealed, cast iron, self-lubricating evaporator fan motors and larger fan blades give True roll-in's a more efficient low velocity, high volume airflow design. This unique design ensures faster temperature recovery and shorter run times in the busiest of foodservice environments.
- Top mounted refrigeration system with evaporator positioned out of food zone to maximize capacity.
- Automatic defrost system time-initiated, temperature-terminated. Saves energy consumption and provides shortest possible defrost cycle.
- Automatic evaporator fan motor delay during defrost cycle.

### CABINET CONSTRUCTION

- Insulation - Entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Designed to accept roll-in racks (inboard castors) with maximum dimensions of 27"L x 29"D x 66"H (686 mm x 737 mm x 1677 mm) (supplied by others).
- One (1) heavy gauge stainless steel ramp.

### DOORS

- Lifetime guaranteed bolt style door locks standard.
- Lifetime guaranteed heavy duty all metal working door handle.
- Positive seal self-closing door with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, Three (3) per door section.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

### LIGHTING

- Incandescent interior lighting, safety shielded.

### MODEL FEATURES

- Exterior digital temperature display, available with either °F or °C.
- Evaporator epoxy coated to eliminate the potential of corrosion
- Backguard improves airflow.
- Interior bumpers protect cabinet walls from abuse caused by roll-in carts.
- NSF/ANSI Standard 7 compliant for open food product.

### ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/208-230/60Hz single phase, 3 pole, 4 wire, 20 amp dedicated outlet. Cord and plug set included.

### OPTIONAL FEATURES/ACCESSORIES

(upcharge & lead times may apply)

- Stainless back. (STR, STA, STG)

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Model	Elevation	Right	Plan	3D	Back
ST( )2FRI-2S					